




[+ HARNESSING](#)
[HEAT SHRINK BOOTS](#)

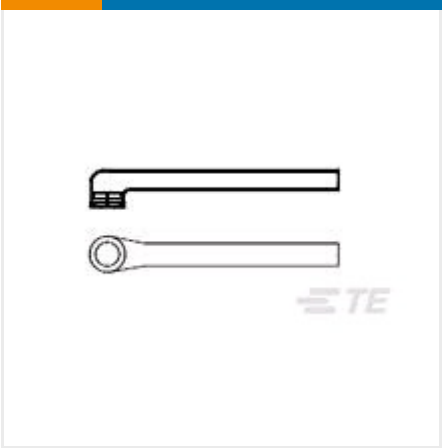

✓ Active

TE CONNECTIVITY (TE)
222D211-4/86-0
[Raychem](#) | [CAP](#) , [CRPS](#)

222D211-4/86-0
TE Internal Number: 492575-000
Alias ID: 2-1193684-8

[EU RoHS Compliant](#)
[EU ELV Compliant](#)

Lipped Yes
Operating Temperature Range (°C) -55 – 105
Fluid/Chemical Resistance Suitable for occasional exposure to fluids
Adhesive Options /86 Precoat, -55 – 105°C (-67 – 221°F)
Material Systems Code 10

[↓](#) **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings

Boot, 90 Deg., With Lip
PDF
English

Product Specifications

Product Specification

Thermofit Polyolefin Molded Components Flame-Retarded, Flexible, Heat-Shrinkable
PDF
English

Product Environmental Compliance

Safety Data Sheet

Aliphatic Polyamide Based Adhesives.

PDF

Dutch

Aliphatic Polyamide Based Adhesives.

PDF

English

Aliphatic Polyamide Based Adhesives.

PDF

French

Aliphatic Polyamide Based Adhesives.

PDF

German

Aliphatic Polyamide Based Adhesives.

PDF

Italian

Aliphatic Polyamide Based Adhesives.

PDF

Spanish

Aliphatic Polyamide Based Adhesives.

PDF

Swedish

EPS Heat Shrinkable Polymeric Products

PDF

English

EPS Heat Shrinkable Polymeric Products

PDF

French

EPS Heat Shrinkable Polymeric Products

PDF

German

EPS Heat Shrinkable Polymeric Products

PDF

Italian

EPS Heat Shrinkable Polymeric Products

PDF

Norwegian

EPS Heat Shrinkable Polymeric Products

PDF

Spanish

EPS Heat Shrinkable Polymeric Products

PDF

Swedish

EPS Heat Shrinkable Polymeric Products

PDF

Dutch

EPS Heat Shrinkable Polymeric Products

PDF
Danish

Aliphatic Polyamide Based Adhesives.

PDF
English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Body Features

Material Systems Code 10
Adhesive Pre-Coat Yes
Entry Size (Braided or Magneform Adapter) 5, 6
Entry Size (Spin Coupling Adapter) 4 – 5
Entry Size (Tinel-Lock Adapter) 4, 5
Material Modified Polyolefin

Dimensions

Cable Diameter Range 6.4 – 14 mm [.252 – .551 in]
Wire/Cable Outside Diameter .276 in, .3 in, .31 in, .35 in, .39 in, .43 in, .433 in, .47 in, 10 mm, 11 mm, 12 mm, 7 mm, 8 mm, 9 mm

Usage Conditions

Operating Temperature Range (°C) -55 – 105

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No
Approved Standards SAE AS I 81765/1, Type II, UL 224, File E85381

Other

Fluid/Chemical Resistance Suitable for occasional exposure to fluids
Adhesive Options /86 Precoat, -55 – 105°C (-67 – 221°F)
Adhesive Type High Performance Pre-Coat Adhesive

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance

PDF
