

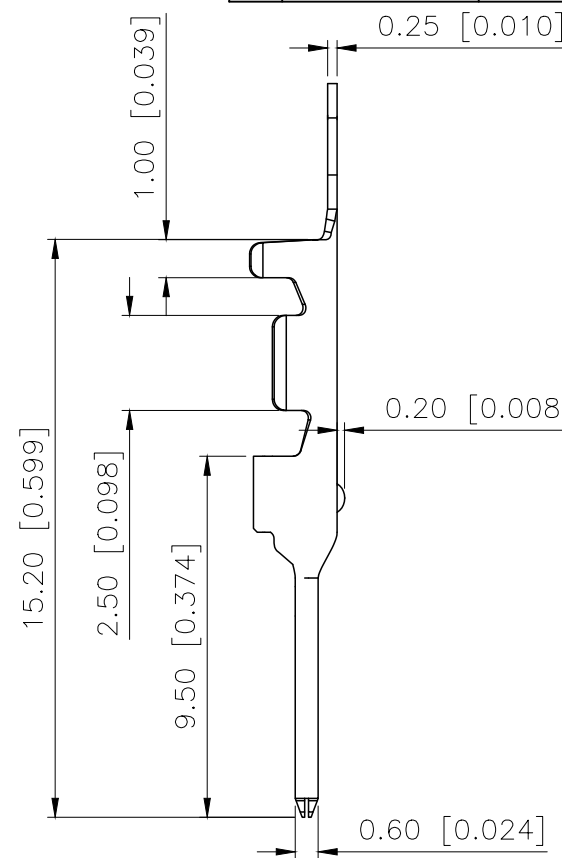
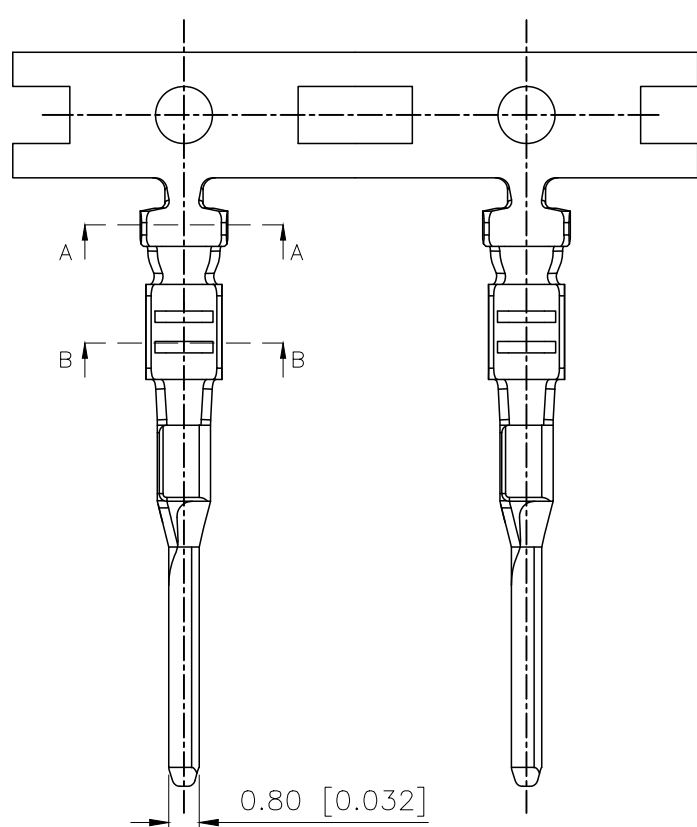



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.3	阿树



Specifications:
规格:
Voltage rating:100V AC/DC
额定电压: 100V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-25℃-+85℃
温度范围: -25℃-+85℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:
K 205001 I M-P SN
① ② ③④ ⑤ ⑥
①K:XKBTEK-Car Connector
②XKB Series No
③Category:T-Terminal
④Categoiy:M-Male Terminal
⑤Material:P-Phosphor Bronze
⑥Plating:SN-Plated Tin

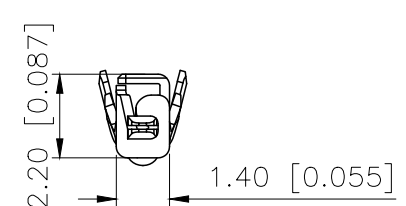

K205001TM-PSN	Phosphor Bronze	AWG#22-26	K205001HM
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.0mm automotive connector
CHECKED		UNIT:	mm/in	PART NO.: K205001TM-PSN
APPROVED		SIZE:	A4	DWG NO.: