

Cost optimized pulse transformers for THT mounting



Approvals and Compliances

Description

- High insulation rating (>2.2 kVAC) between the primary and the secondary windings
- Small coupling capacitances between primary and secondary windings limit transient feedback from the power supply side to the control electronics
- Cost optimized design
- The defined partial discharge voltage guarantees an effectively unlimited serviceable life

Applications

- Galvanic separation of drive- and power-circuit
- Mainly used in ignition circuits with Thyristors, Triacs, power transistors and IGBT's
- DC/DC converters
- Line coupling transformers in high speed data transmission

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated voltage	up to 500 VAC
Voltage Time Integral	200 - 500 Vμs
Pulse Rise Time	0.5 - 1.5 μs
Turns Ratio	1:1, 1:1:1, 3:1:1
Terminal Type	THT
Weight	7 - 15 g
Material: Housing	UL 94V-0
Sealing Compound	UL 94V-0

Climatic Category	25/100/21 acc. to IEC 60068-1
Allowable Operation Temp.	-25 °C to 70 °C

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.


Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm]

Case 14-8

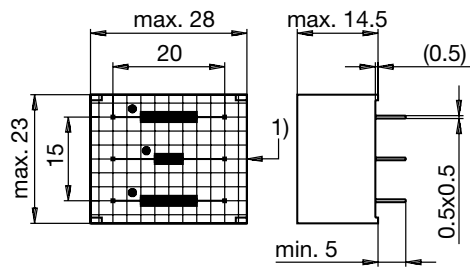


1) Prim.

Case 05-7

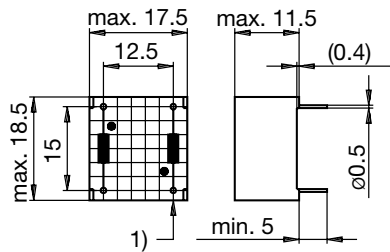


1) Prim.

Case 14-9

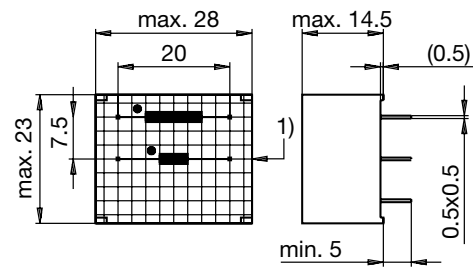

Case 05-8

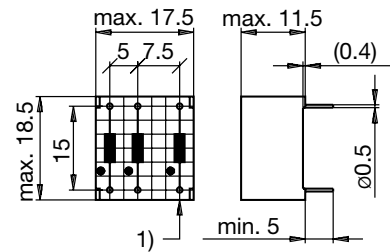

1) Prim.

All Variants

Turns Ratio	T_r [μs]	I_{ign} [A]	U_{VAC} [V]	U_{isol} [kV]	$U_s \times T_w$ [Vμs]	L_s [mH]	R_p [Ω]	R_s [Ω]	C_C [pF]	P_m [W]	Weight [g]	Packing unit [pcs.]	Housings	Order Number
1:1	1	0.1	500	3.5	500	8.0	1.2	1.2	10	0.5	7 g	50	05-7	IL-11-0001
1:1	1	0.25	500	3.5	250	2.5	0.6	0.6	8	0.5	7 g	50	05-7	IL-11-0002
1:1	1	0.25	380	4.0	300	3.0	0.6	0.6	8	1.1	15 g	50	14-9	IL-21-0001
1:1:1	0.5	0.1	380	3.5	250	2.5	0.6	0.6	10	0.5	7 g	50	05-8	IL-10-0001
1:1:1	1	0.25	380	3.5	200	1.5	0.4	0.4	8	0.5	7 g	50	05-8	IL-10-0003
1:1:1	1.5	0.25	380	4.0	300	3.0	0.6	0.6	8	1.1	15 g	50	14-8	IL-20-0001
3:1:1	0.7	0.1	380	3.5	200	16.5	2.3	0.5	10	0.5	7 g	50	05-8	IL-10-0002

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter:

[IL-10-0001](#) [IL-10-0002](#) [IL-10-0003](#) [IL-11-0002](#) [IL-20-0001](#) [IL-21-0001](#) [ILR-10-0001](#) [ILR-11-0001](#) [ILR-11-0002](#)
[ILR-11-0003](#) [IPH-21-0001](#) [ISNA-0235-D103](#) [ISNA-0239-D202](#) [ISNA-0249-D104](#) [ISNB-0239-D202](#) [ISNB-0249-D101](#)
[ISNF-0135-D101](#) [ISNF-0239-D202](#) [ISNF-0249-D101](#) [ISRA-0235-D103](#) [ISRA-0239-D502](#) [ISRA-0249-D104](#) [ISRB-](#)
[0239-D502](#) [ISRB-0249-D101](#) [ISRF-0235-D101](#) [ISRF-0239-D502](#) [ISRF-0249-D101](#) [II-22-0001](#)