

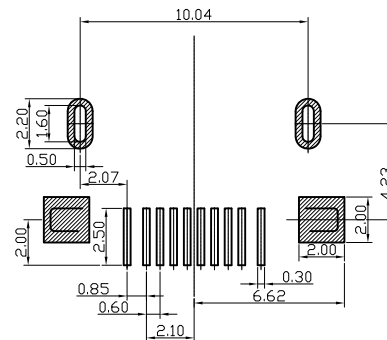

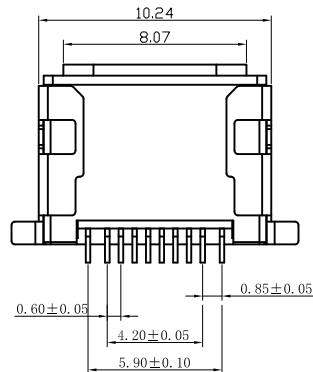



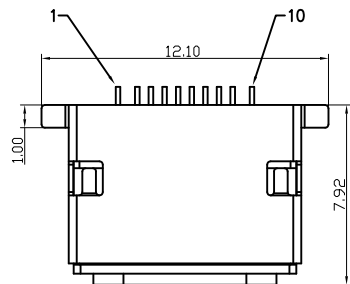

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
GENERAL TOLERANCE +/-0.05



NOTES:

1)MATERIAL:
HOUSING:THERMOPLASTIC,UL 94V-0,
COLOR:BLACK
CONTACT:COPPER ALLOY T=0.20mm
SHELL A:STAINLESS STEEL T=0.40mm
SHELL B:STAINLESS STEEL T=0.25mm

2.SPECIFICATION;

2.1,CURRENT RATING:2.4A Max.

2.2,DIELECTRIC WITHSTANDING

VOLTAGE:500 V(ac) for 1 min.

2.3,CONTACT RESISTANCE: 100 mΩ Max.

2.4,INSULATION RESISTANCE: 1000 MΩ Min.

2.5,TOTAL MATING FORCE: 4.0 Kgf Max.

2.6,TOTAL UNMATING FORCE: 0.2 Kgf Min.

2.7,DURABILITY: 5000 cycles Min

3.PLATING:

CONTACT:1u" MIN GOLD PLATING ON CONTACT AREA

G/F PLATING ON SOLDER TAILS

SHELL: G/F PLATING ON SOLDER TAILS

Pin No.	SIGNAL
1	DETECT_1
2	GND
3	DP1
4	DN1
5	ACC1
6	PWR
7	DN1
8	DP1
9	ACC2
10	DETECT_2
SHELL_A	GND
SHELL_B	GND

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5°
X	±0.20	X	±2°
XX	±0.15	XX	±1°
XXX	±0.10	XXX	±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	许裕强	制图料号	914-614A2025S10200
SCALE	1:1	审核	郭治富	产品名称	AF苹果款15四脚前插后贴不锈钢LCP黑胶SMT卷带
日期	2016-09-09	核准	黄国荣	角法	版本
DATE		APPD		VIEW	VER