




Connectors > PCB Connectors > PCB Headers & Receptacles

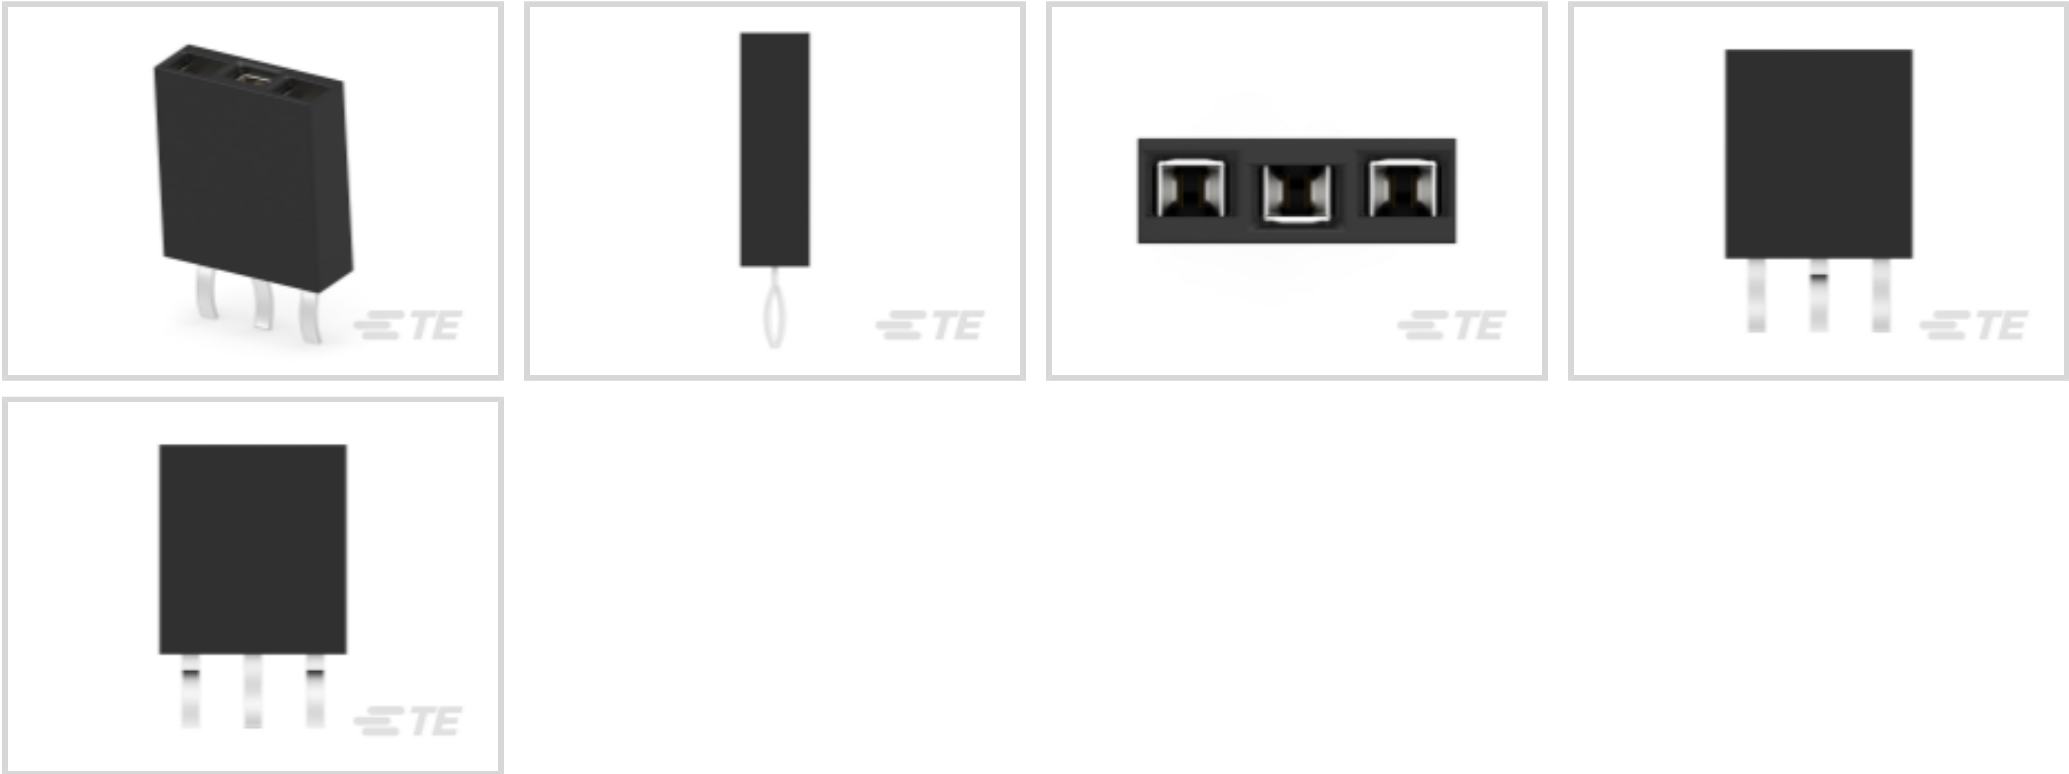

PCB Connector Assembly Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **3**

Number of Rows: **1**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	3
Number of Rows	1

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features



Contact Protection Type	Closed Entry Housing
Mating Square Post Dimension	.63 mm[.024 in]
PCB Contact Termination Area Plating Material Thickness	2.4 – 4 µm[94.488 – 157.48 µin]
Contact Layout	Inline
Mating Pin Diameter	.63 mm[.024 in]
Contact Shape & Form	Square
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
	30 µin
Contact Type	Socket
Contact Current Rating (Max)	3 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.69 mm[.027 in]
Termination Post & Tail Length	3.1 mm[.122 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Retention Type	Retention Solder Tails
PCB Mount Retention	With
Connector Mounting Type	Board Mount

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Polyester - GF

Dimensions

Connector Height	8.5 mm[.335 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature Range	-65 – 125 °C[-85 – 257 °F][-67 – 221 °F]
-----------------------------	--

Operation/Application

Solder Process Feature	Board Standoff
------------------------	----------------



Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	240
Packaging Method	Carton

Product Compliance


For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 1241150-3
3P MOD II BREAK AWAY HDR,SMD, BLISTER




TE Part # 826629-3
3P AMPMODU II



TE Part # 826647-3
3P AMPMODU II STIFT LEI

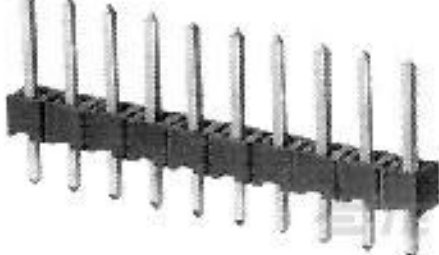

TE Part # 826646-3
3P AMPMODU II STIFT LEI

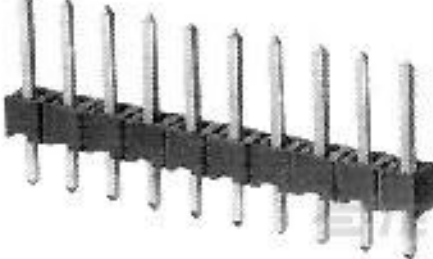

TE Part # 826648-3
3P AMPMODU II STIFT LEI



TE Part # 826652-3
3P AMPMODU II STIFT LEI



TE Part # 826631-3
3P AMPMODU II STIFT LEI




TE Part # 826630-3
3P AMPMODU II STIFT LEI



TE Part # 826654-3
3P AMPMODU II STIFT LEI



TE Part # 966306-3
MOD2 ST-LEI SMD 3P



TE Part # 966710-3
MODU II PIN HEADER, SGL ROW, SMD- 3 POS



TE Part # 215267-3
AMPMODU,BREAK-AWAY



TE Part # 826655-3
3P MOD2 STIFT LEI

Also in the Series | [AMPMODU HV-100/HV-190](#)



PCB Headers & Receptacles(321)

Customers Also Bought






TE Part #5102153-3
A/L UNIV HDR 16P VERT



TE Part #5747462-2
HD-20 RCPT 37P RA 590

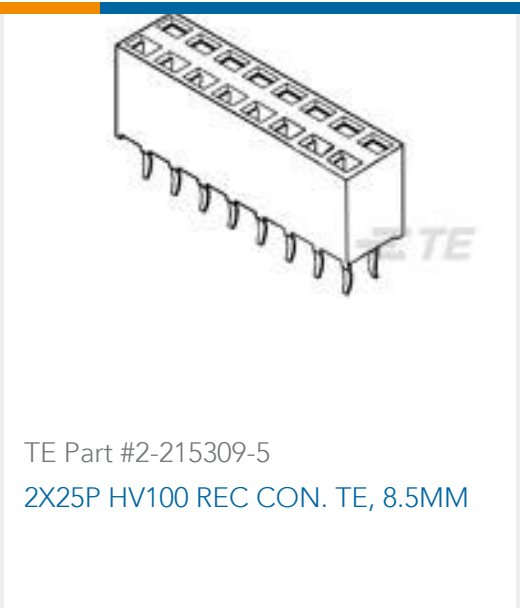

TE Part #2-215309-5
2X25P HV100 REC CON. TE, 8.5MM



TE Part #1-86479-5
06 MODII HDR DRRA UNSHRD .100



TE Part #5-146256-5
10 MODII HDR DRST B/A .100CL L



TE Part #5-103168-5
14 MODII HDR DRST SHRD .100CL



TE Part #6-1437558-8
MTE106D=(MSTE) SW TOG
WATERPRO



TE Part #1-5645502-1
SKT MS S4 BN SN-AU 10M



TE Part #3-330808-8
SOCKET,MIN-SPR W/KO AU SER-1



TE Part #1-770972-0
12P MINI UMN L R/A HDR ASSY LF

Documents

Product Drawings
3P HV100 REC CON. TE, 8.5MM
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_215299-3_F.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_215299-3_F.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_215299-3_F.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Product Specification

English