


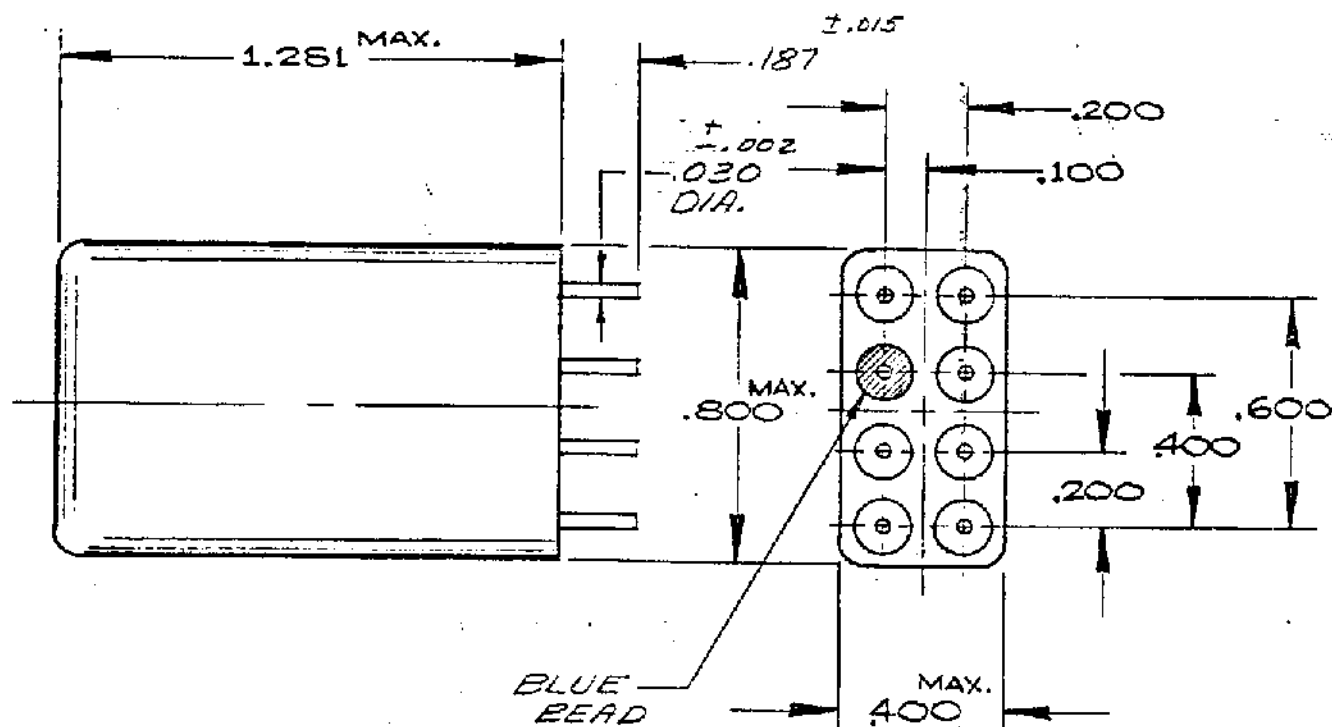

CUSTOMER DATA SHEET

COIL: @ 25°C


RESISTANCE 5000±10% OHMS

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.0 VDC

MUST RELEASE 1.4 VDC

TOLERANCE UNLESS OTHERWISE SPECIFIED
DECIMALS ±.005 FRACTIONAL ± 1/64

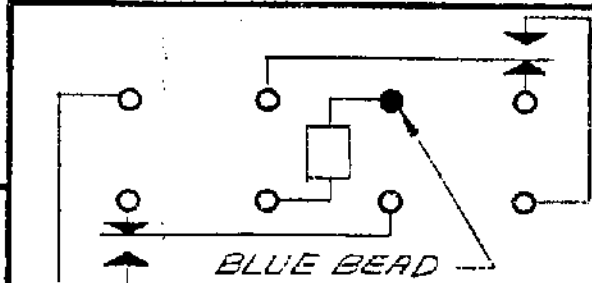

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS AT 15 g's

SHOCK 50 g's 11±1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CONTACT RATING:
LOW LEVEL TO 2AMPS @ 28VDC
RESISTIVE LOAD FOR 100,000
OPERATIONS MIN.

DR. 10-30-84

CK. OSW



Communications
Instruments, Inc.

CUST. CII Standard

CUST. NO.

TYPE "SF" RELAY

SF 5201 W 00