

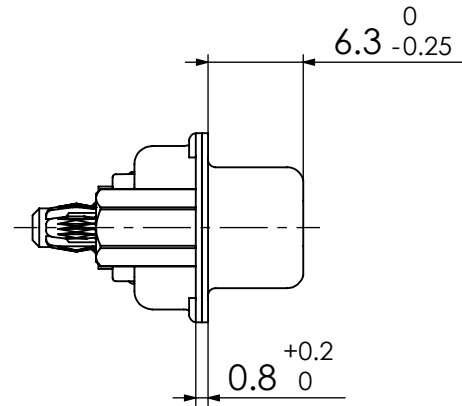
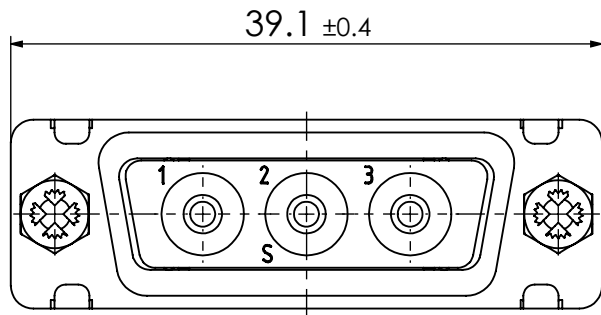
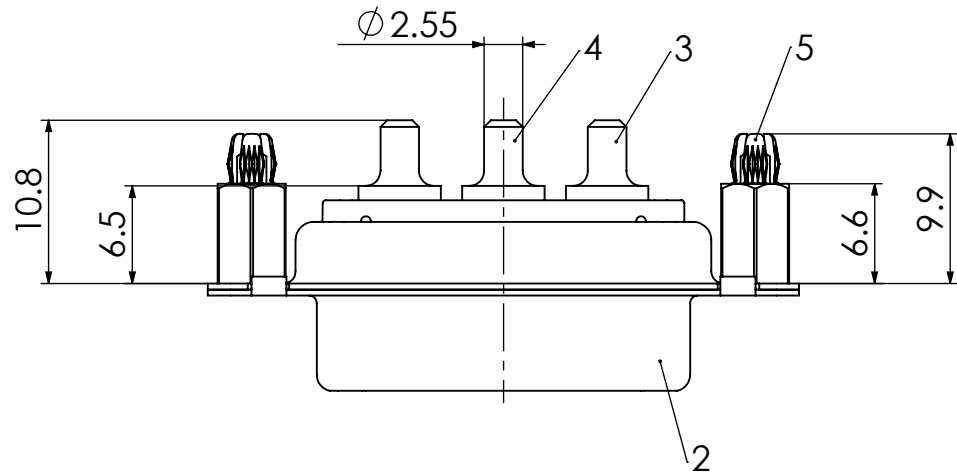


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.

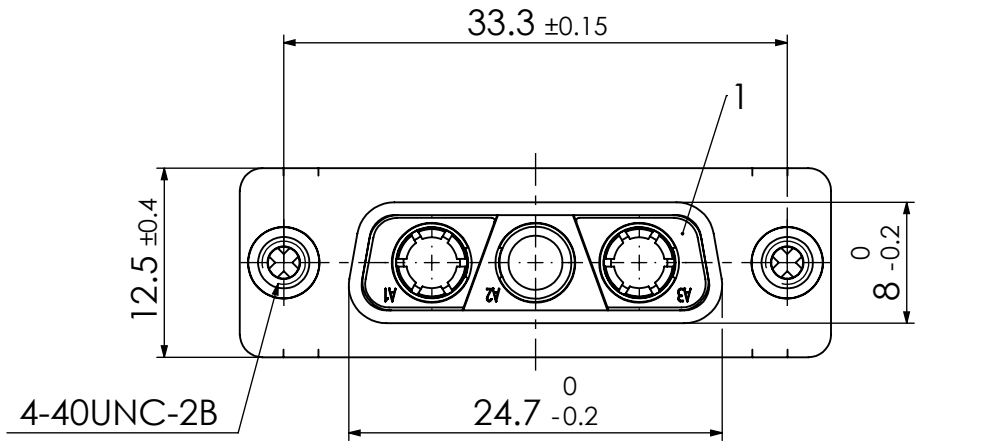

PCB hole pattern, mounting side

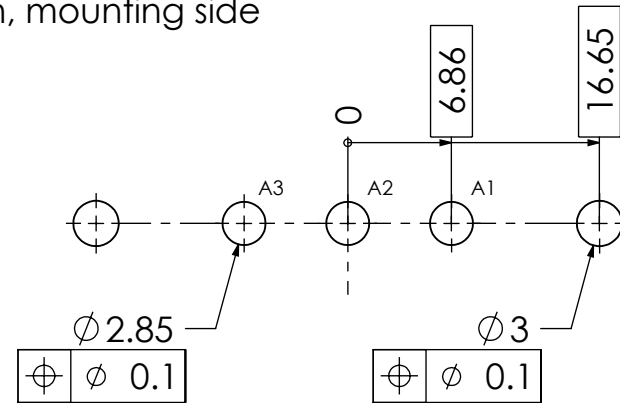

RoHS compliant
by exemption

5	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
4	1	High power contact	FMP014P104	20A
3	2	High power contact	FMP014S104	20A
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	black
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex			
					CURRENT REVISION			FCT D-Sub Mixed-Layout Connector			
					DRWN: DRAWN BY msteinbrueck 21-09-2023						
					APPR: APPR BY mteubel 22-11-2023						
								PRODUCT CUSTOMER DRAWING			
	2		24410		INITIAL REVISION						
	1				DRWN: DRAWN BY Markus.Jobst 11-03-2011			MATERIAL NUMBER 1731070807		REVISION 2	
	REV.		CH.-NO.		APPR: APPR BY Birgit.Rinder 14-03-2011						
REPLACEMENT FOR: 1731070807_Rev. A1			FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER F3W3SC-1733		CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1