

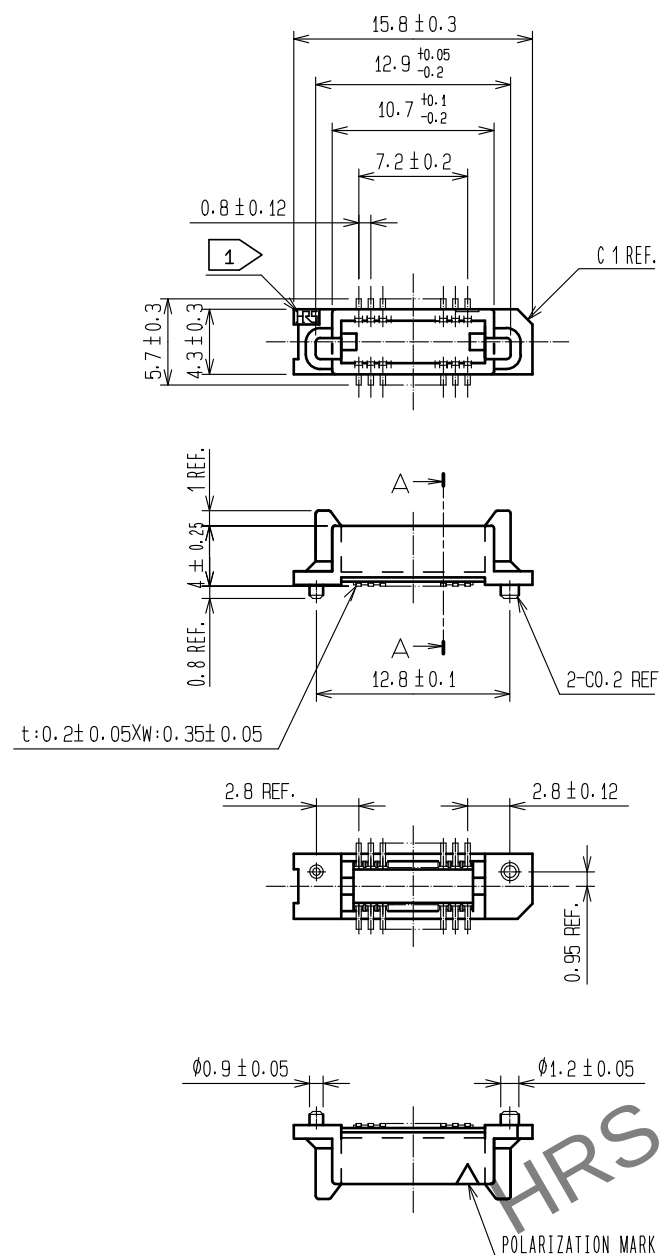



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

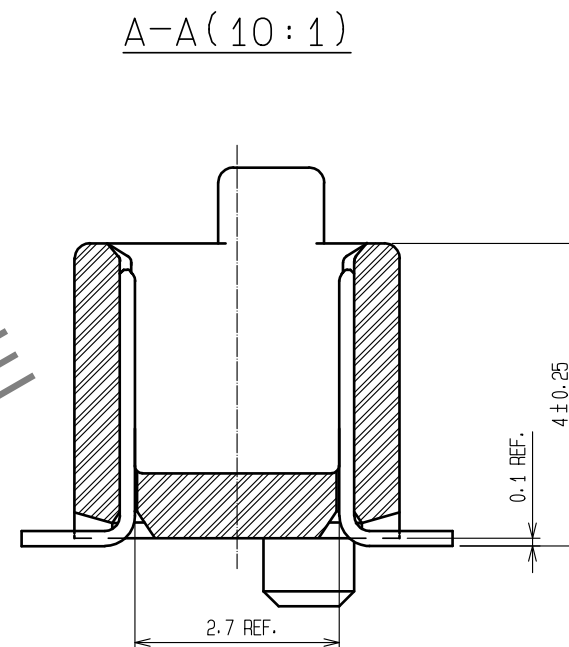

RECOMMENDED P.C.B LAND PATTERN (MOUNT SIDE)
(RECOMMENDED METAL MASK THICKNESS: $t=0.15$)

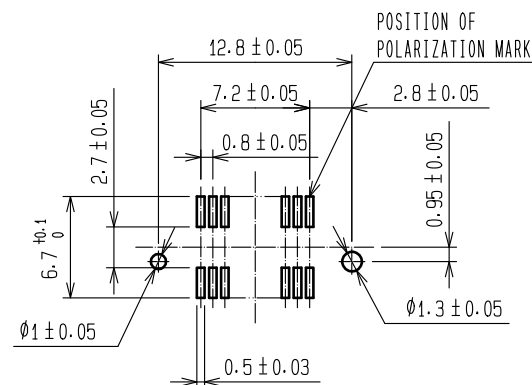

- NOTE
- 1 HRS MARK SHALL BE OPTIONL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
 - 4 FOR MODIFICATION, ETC. PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

			4		POLYESTER	COVER TAPE			
			3		POLYSTYRENE	EMBOSSED CARRIER TAPE			
1	POLYPHENYLENE SULFIDE	LIGHT BROWN UL94V-0		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm MIN			
						LEAD AREA:GOLD 0.05μm MIN			
						UNDER PLATING:NICKEL 1μm MIN			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	HS. OKAWA		15.07.17	DRAWING NO.	EDC-084962-92-22		
		CHECKED	HT. YAMAGUCHI		15.07.17	PART NO.	FX6-20P-0.8SV(92)		
		DESIGNED	MT. ITANO		15.07.17	CODE NO.	CL576-0001-3-92		
		DRAWN	KN. YAMAZAKI		15.07.16				
									

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

