


APS COTS+ for High Reliability Applications

Surface Mount NPO, X7R and X8R/L MLCCs

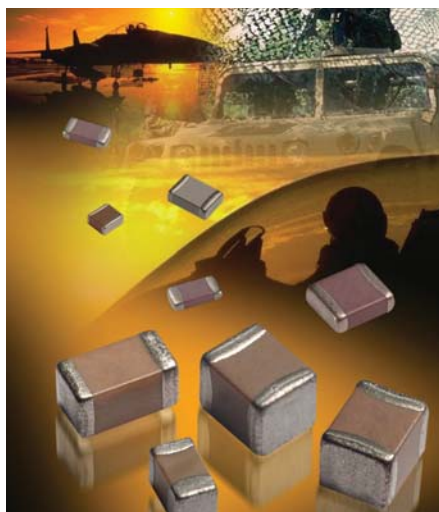

AVX's APS COTS+ series of multilayer ceramic capacitors offers the customer a high reliability solution with an ultralow failure rate, ≤ 1 ppb, in a variety of case sizes and voltages. The APS range encompasses a wide range of dielectric types to meet the customer's requirements from low temperature/voltage capacitance change dielectric, NPO, to high preforming capacitance voltage X7R to high temperature reliability dielectrics, X8R/L.

APS capacitors have a wider capacitance range than MIL spec parts that satisfies the need for higher CV demands and board space saving requirements. Each production lot is extensively tested and removes the requirement for customer specific drawings. The testing regime uses many of the MIL-STD test methods as per MIL-PRF-55681 and has a field failure rate of less than 1 ppb. The APS testing series uses AVX's unique in-house maverick testing detection system that eliminates infant mortality failures.

Applications suitable for APS include Industrial, Telecommunications, Aviation, and Military. The APS is available with a range of different termination finishes, Flexiterm®, Nickel / Tin and Tin with Pb¹. Flexiterm® technology delivers improved thermo-mechanical stress resistance.

AVX'S APS RELIABILITY TEST SUMMARY

- 100 % Visual Inspection
- DPA
- IR, DF, Cap, DWV
- Maverick Lot Review
- Thermal Shock
- 85/85 Testing
- Life Testing 125°C 2xRV
- C of C with every Order
- Quarterly Data Package

Dielectric	Temperature/Percentage Cap Change
NPO	-30ppm +30ppm from -55°C to + 125°C
X7R	-15% +15% from -55°C to + 125°C
X8R	-15% +15% from -55°C to + 150°C
X8L	-15% +40% from -55°C to + 150°C

FEATURES

- The APS range has been extensively reliability tested as standard resulting in an ultralow failure rate, ≤ 1 ppb.
- The APS range is available with Flexiterm® that deliver's high thermo-mechanical stress resistance.
- High CV range enabling board space saving requirements.

HOW TO ORDER

AP03	5	A	104	K	Q	T	2	A
Size	Voltage	Dielectric	Capacitance Code (In pF)	Capacitance Tolerance	Failure Rate	Terminations	Packaging	Special Code
AP03=0603	16V = Y	NPO = A	2 Significant Digits +	J = $\pm 5\%$	Q = APS	T = Plated Ni and Sn**	2 = 7" Reel	A = Std. Product
AP05=0805	25V = 3	X7R = C	Number of Zeros	K = $\pm 10\%$		Z = FLEXITERM®***	4 = 13" Reel	
AP06=1206	50V = 5	X8R = F	e.g. 10 μ F = 106	M = $\pm 20\%$		B = 10% min lead		
AP10=1210	100V = 1	X8L = L				X = FLEXITERM® with 10% min lead		
AP12=1812	200V = 2							
AP20=2220	500V = 7							

Z,X for X7R only
**RoHS compliant

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.

APS COTS+ NP0 Series

Capacitance Range

	AP03 = 0603			AP05 = 0805			AP06 = 1206					AP10 = 1210			
	25V	50V	100V	25V	50V	100V	25V	50V	100V	200V	500V	25V	50V	100V	200V
100 10pF	G	G	G	J	J	J	J	J	J	J	J				
120 12	G	G	G	J	J	J	J	J	J	J	J				
150 15	G	G	G	J	J	J	J	J	J	J	J				
180 18	G	G	G	J	J	J	J	J	J	J	J				
220 22	G	G	G	J	J	J	J	J	J	J	J				
270 27	G	G	G	J	J	J	J	J	J	J	J				
330 33	G	G	G	J	J	J	J	J	J	J	J				
390 39	G	G	G	J	J	J	J	J	J	J	J				
470 47	G	G	G	J	J	J	J	J	J	J	J				
510 51	G	G	G	J	J	J	J	J	J	J	J				
560 56	G	G	G	J	J	J	J	J	J	J	J				
680 68	G	G	G	J	J	J	J	J	J	J	J				
820 82	G	G	G	J	J	J	J	J	J	J	J				
101 100	G	G	G	J	J	J	J	J	J	J	J				
121 120	G	G	G	J	J	J	J	J	J	J	J				
151 150	G	G	G	J	J	J	J	J	J	J	J				
181 180	G	G	G	J	J	J	J	J	J	J	J				
221 220	G	G	G	J	J	J	J	J	J	J	J				
271 270	G	G	G	J	J	J	J	J	J	J	J				
331 330	G	G	G	J	J	J	J	J	J	J	J				
391 390	G	G		J	J	J	J	J	J	J	J				
471 470	G	G		J	J	J	J	J	J	J	J				
561 560				J	J	J	J	J	J	J	J				
681 680				J	J	J	J	J	J	J	J				
821 820				J	J	J	J	J	J	J	J				
102 1000				J	J	J	J	J	J	J	J	J	J	J	J
122 1200												J	J	M	M
152 1500												J	J	M	M
182 1800												J	J	M	M
222 2200												J	J	M	M
272 2700															
332 3300															
392 3900															
472 4700															
103 10nF															
	25V	50V	100V	25V	50V	100V	25V	50V	100V	200V	500V	25V	50V	100V	200V
	AP03 = 0603			AP05 = 0805			AP06 = 1206					AP10 = 1210			



Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max.	0.33	0.56	0.71	0.90	0.94	1.02	1.27	1.40	1.52	1.78	2.29	2.54	2.79
Thickness	(0.013)	(0.022)	(0.028)	(0.035)	(0.037)	(0.040)	(0.050)	(0.055)	(0.060)	(0.070)	(0.090)	(0.100)	(0.110)
	PAPER					EMBOSSED							

TS 16949, ISO 9001 Certified

APS COTS+ X7R Series

Capacitance Range

		AP03 = 0603					AP05 = 0805					AP06 = 1206						AP10 = 1210				AP12 = 1812		AP20 = 2220		
		16V	25V	50V	100V	200V	16V	25V	50V	100V	200V	16V	25V	50V	100V	200V	500V	16V	25V	50V	100V	50V	100V	25V	50V	100V
102	Cap 1000	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	K	K	K	K	K	K			
182	(pF) 1800	G	G	G	G		J	J	J	J	J	J	J	J	J	J	J	K	K	K	K	K	K			
222	2200	G	G	G	G		J	J	J	J	J	J	J	J	J	J	J	K	K	K	K	K	K			
332	3300	G	G	G	G		J	J	J	J	J	J	J	J	J	J	J	K	K	K	K	K	K			
472	4700	G	G	G	G		J	J	J	J	J	J	J	J	J	J	J	K	K	K	K	K	K			
103	0.01	G	G	G	G		J	J	J	J	J	J	J	J	J	J	J	K	K	K	K	K	K			
123	0.012	G	G	G			J	J	J	M		J	J	J	J	J		K	K	K	K	K	K			
153	0.015	G	G	G			J	J	J	M		J	J	J	J	J		K	K	K	K	K	K			
183	0.018	G	G	G			J	J	J	M		J	J	J	J	J		K	K	K	K	K	K			
223	0.022	G	G	G			J	J	J	M		J	J	J	J	J		K	K	K	K	K	K			
273	0.027	G	G	G			J	J	J	M		J	J	J	J	J		K	K	K	K	K	K			
333	0.033	G	G	G			J	J	J	M		J	J	J	J	J		K	K	K	K	K	K			
473	0.047	G	G	G			J	J	J	M		J	J	J	M	J		K	K	K	K	K	K			
563	0.056	G	G	G			J	J	J	M		J	J	J	M	J		K	K	K	M	K	K			
683	0.068	G	G	G			J	J	J	M		J	J	J	M	J		K	K	K	M	K	K			
823	0.082	G	G	G			J	J	J	M		J	J	J	M	J		K	K	K	M	K	K			
104	0.1	G	G	G			J	J	M	M		J	J	J	M	J		K	K	K	M	K	K			
124	0.12						J	J	M	N		J	J	M	M			K	K	K	P	K	K			
154	0.15						M	N	M	N		J	J	M	M			K	K	K	P	K	K			
224	0.22						M	N	M	N		J	M	M	Q			M	M	M	P	M	M			
334	0.33						N	N	M	N		J	M	P	Q			P	P	P	Q	X	X			
474	0.47						N	N	M	N		M	M	P	Q			P	P	P	Q	X	X			
684	0.68						N	N	N			M	Q	Q	Q			P	P	Q	X	X	X			
105	Cap 1.0						N	N	N			M	Q	Q	Q			P	Q	Q	X	X	X			
155	(µF) 1.5											Q	Q	Q				P	Q	Z	Z	X	X			
225	2.2											Q	Q	Q				X	Z	Z	Z	Z	Z			
335	3.3											Q	Q					X	Z	Z	Z	Z				
475	4.7											Q	Q					X	Z	Z	Z	Z				
106	10																	Z	Z						Z	
226	22																								Z	
		16V	25V	50V	100V	200V	16V	25V	50V	100V	200V	16V	25V	50V	100V	200V	500V	16V	25V	50V	100V	50V	100V	25V	50V	100V
		AP03 = 0603					AP05 = 0805					AP06 = 1206						AP10 = 1210				AP12 = 1812		AP20 = 2220		
Letter		A	C	E	G	J	K	M	N	P	Q	X	Y	Z												
Max. Thickness		0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)												
		PAPER							EMBOSSED																	

TS 16949, ISO 9001 Certified

APS COTS+ X8R/L Series

Capacitance Range

X8R

SIZE			AP03 = 0603		AP05 = 0805		AP06 = 1206	
	WVDC		25V	50V	25V	50V	25V	50V
331	Cap 330		G	G	J	J		
471	(pF) 470		G	G	J	J		
681	680		G	G	J	J		
102	1000		G	G	J	J	J	J
152	1500		G	G	J	J	J	J
222	2200		G	G	J	J	J	J
332	3300		G	G	J	J	J	J
472	4700		G	G	J	J	J	J
682	6800		G	G	J	J	J	J
103	Cap 0.01		G	G	J	J	J	J
153	(μF) 0.015		G	G	J	J	J	J
223	0.022		G	G	J	J	J	J
333	0.033		G	G	J	J	J	J
473	0.047		G	G	J	J	J	J
683	0.068		G		N	N	M	M
104	0.1				N	N	M	M
154	0.15				N	N	M	M
224	0.22				N		M	M
334	0.33						M	M
474	0.47						M	
684	0.68							
105	1							
	WVDC		25V	50V	25V	50V	25V	50V
SIZE			0603		0805		1206	

X8L

SIZE			AP03 = 0603			AP05 = 0805			AP06 = 1206			
	WVDC		25V	50V	100V	25V	50V	100V	16V	25V	50V	100V
331	Cap 330			G	G		J	J				
471	(pF) 470			G	G		J	J				
681	680			G	G		J	J				
102	1000			G	G		J	J				
152	1500			G	G		J	J			J	J
222	2200			G	G		J	J			J	J
332	3300			G	G		J	J			J	J
472	4700			G	G		J	J			J	J
682	6800			G	G		J	J			J	J
103	Cap 0.01			G	G		J	J			J	J
153	(μF) 0.015		G	G		J	J	J			J	J
223	0.022		G	G		J	J	J			J	J
333	0.033		G	G		J	J	N			J	J
473	0.047		G	G		J	J	N			J	J
683	0.068		G	G		J	J				J	J
104	0.1		G	G		J	J				J	M
154	0.15					J	N		J	J	J	Q
224	0.22					N	N		J	J	J	Q
334	0.33					N			J	M	P	Q
474	0.47					N			M	M	P	
684	0.68								M			
105	1								M			
	WVDC		25V	50V	100V	25V	50V	100V	16V	25V	50V	100V
SIZE			0603			0805			1206			

Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER					EMBOSSED							



TS 16949, ISO 9001 Certified