

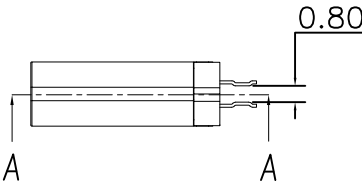


REV	MODIFICATION	DATE

- NOTES:
SPECIFICATION:
- 1. CURRENT RATING: 5.0A MAX
 - 2. VOLTAGE: 100 VAC
 - 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 - 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 - 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - 6. LNSERTION FORCE : 5N~20N
 - 7. UNMATING FORCE: 8N~20N
 - 8. DURABILITY: 10,000 CYCLES

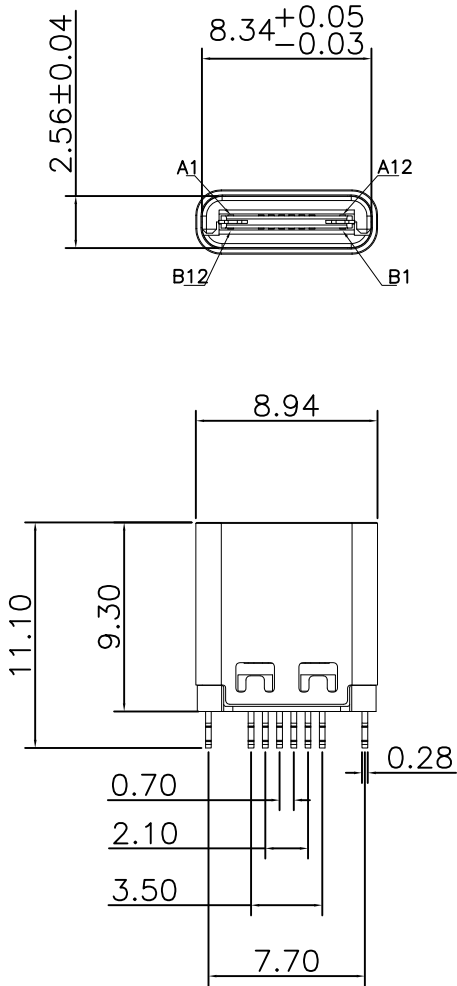

A-A

PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SUB2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SUB1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

产品图 PRODUCT CHART DWG 公差一览表 TOLERANCE UNLESS OTHERWISE				深圳市精拓金电子有限公司						
X.	±0.25	X.	±5.°	单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	918-418K2022E40005	
.X	±0.20	.X	±2.°	比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NAME	TYPE-C3.1母座无边夹板间距0.8 长度9.3LCP黑胶 16PIN	
.XX	±0.15	.XX	±1.°	日期 DATE	2018.06.20	核准 APPD	黄国荣	角法 VIEW	版本 REV	AD
.XXX	±0.10	.XXX	±0.5°							