


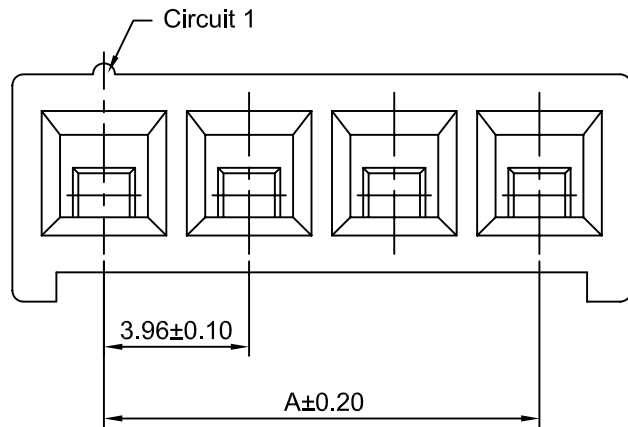

Ordering Information:


B3952H-XP - ***
1 2

1.Part No.




2.Material:

(blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,GWT 750°C

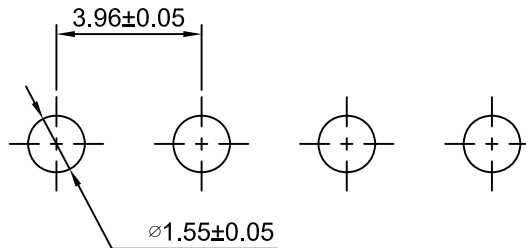

P.C.B LAYOUT

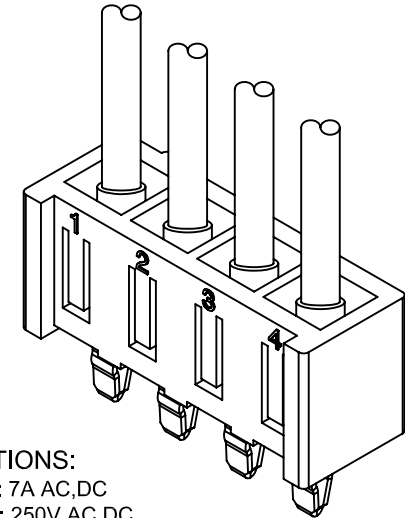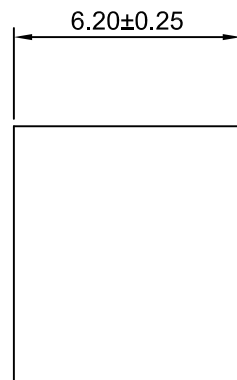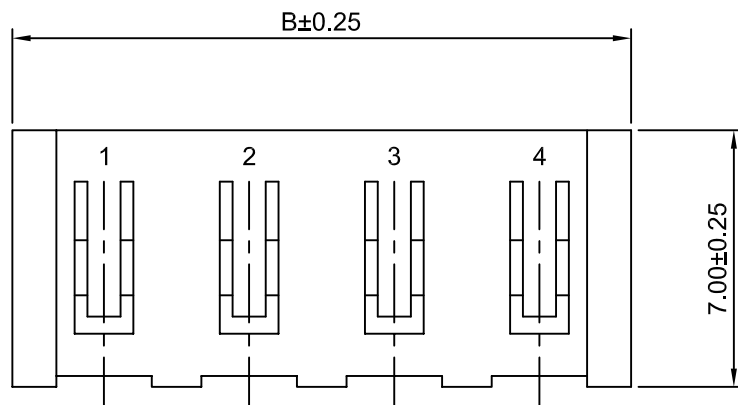

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material:Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.96	9P	31.68	36.68
3P	7.92	12.92	10P	35.64	40.64
4P	11.88	16.88	11P	39.60	44.60
5P	15.84	20.84	12P	43.56	48.56
6P	19.80	24.80	13P	47.52	52.52
7P	23.76	28.76	14P	51.48	56.48
8P	27.72	32.72	15P	55.44	60.44

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance

A1	CHANGE THE SIZE	2014.04.30	x.x≤0.25	ANGLE±
A0	NEW RELEASE	2013.11.28	x.xx≤0.20	
REV	DESCRIPTION	DATE	x.xxx≤0.15	

Title :

3.96mm PITCH

HOUSING

DRAW NO :

B3952H-XP

REV
A1