

Description

The SX5N10LI uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a Battery protection or in other Switching application.

General Features

$V_{DS} = 100V$ $I_D = 5.8A$


$R_{DS(ON)} < 135m\Omega$ @ $V_{GS}=10V$

Application



Lithium battery protection

Wireless impact

Mobile phone fast charging



SOT-23-6L

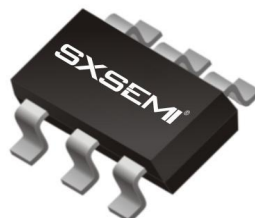

Absolute Maximum Ratings (TC=25°C unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C = 25^\circ C$	Drain Current, $V_{GS} @ 10V$	5.8	A
$I_D @ T_C = 100^\circ C$	Drain Current, $V_{GS} @ 10V$	3.5	A
I_{DM}	Pulsed Drain Current ¹	24.3	A
$P_D @ T_C = 25^\circ C$	Total Power Dissipation	1.5	W
EAS	Single Pulse Avalanche Energy ⁴	6.1	mJ
TSTG	Storage Temperature Range	-55 to 150	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ C$
$R_{\theta JA}$	Maximum Thermal Resistance, Junction to ambient	125	$^\circ C/W$
$R_{\theta JC}$	Maximum Thermal Resistance, Junction to case	8.1	$^\circ C/W$

Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
V(BR)DSS	Drain-Source Breakdown Voltage	VGS=0V, ID=250μA	100	107	-	V
IDSS	Zero Gate Voltage Drain Current	VDS=100V, VGS=0V,	-	-	1.0	μA
IGSS	Gate to Body Leakage Current	VDS=0V, VGS=±20V	-	-	±100	nA
VGS(th)	Gate Threshold Voltage	VDS=VGS, ID=250μA	1.0	1.6	2.5	V
RDS(on)	Static Drain-Source on-Resistance note3	VGS=10V, ID=10A	-	100	135	mΩ
		VGS=4.5V, ID=8A	-	115	155	mΩ
Ciss	Input Capacitance	VDS=25V, VGS=0V, f=1.0MHz	-	610	-	pF
Coss	Output Capacitance		-	40	-	pF
Crss	Reverse Transfer Capacitance		-	25	-	pF
Qg	Total Gate Charge	VDS=30V, ID=10A, VGS=10V	-	12	-	nC
Qgs	Gate-Source Charge		-	2.2	-	nC
Qgd	Gate-Drain("Miller") Charge		-	2.5	-	nC
td(on)	Turn-on Delay Time	VDS=30V, ID=5A, RG=1.8Ω, VGS=10V	-	7	-	ns
tr	Turn-on Rise Time		-	5	-	ns
td(off)	Turn-off Delay Time		-	16	-	ns
tf	Turn-off Fall Time		-	6	-	ns
IS	Continuous Source Current1,5	VG=VD=0V , Force Current	-	-	10	A
ISM	Pulsed Source Current2,5		-	-	40	A
VSD	Diode Forward Voltage2	VGS=0V, IS=10A	-	-	1.2	V
trr	Body Diode Reverse Recovery Time	IF=10A, dI/dt=100A/μs	-	21	-	ns
Qrr	Body Diode Reverse Recovery Charge		-	21	-	nC

Notes:

- 1、The data tested by surface mounted on a 1 inch 2 FR-4 board with 2OZ copper.
- 2、The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%
- 3、The power dissipation is limited by 150°C junction temperature
- 4、The data is theoretically the same as I D and I DM , in real applications , should be limited by total power dissipation

Typical Characteristics

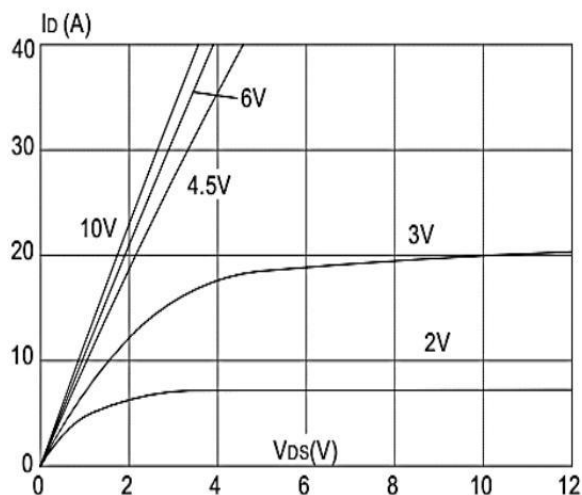


Figure1: Output Characteristics

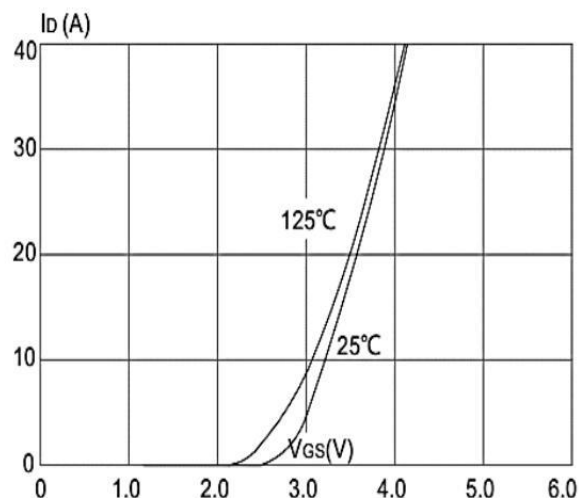


Figure 2: Typical Transfer Characteristics

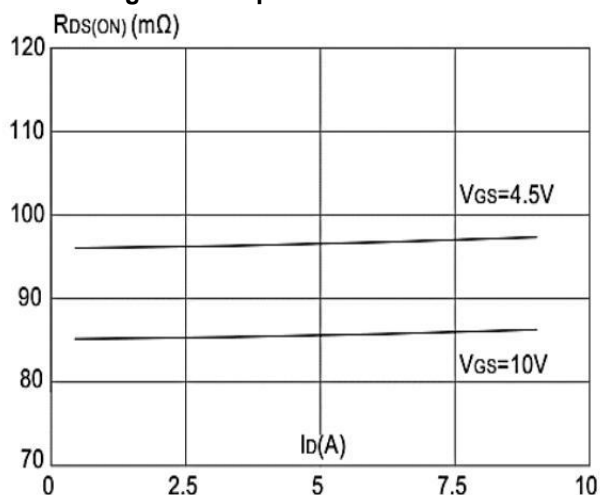


Figure 3: On-resistance vs. Drain Current

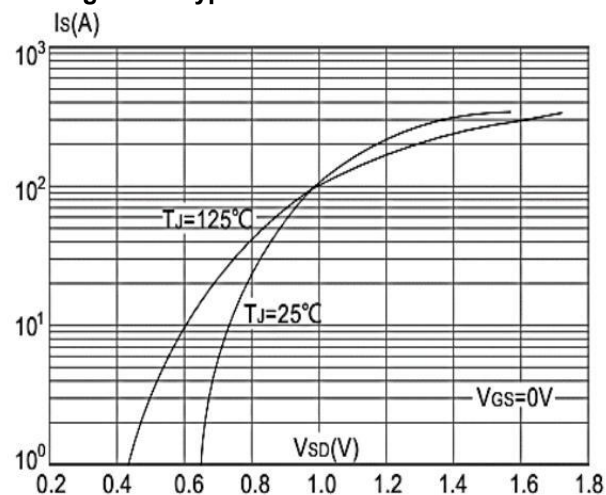


Figure 4: Body Diode Characteristics

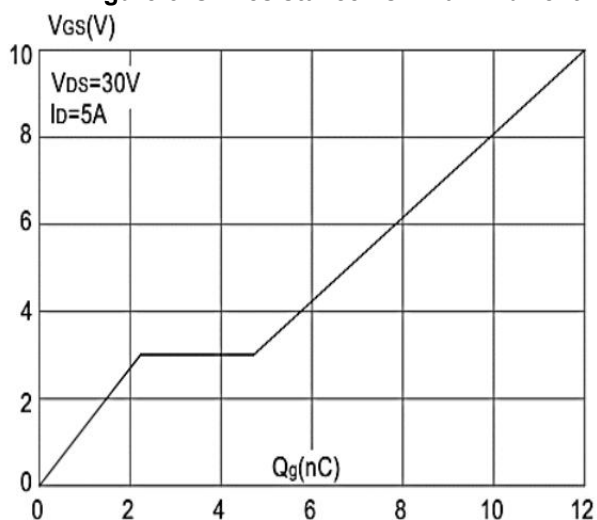


Figure 5: Gate Charge Characteristics

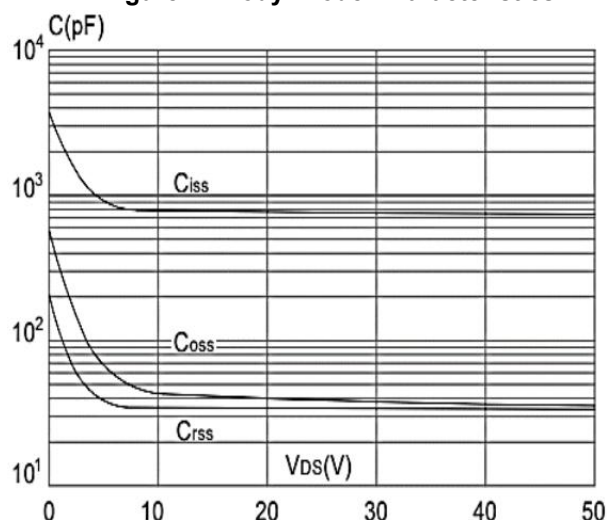


Figure 6: Capacitance Characteristics

Typical Characteristics

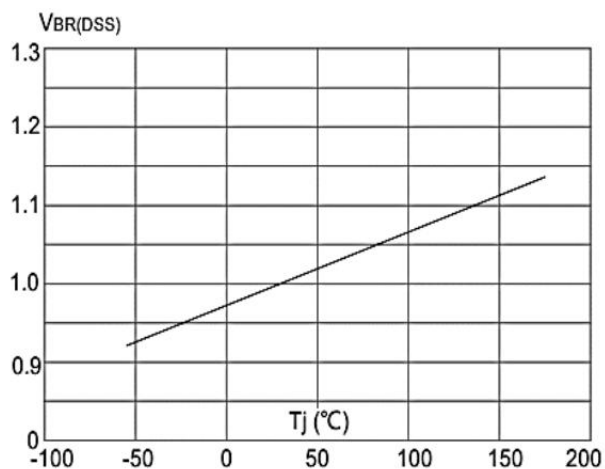


Figure 7: Normalized Breakdown Voltage vs Junction Temperature

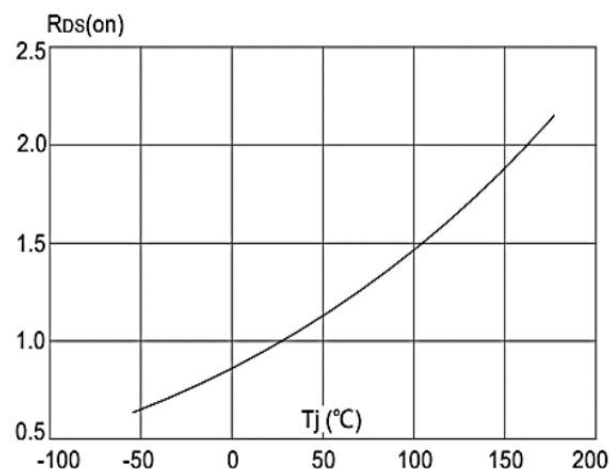


Figure 8: Normalized on Resistance vs. Junction Temperature

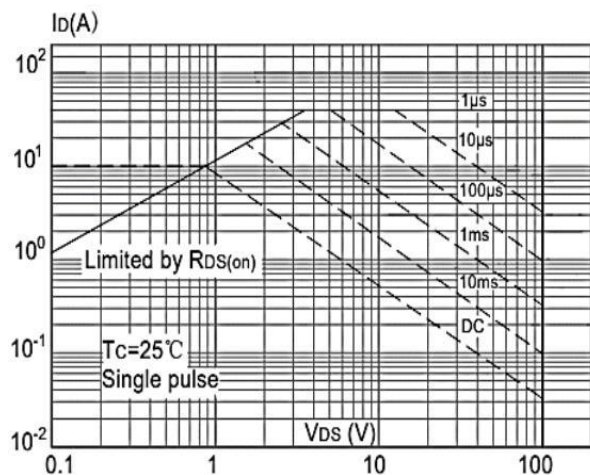


Figure 9: Maximum Safe Operating Area

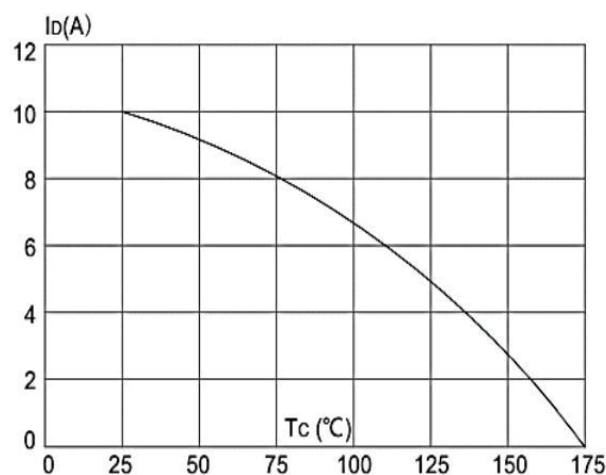


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature


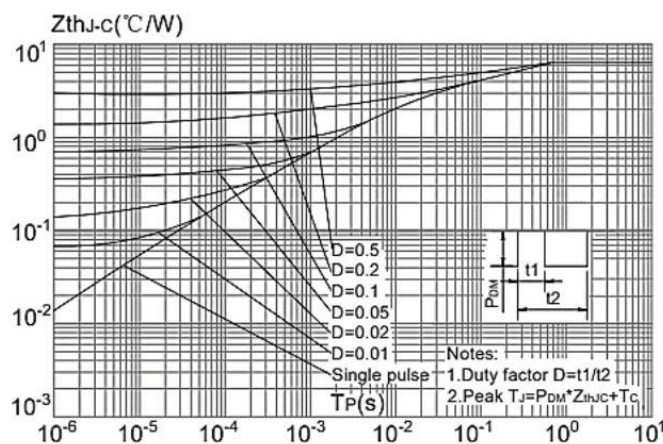


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambien

MOSFET Package Mechanical Data-SOT23-6-Single

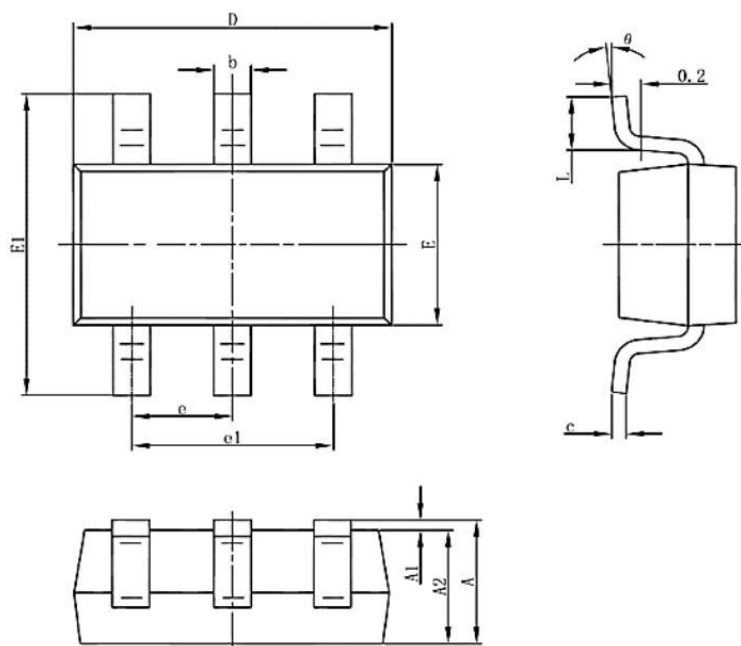

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
C	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 (BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0	8	0	8

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
TAPING	SOT23-6L		3000