




A
B
C
D
E
F

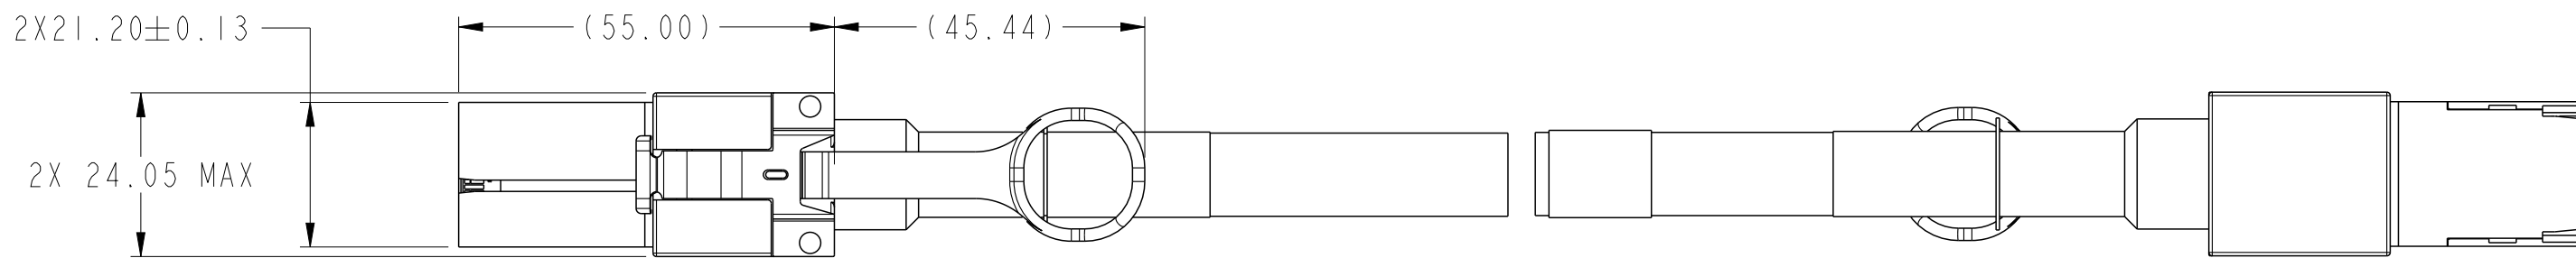


END P1
CABLE CONNECTOR
CXP (PASSIVE) PLUG

END P2
CABLE CONNECTOR
CXP (PASSIVE) PLUG

VIEW A
VIEW A

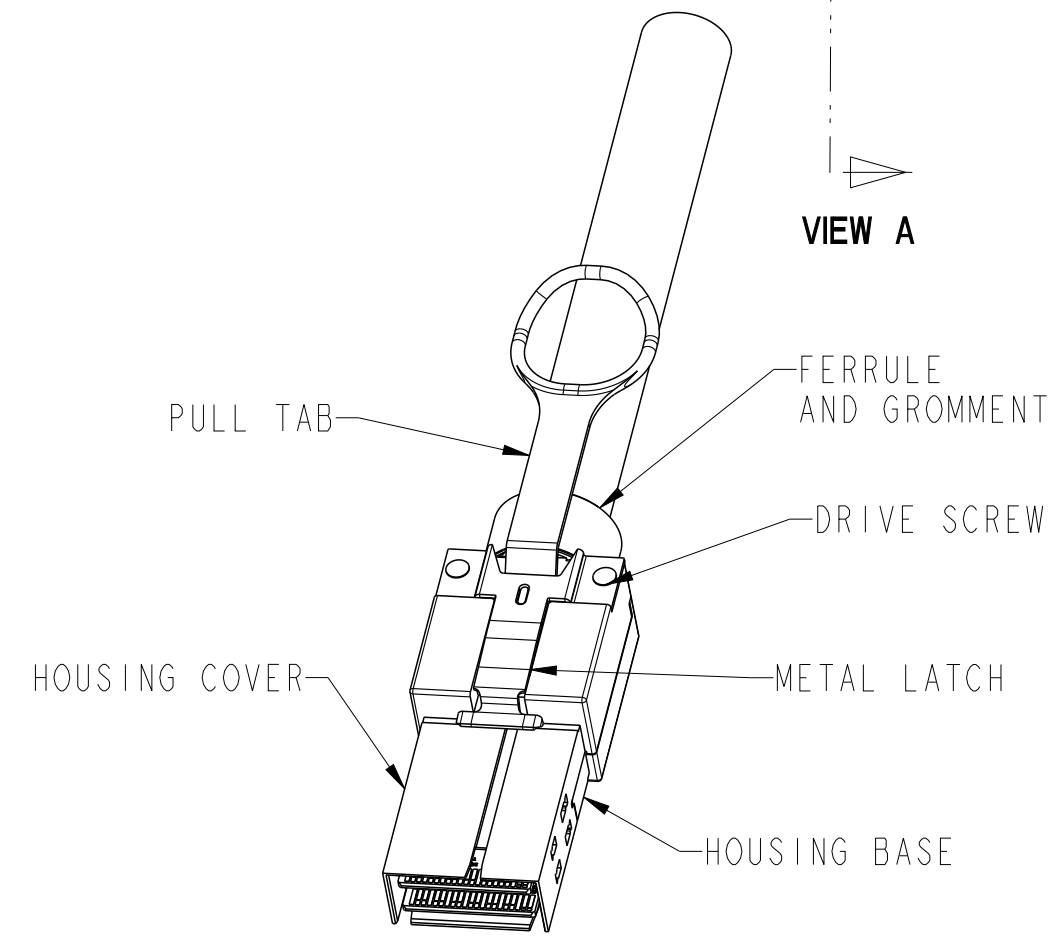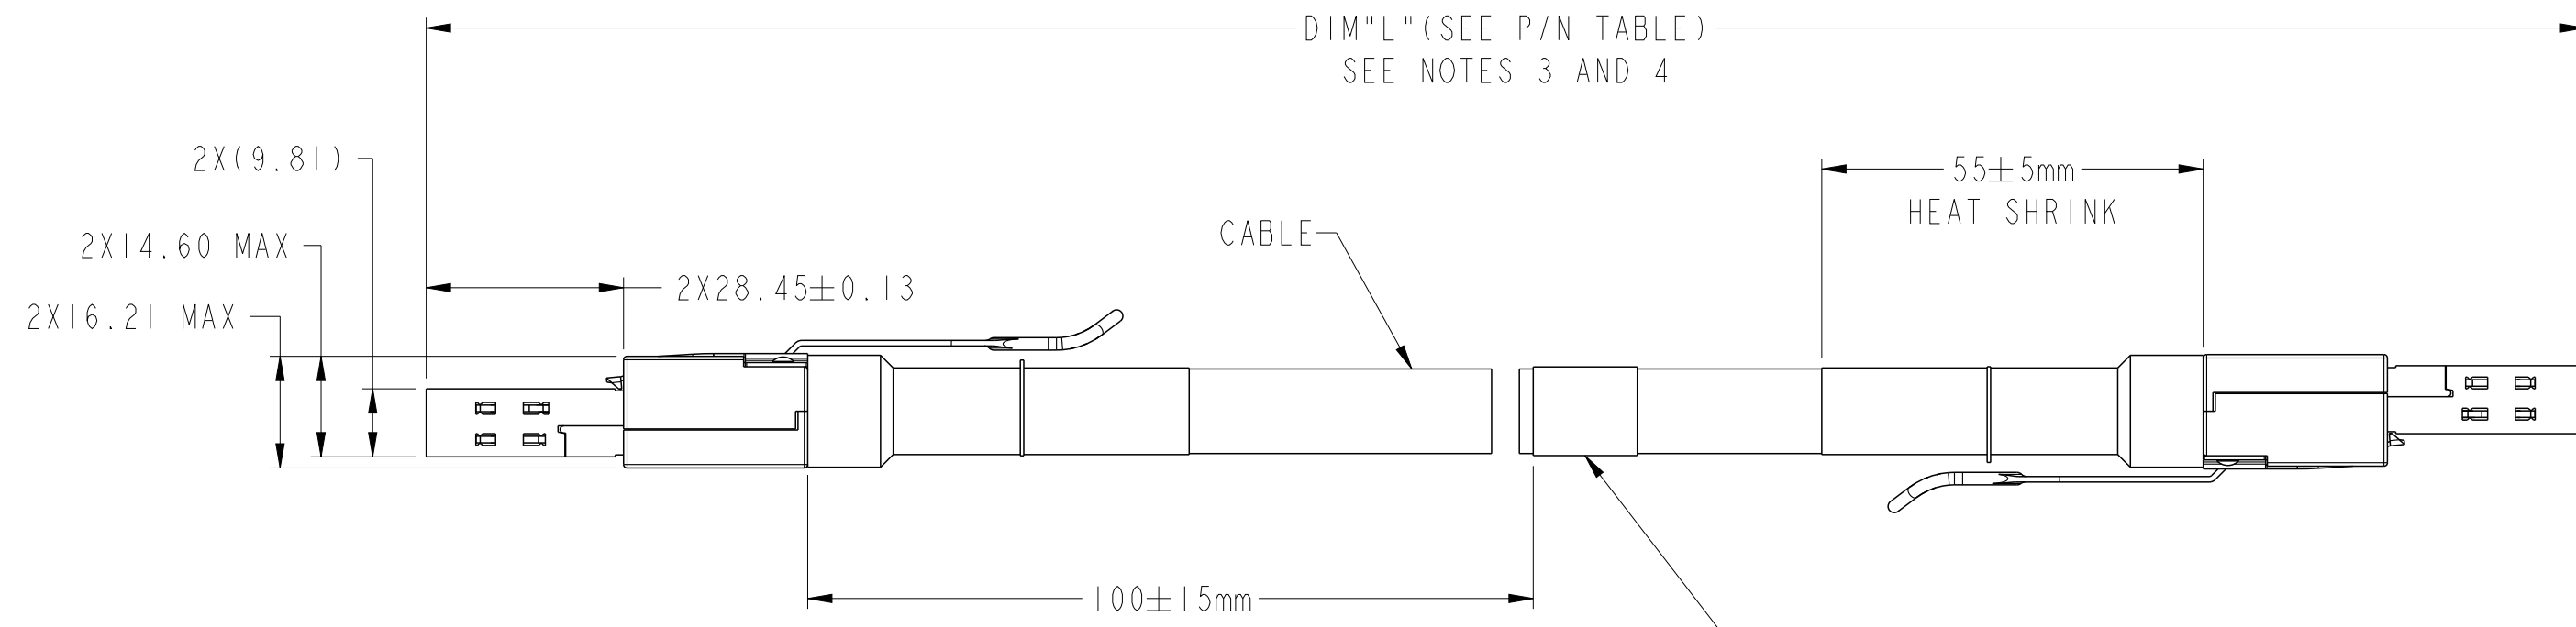


P1
ISOMETRIC VIEW
SCALE 2:1

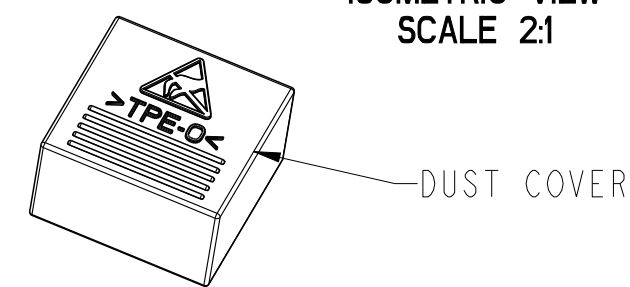

DUST COVER

spec ref	-	dr	Ingram, Debora	2011/04/16	projection	MM	size	A2	scale	1:2
tolerance std	ASME Y14.5	eng	Alex Xu	2016/11/18	chr	-	ecn no	ELX-N-25380-1		
		appr	Michael Zhou	2019/04/18	product family	-	rel level	Released		
surface	✓	linear	0.X	±Y	Amphenol FCi www.fci.com			title FINAL ASSEMBLY - STANDARD CXP PASSIVE CABLE ASSEMBLY		dwg no 10116951
			0.XX	±Y						
			0.XXX	±Y						
ASME Y14.5	angular		0°	±Y°	cat. no.			Product - Customer Drw		sheet 1 of 3

12345678

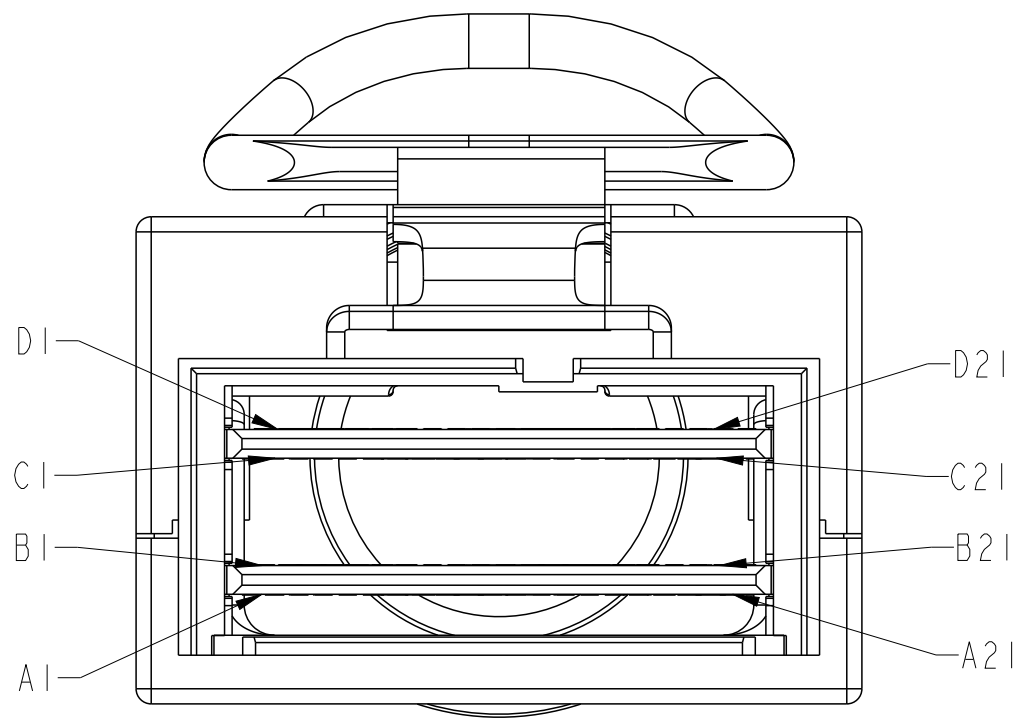

VIEW A-A
PIN ASSIGNMENTS
SCALE 4:1

P1					P2		
PIN	F	SIGNAL	TYPE		PIN	F	SIGNAL
B1	L	GND	C	C	D1	L	GND
B2	S	Tx0p	----▷		D2	S	Rx0p
B3	S	Tx0n	----▷		D3	S	Rx0n
B4	L	GND	C	C	D4	L	GND
B5	S	Tx2p	----▷		D5	S	Rx2p
B6	S	Tx2n	----▷		D6	S	Rx2n
B7	L	GND	C	C	D7	L	GND
B8	S	Tx4p	----▷		D8	S	Rx4p
B9	S	Tx4n	----▷		D9	S	Rx4n
B10	L	GND	C	C	D10	L	GND
B11	S	Tx6p	----▷		D11	S	Rx6p
B12	S	Tx6n	----▷		D12	S	Rx6n
B13	L	GND	C	C	D13	L	GND
B14	S	Tx8p	----▷		D14	S	Rx8p
B15	S	Tx8n	----▷		D15	S	Rx8n
B16	L	GND	C	C	D16	L	GND
B17	S	Tx10p	----▷		D17	S	Rx10p
B18	S	Tx10n	----▷		D18	S	Rx10n
B19	L	GND	C	C	D19	L	GND
B20	S	VCC3.3-Tx	□	□	D20	M	VCC3.3-Rx
B21	S	VCC12-Tx	□	□	D21	M	VCC12-Rx
A1	L	GND	C	C	C1	L	GND
A2	S	Tx1p	----▷		C2	S	Rx1p
A3	S	Tx1n	----▷		C3	S	Rx1n
A4	L	GND	C	C	C4	L	GND
A5	S	Tx3p	----▷		C5	S	Rx3p
A6	S	Tx3n	----▷		C6	S	Rx3n
A7	L	GND	C	C	C7	L	GND
A8	S	Tx5p	----▷		C8	S	Rx5p
A9	S	Tx5n	----▷		C9	S	Rx5n
A10	L	GND	C	C	C10	L	GND
A11	S	Tx7p	----▷		C11	S	Rx7p
A12	S	Tx7n	----▷		C12	S	Rx7n
A13	L	GND	C	C	C13	L	GND
A14	S	Tx9p	----▷		C14	S	Rx9p
A15	S	Tx9n	----▷		C15	S	Rx9n
A16	L	GND	C	C	C16	L	GND
A17	S	Tx11p	----▷		C17	S	Rx11p
A18	S	Tx11n	----▷		C18	S	Rx11n
A19	L	GND	C	C	C19	L	GND
A20	S	SCL	□	□	C20	S	PRSNT_L
A21	S	SDA	□	□	C21	S	Int_L/Reset_L

P1					P2		
PIN	F	SIGNAL	TYPE		PIN	F	SIGNAL
C1	L	GND	C	C	A1	L	GND
C2	S	Rx1p	◀-----		A2	S	Tx1p
C3	S	Rx1n	◀-----		A3	S	Tx1n
C4	L	GND	C	C	A4	L	GND
C5	S	Rx3p	◀-----		A5	S	Tx3p
C6	S	Rx3n	◀-----		A6	S	Tx3n
C7	L	GND	C	C	A7	L	GND
C8	S	Rx5p	◀-----		A8	S	Tx5p
C9	S	Rx5n	◀-----		A9	S	Tx5n
C10	L	GND	C	C	A10	L	GND
C11	S	Rx7p	◀-----		A11	S	Tx7p
C12	S	Rx7n	◀-----		A12	S	Tx7n
C13	L	GND	C	C	A13	L	GND
C14	S	Rx9p	◀-----		A14	S	Tx9p
C15	S	Rx9n	◀-----		A15	S	Tx9n
C16	L	GND	C	C	A16	L	GND
C17	S	Rx11p	◀-----		A17	S	Tx11p
C18	S	Rx11n	◀-----		A18	S	Tx11n
C19	L	GND	C	C	A19	L	GND
C20	S	PRSENT_L	□	□	A20	S	SCL
C21	S	Int_L/Reset_L	□	□	A21	S	SDA
D1	L	GND	C	C	B1	L	GND
D2	S	Rx0p	◀-----		B2	S	Tx0p
D3	S	Rx0n	◀-----		B3	S	Tx0n
D4	L	GND	C	C	B4	L	GND
D5	S	Rx2p	◀-----		B5	S	Tx2p
D6	S	Rx2p	◀-----		B6	S	Tx2n
D7	L	GND	C	C	B7	L	GND
D8	S	Rx4p	◀-----		B8	S	Tx4p
D9	S	Rx4n	◀-----		B9	S	Tx4n
D10	L	GND	C	C	B10	L	GND
D11	S	Rx6p	◀-----		B11	S	Tx6p
D12	S	Rx6n	◀-----		B12	S	Tx6n
D13	L	GND	C	C	B13	L	GND
D14	S	Rx8p	◀-----		B14	S	Tx8p
D15	S	Rx8n	◀-----		B15	S	Tx8n
D16	L	GND	C	C	B16	L	GND
D17	S	Rx10p	◀-----		B17	S	Tx10p
D18	S	Rx10n	◀-----		B18	S	Tx10n
D19	L	GND	C	C	B19	L	GND
D20	S	VCC3.3-Rx	□	□	B20	M	VCC3.3-Tx
D21	S	VCC12-Rx	□	□	B21	M	VCC12-Tx

PIN OUT CHART (WIRING) SEE NOTE 6

spec ref -		dr Ingram, Debora		2011/04/16		projection  MM 	size A2	scale 1:2	
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng Alex Xu	2016/11/18		ecn no ELX-N-25380-1				
		chr -	-	rel level Released					
		appr Michael Zhou	2019/04/18		product family -				
surface  ASME Y14.5	linear	0.X	±Y	Amphenol FCI FINAL ASSEMBLY - STANDARD CXP PASSIVE CABLE ASSEMBLY	dwg no 10116951	rev D			
		0.XX	±Y						
	0.XXX	±Y	www.fci.com				cat. no. -	Product - Customer Drw	sheet 2 of 3
	angular 0°	±Y°							

NOTES:

1. MATERIAL:
COVERS: ZINC ALLOY
PULL STRAP: THERMOPLASTIC
LATCH: STAINLESS STEEL
FERRULE: BRASS
PIN: STAINLESS STEEL
(LOCTITE) EPOXY
SPLIT GROMMET: POLYURETHANE
PADDLE CARD: PRINTED CIRCUIT SUBSTRATE - FR4
CABLE JACKETS TO BE CL2 RATED - UL94-0
2. THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2002/95/EC)
3. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
4. UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE IS TO BE:
"DIM L" < 1 METER = ± 25mm
"DIM L" = 1 METER TO 5 METERS = ± 2% OF "DIM L"

5. CONTENTS OF LABEL ARE TO BE:
LABEL DETAILS:

FCI CHINA
FCI P/N
REVISION:D
SN: CNYWWCA ** * #####
|||||
(the first ** present cable length, eg:05--0.5m, 15--1.5m...)
(the 2nd * present cable wire guage, eg:2--30awg, 4--26awg...)
(the 3th * present L--lead free or H--halongen free .)
(the #### present serial number, eg: 0001, 0002...)
(barcode content is CNYWWCA ** * ##### in 128 code)

FONT SHALL BE CLEARLY VISIBLE AND BLACK IN COLOR.

6. ALL CABLE ASSEMBLIES SHALL BE 100% TESTED FOR CONTINUITY AS DEFINED IN WIRING LIST.
7. OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION: GS-12-0943.
8. PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING PER SPECIFICATION GS-14-920.
PACKAGE CABLE ASSEMBLIES PER GS-14-1272. DUST COVERS ARE TO BE PLACED ON ASSEMBLIES PRIOR TO PACKAGING.
9. IMPEDANCE: 100Ω DIFFERENTIAL.
10. A "△" SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION. THE CURRENT REVISION WILL BE SHOWN IN THE SYMBOL.



Product number (LEAD FREE)	"DIM L" LENGTH METERS	AWG	NOTES
10116951-2005LF	0.5	30	
10116951-2010LF	1.0	30	
10116951-2015LF	1.5	30	
10116951-2020LF	2.0	30	
10116951-2025LF	2.5	30	
10116951-2030LF	3.0	30	
10116951-4005LF	0.5	26	
10116951-4010LF	1.0	26	
10116951-4015LF	1.5	26	
10116951-4020LF	2.0	26	
10116951-4025LF	2.5	26	
10116951-4030LF	3.0	26	
10116951-4035LF	3.5	26	
10116951-4040LF	4.0	26	
10116951-4042LF	4.25	26	
10116951-4045LF	4.5	26	
10116951-4050LF	5.0	26	
10116951-4060LF	6.0	26	
10116951-4070LF	7.0	26	
10116951-4080LF	8.0	26	
10116951-4090LF	9.0	26	

Product number (HALOGEN FREE)	"DIM L" LENGTH METERS	AWG	NOTES
10116951-2005HLF	0.5	30	
10116951-2010HLF	1.0	30	
10116951-2015HLF	1.5	30	
10116951-2020HLF	2.0	30	
10116951-2025HLF	2.5	30	
10116951-2030HLF	3.0	30	
10116951-4005HLF	0.5	26	
10116951-4010HLF	1.0	26	
10116951-4015HLF	1.5	26	
10116951-4020HLF	2.0	26	
10116951-4025HLF	2.5	26	
10116951-4030HLF	3.0	26	
10116951-4035HLF	3.5	26	
10116951-4040HLF	4.0	26	
10116951-4042HLF	4.25	26	
10116951-4045HLF	4.5	26	
10116951-4050HLF	5.0	26	

Performance Level	Unequalized cable length/AWG*					
	1M	2M	2.5M	3M	4M	4.25M
Infiniband-QDR	30AWG	30AWG	30AWG	26AWG	26AWG	26AWG
IEEE 802.3ba	30AWG	30AWG	30AWG	TBD	TBD	

*MINIMUM RECOMENDED CABLE AWG IS SHOWN

spec ref -		dr Ingram, Debora		2011/04/16				size A2	scale 1:2
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng Alex Xu	2016/11/18		ecn no ELX-N-25380-1				
-		chr -	-						
-		appr Michael Zhou	2019/04/18		product family -			rel level Released	
surface	linear	0.X	±Y	Amphenol FCI	title FINAL ASSEMBLY - STANDARD	dwg no 10116951	rev D		
		0.XX	±Y						
ASME Y14.5		0.XXX	±Y						
	angular	0°	±Y°	www.fci.com	cat. no. -	Product - Customer Drw		sheet 3 of 3	