

Layout Form


200A Middle DRAWER
Pin housing P/N: 235-0164-01100

PIN ASSEMBLY

1. Enter company and contact information (at right).
2. Enter the quantity of each pin contact you require in the **Qty** column of the **Pin Contact Selection Menu** table.
3. **For the contacts you want Elcon to install**, enter the letter reference of the desired pin contact in the appropriate contact position on the drawing; e.g., if you need a size #8 solder cup standard contact to be installed in contact position #19, write "E" in circle #19.
4. Sign, date and fax the completed form to Elcon at the appropriate fax number for your location (see the bottom of the page).

Enter customer information here		
Company	Location	
Contact Name	Title	
Telephone ()	Fax ()	
Signature	EMail Address	
	Quantity Required	Date

Pin housing (rear face)

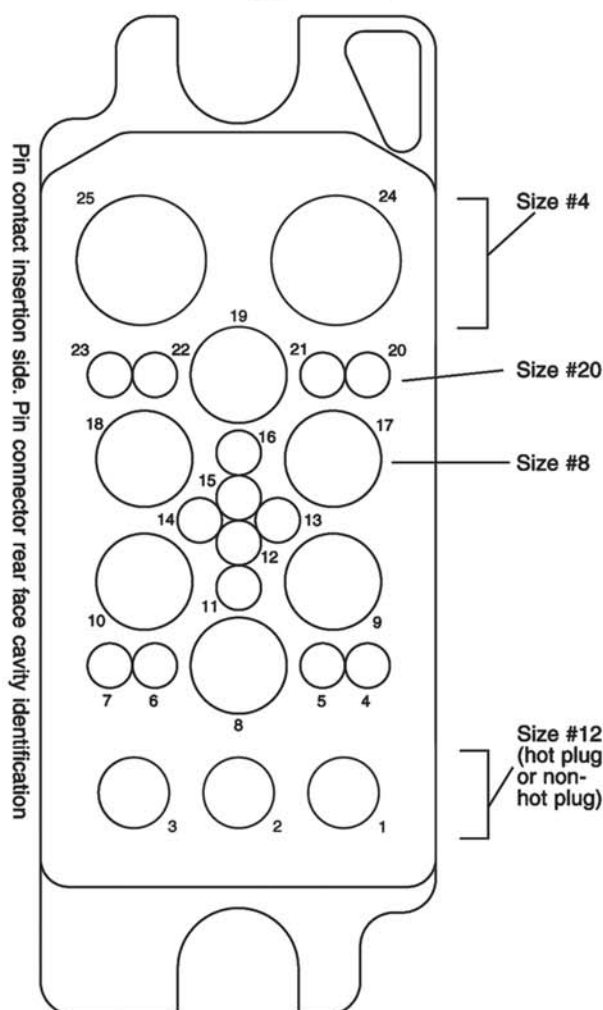

Pin Contact Selection Menu				
Size	Ref	Part Number	Termination, Pin Length	Qty
#4	A =	711-52-02107	Crimp, standard	
	B =	711-55-02107	External thread, standard	
#8	C =	701-11-02107	Crimp, standard	
	D =	701-17-02107	Crimp, premate	
	E =	707-19-02107	Solder cup, standard	
	F =	709-74-02107	Solder cup, premate	
#12	G =	701-12-02107	Crimp, standard	
	H =	701-15-02107	Crimp, premate	
	I =	701-16-02107	Crimp, postmate	
	J =	707-14-02107	Solder cup, standard	
	K =	707-44-02107	Solder cup, premate	
	L =	707-45-02107	Solder cup, postmate	
#12 Hot Plug	M =	701-12-02109	Crimp, standard, hot plug	
	N =	701-15-02109	Crimp, premate, hot plug	
	O =	707-14-02109	Solder cup, standard, hot plug	
	P =	707-44-02109	Solder cup, premate, hot plug	
#20	Q =	701-14-02109	Crimp, standard	
	R =	701-64-02109	Crimp, premate	
	S =	701-65-02109	Crimp, postmate	
	T =	707-01-02109	Solder cup, standard	
	U =	707-38-02109	Solder cup, premate	
	V =	707-05-02109	Solder cup, postmate	
Float Mount Shoulder Screw				
Part Number	Description			Qty
902-83-02113	Screw No. 8-32 UNC 2A			
903-19-02113	Screw M4 x 0.7			

Top assembly part No.
(TO BE ASSIGNED BY ELCON)

Layout Form


200A Middle DRAWER
Socket housing P/N: 235-0165-01100

SOCKET ASSEMBLY

1. Enter company and contact information (at right).
2. Enter the quantity of each socket contact you require in the **Qty** column of the **Socket Contact Selection Menu** table.
3. **For the contacts you want Elcon to install**, enter the letter reference of the desired socket contact in the appropriate contact position on the drawing; e.g., if you need a size #8 solder cup contact to be installed in contact position #19, write "D" in circle #19.
4. Sign, date and fax the completed form to Elcon at the appropriate fax number for your location (see the bottom of the page).

Enter customer information here		
Company	Location	
Contact Name	Title	
Telephone ()	Fax ()	
Signature	EMail Address	
	Quantity Required	Date

Socket housing (rear face)

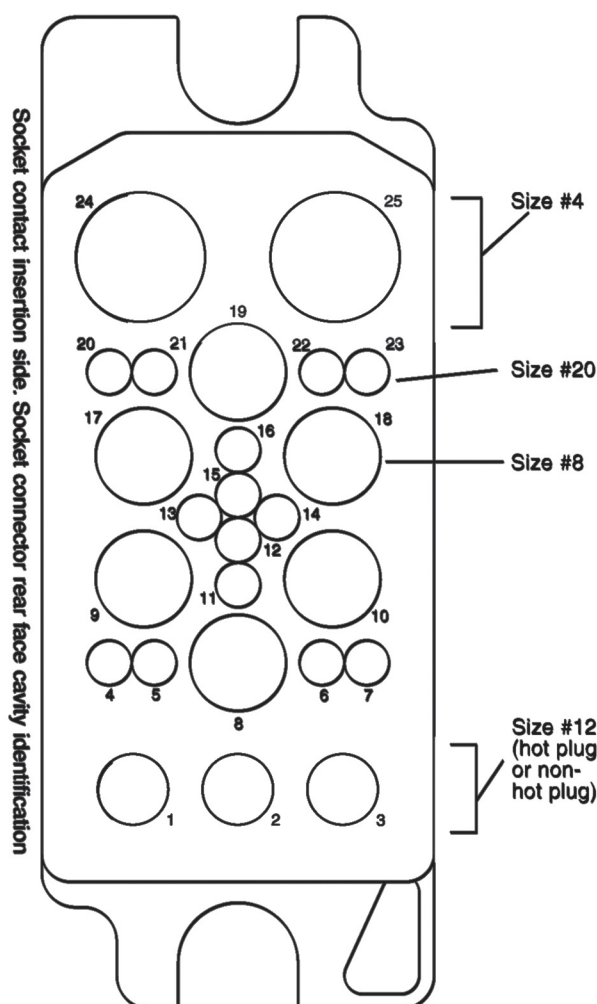

Socket Contact Selection Menu				
Size	Ref	Part Number	Termination	Qty
#4	A =	712-81-01107	Crimp	
	B =	712-85-01107	External thread	
#8	C =	702-31-01107	Crimp	
	D =	708-27-01107	Solder cup	
#12	E =	702-32-01107	Crimp	
	F =	708-21-01107	Solder cup	
#12 Hot Plug	G =	708-73-01109	Crimp, hot plug	
	H =	708-76-01109	Solder cup, hot plug	
#20	I =	702-92-01109	Crimp	
	J =	708-66-01109	Solder cup	

Float Mount Shoulder Screw		
Part Number	Description	Qty
902-83-02113	Screw No. 8-32 UNC 2A	
903-19-02113	Screw M4 × 0.7	

Top assembly part No.
 (TO BE ASSIGNED BY ELCON)