


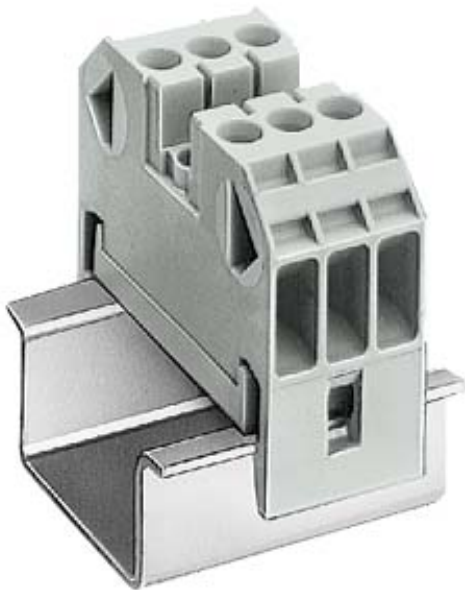

THROUGH-TYPE TERMINAL THERMOPL. SCREW
TERMINAL ON BOTH ENDS TERMINAL BLOCK 3-POLE,
BEIGE 19.5MM, SZ. 4

Similar to image

Technical data:		
Operating current / Rated value	A	32
Operating voltage / Rated value	V	800
Mounting type		DIN rail 35 mm
Combustibility class acc. to UL 94		V2
Material / of the insulating body		Thermoplast
Design of the electrical connection		
• 1		screw-type terminal
• 2		screw-type terminal
Design tested acc. to type of protection / EEx e		No
Product component / required / connection plate		No
Number of terminal levels		1
Number of terminal points / per terminal level		2
Design of terminal / Terminal levels internally linked		No
Terminal contact spacing	mm	19.5
Position / of the terminal		lateral
Height / with lowest-profile installation	mm	26
Color		beige
Length	mm	41

Ambient temperature • during operation	°C	-25 ... +55
Connectable conductor cross-section • solid • stranded • finely stranded • without core end processing • with core end processing	mm ²	4 ... 4
	mm ²	4 ... 4
	mm ²	4 ... 4
	mm ²	4 ... 4

Certificates/approvals:

General Product Approval



CSA

GOST

UL

EG-Konf.

Shipping Approval

other



GL

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1011-3DG21>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1011-3DG21/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-3DG21

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Oct 20, 2014