

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

## Product description

Connector element right, left housing with engagement pin, right closed with cover

## Your advantages

- The screw plugs can be combined with COMBI terminal blocks with all forms of connection technology and are available in two versions
- Can be bridged with FBS ... standard bridges
- The COMBI plugs for self-assembly provide solutions that users can implement themselves
- The plugs are assembled directly on site by snapping together 1-position plug elements
- The connected conductors can be led directly into the cable duct to save space

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 3045392             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | BE01                |
| Product key                          | BE1144              |
| Catalog page                         | Page 307 (C-1-2019) |
| GTIN                                 | 4046356055604       |
| Weight per piece (including packing) | 5.746 g             |
| Weight per piece (excluding packing) | 5.195 g             |
| Customs tariff number                | 85366990            |
| Country of origin                    | TR                  |

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## Technical data

### Product properties

|                     |               |
|---------------------|---------------|
| Product type        | Terminal plug |
| Number of positions | 1             |
| Pitch               | 5.2 mm        |
| Potentials          | 1             |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                     |      |
|---------------------|------|
| Rated surge voltage | 6 kV |
|---------------------|------|

### Connection data

|                                                                                           |                                                       |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Nominal cross section                                                                     | 2.5 mm <sup>2</sup>                                   |
| Screw thread                                                                              | M3                                                    |
| Tightening torque                                                                         | 0.5 ... 0.6 Nm                                        |
| Stripping length                                                                          | 9 mm                                                  |
| Internal cylindrical gage                                                                 | A3                                                    |
| Connection in acc. with standard                                                          | IEC 61984                                             |
| Conductor cross section rigid                                                             | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| Cross section AWG                                                                         | 26 ... 12 (converted acc. to IEC)                     |
| Conductor cross section flexible                                                          | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| Conductor cross section, flexible [AWG]                                                   | 26 ... 12 (converted acc. to IEC)                     |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| 2 conductors with same cross section, solid                                               | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>          |
| 2 conductors with same cross section, flexible                                            | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>          |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>          |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>             |
| Nominal current                                                                           | 24 A                                                  |
| Maximum load current                                                                      | 24 A (with 4 mm <sup>2</sup> conductor cross section) |
| Nominal voltage                                                                           | 500 V                                                 |
| Nominal cross section                                                                     | 2.5 mm <sup>2</sup>                                   |

### Dimensions

|        |         |
|--------|---------|
| Width  | 5.2 mm  |
| Height | 20.5 mm |
| Depth  | 47 mm   |
| Length | 20.5 mm |
| Pitch  | 5.2 mm  |

# UPBV 2,5/ 1-R GNYE - Plug



3045392

<https://www.phoenixcontact.com/us/products/3045392>

## Material specifications

|                                                                         |              |
|-------------------------------------------------------------------------|--------------|
| Color                                                                   | green-yellow |
| Flammability rating according to UL 94                                  | V0           |
| Insulating material group                                               | I            |
| Insulating material                                                     | PA           |
| Static insulating material application in cold                          | -60 °C       |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C       |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C       |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3  |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg     |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed       |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed       |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed       |

## Environmental and real-life conditions

### Ambient conditions

|                                          |                                                                          |
|------------------------------------------|--------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C (max. operating temperature see derating curve)                   |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                          |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                          |
| Permissible humidity (operation)         | 20 % ... 90 %                                                            |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                            |

## Standards and regulations

|                                  |           |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
|----------------------------------|-----------|

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## Drawings

Circuit diagram




# UPBV 2,5/ 1-R GNYE - Plug

3045392


<https://www.phoenixcontact.com/us/products/3045392>



Schematic diagram

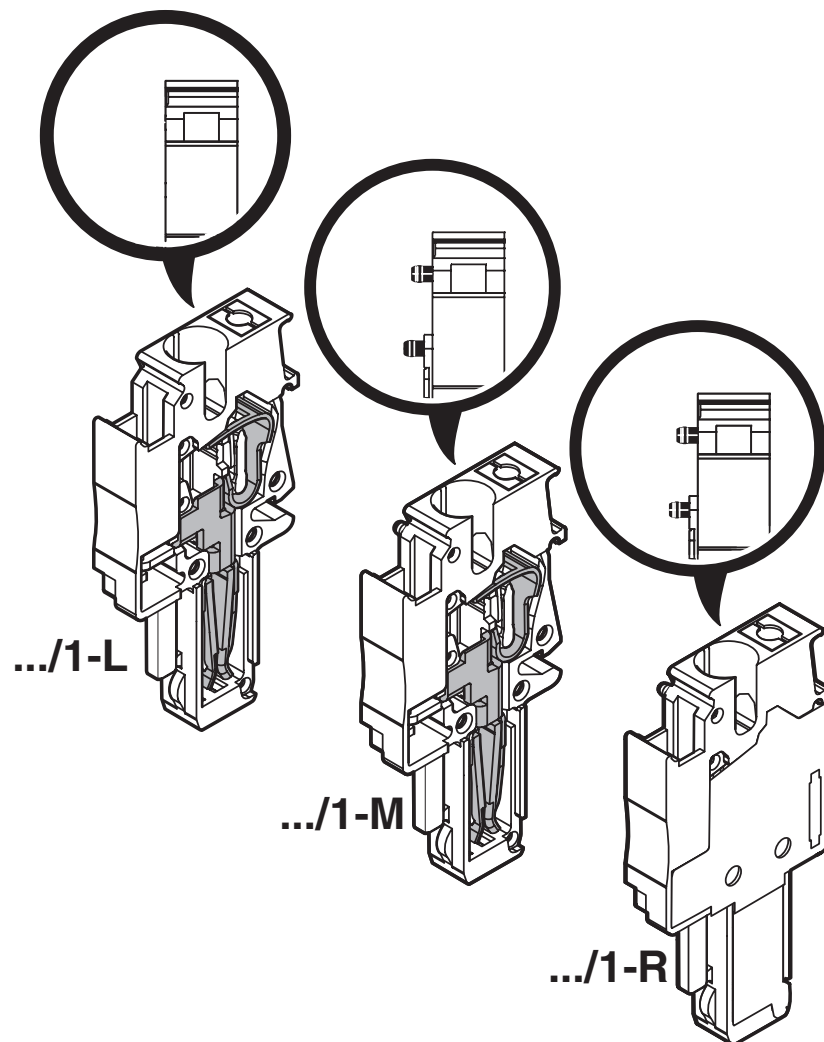

Diagram

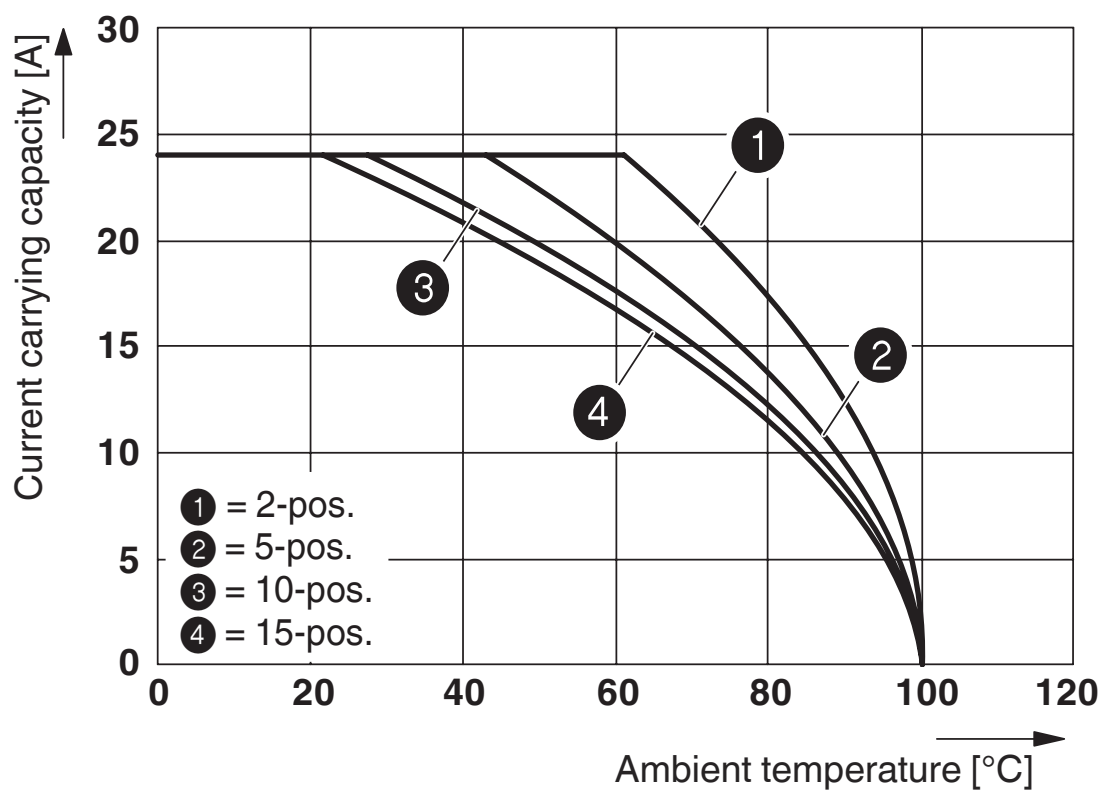

The figure shows the derating curve of the UT 2,5/1P... terminal block in connection with the UPBV 2,5 plug

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3045392>

**EAC**

Approval ID: RU C-DE.BL08.B.00511

| <div><b>cULus Recognized</b><br/>Approval ID: E60425</div> |                       |                       |                   |                             |
|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                             | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                                 |                       |                       |                   |                             |
|                                                                                                                                             | 600 V                 | 20 A                  | 26 - 12           | -                           |
| Multi-conductor connection                                                                                                                  | 600 V                 | 20 A                  | 26 - 16           | -                           |
| Use group C                                                                                                                                 |                       |                       |                   |                             |
|                                                                                                                                             | 600 V                 | 20 A                  | 26 - 12           | -                           |
| Multi-conductor connection                                                                                                                  | 600 V                 | 20 A                  | 26 - 16           | -                           |
| Use group D                                                                                                                                 |                       |                       |                   |                             |
|                                                                                                                                             | 600 V                 | 5 A                   | 26 - 12           | -                           |
| Multi-conductor connection                                                                                                                  | 600 V                 | 5 A                   | 26 - 16           | -                           |

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141151 |
| ECLASS-12.0 | 27141151 |
| ECLASS-13.0 | 27250306 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002021 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 6(c)                                                                                                                                                                                                                              |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## Accessories

**i** Note: Applying some accessories below might limit this product.

### FBS 2-5 - Plug-in bridge

3030161

<https://www.phoenixcontact.com/us/products/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red

**i** Max. current carrying capacity: 24 A

---

### FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/us/products/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red

**i** Max. current carrying capacity: 24 A

---

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBS 4-5 - Plug-in bridge

3030187

<https://www.phoenixcontact.com/us/products/3030187>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

---

## FBS 5-5 - Plug-in bridge

3030190

<https://www.phoenixcontact.com/us/products/3030190>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

---

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBS 10-5 - Plug-in bridge

3030213

<https://www.phoenixcontact.com/us/products/3030213>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

---

## FBS 20-5 - Plug-in bridge

3030226

<https://www.phoenixcontact.com/us/products/3030226>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 24 A

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBS 50-5 - Plug-in bridge

3038930

<https://www.phoenixcontact.com/us/products/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 2-5 - Plug-in bridge

3033702

<https://www.phoenixcontact.com/us/products/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 17.5 A

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBSR 3-5 - Plug-in bridge

3001591

<https://www.phoenixcontact.com/us/products/3001591>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 17.5 A

---

## FBSR 4-5 - Plug-in bridge

3001592

<https://www.phoenixcontact.com/us/products/3001592>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBSR 5-5 - Plug-in bridge

3001593

<https://www.phoenixcontact.com/us/products/3001593>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 17.5 A

---

## FBSR 10-5 - Plug-in bridge

3033710

<https://www.phoenixcontact.com/us/products/3033710>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 17.5 A

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBS 2-5 BU - Plug-in bridge

3036877

<https://www.phoenixcontact.com/us/products/3036877>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 24 A

---

## FBS 3-5 BU - Plug-in bridge

3036880

<https://www.phoenixcontact.com/us/products/3036880>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 24 A

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/us/products/3036893>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 24 A

---

## FBS 5-5 BU - Plug-in bridge

3036903

<https://www.phoenixcontact.com/us/products/3036903>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 24 A

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBS 10-5 BU - Plug-in bridge

3036916

<https://www.phoenixcontact.com/us/products/3036916>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 24 A

---

## FBS 20-5 BU - Plug-in bridge

3036929

<https://www.phoenixcontact.com/us/products/3036929>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 24 A

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## FBS 50-5 BU - Plug-in bridge

3032114

<https://www.phoenixcontact.com/us/products/3032114>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 24 A

---

## UPRZ - Latching

3045570

<https://www.phoenixcontact.com/us/products/3045570>



Latching, width: 10 mm, height: 39.8 mm, number of positions: 2, color: orange

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## UPR/ 2 - Latching

3045567

<https://www.phoenixcontact.com/us/products/3045567>



Latching, width: 10 mm, height: 39.8 mm, number of positions: 2, color: orange

---

## UPZ/ 2 - Strain relief

3045554

<https://www.phoenixcontact.com/us/products/3045554>



Strain relief, width: 9.3 mm, height: 36.7 mm, number of positions: 2, color: black

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## DF-UPBV 2,5/ 4 - Flange cover

3060432

<https://www.phoenixcontact.com/us/products/3060432>



Flange cover, can be snapped onto the UPBV 2,5/... and UPBV 4/... plugs, connection method: Screw connection, depth: 32 mm, width: 4.5 mm, height: 45.7 mm, color: gray

---

## UPBV 2,5/ 1-L - Plug

3045318

<https://www.phoenixcontact.com/us/products/3045318>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## UPBV 2,5/ 1-L BU - Plug

3045321

<https://www.phoenixcontact.com/us/products/3045321>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## UPBV 2,5/ 1-L GNYE - Plug

3045334

<https://www.phoenixcontact.com/us/products/3045334>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## UPBV 2,5/ 1-M - Plug

3045347

<https://www.phoenixcontact.com/us/products/3045347>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## UPBV 2,5/ 1-M BU - Plug

3045350

<https://www.phoenixcontact.com/us/products/3045350>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## UPBV 2,5/ 1-M GNYE - Plug

3045363

<https://www.phoenixcontact.com/us/products/3045363>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## LPO 2,5/E - Pick-off plug

3270516

<https://www.phoenixcontact.com/us/products/3270516>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



### LPO 2,5 - Pick-off plug

3270517

<https://www.phoenixcontact.com/us/products/3270517>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

### LPS-5/E - Service connector

3270520

<https://www.phoenixcontact.com/us/products/3270520>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## LPS-5 - Service connector

3270521

<https://www.phoenixcontact.com/us/products/3270521>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

---

## MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



### MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



---

### MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>




## MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



---

## MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



---

## MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



---

## PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/us/products/3032871>

4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch



## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## PS-5 - Test plug

3030983

<https://www.phoenixcontact.com/us/products/3030983>

Test plug, Modular test plug, number of positions: 1, color: red



---

## DP PS-5 - Spacer plate

3036725

<https://www.phoenixcontact.com/us/products/3036725>

Spacer plate, depth: 29 mm, width: 5.2 mm, height: 22.4 mm, number of positions: 1, color: red



## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## PS-5/2,3MM RD - Test plug

3038723

<https://www.phoenixcontact.com/us/products/3038723>



Test plug, number of positions: 1, color: red

---

## ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

<https://www.phoenixcontact.com/us/products/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## ZBF 5 CUS - Zack Marker strip, flat

0825025

<https://www.phoenixcontact.com/us/products/0825025>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

<https://www.phoenixcontact.com/us/products/0808671>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

<https://www.phoenixcontact.com/us/products/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

<https://www.phoenixcontact.com/us/products/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

<https://www.phoenixcontact.com/us/products/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## UC-TMF 5 - Marker for terminal blocks

0818153

<https://www.phoenixcontact.com/us/products/0818153>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## UC-TMF 5 CUS - Marker for terminal blocks

0824638

<https://www.phoenixcontact.com/us/products/0824638>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

---

## UCT-TMF 5 - Marker for terminal blocks

0828744

<https://www.phoenixcontact.com/us/products/0828744>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## UCT-TMF 5 CUS - Marker for terminal blocks

0829658

<https://www.phoenixcontact.com/us/products/0829658>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

---

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

## UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)