


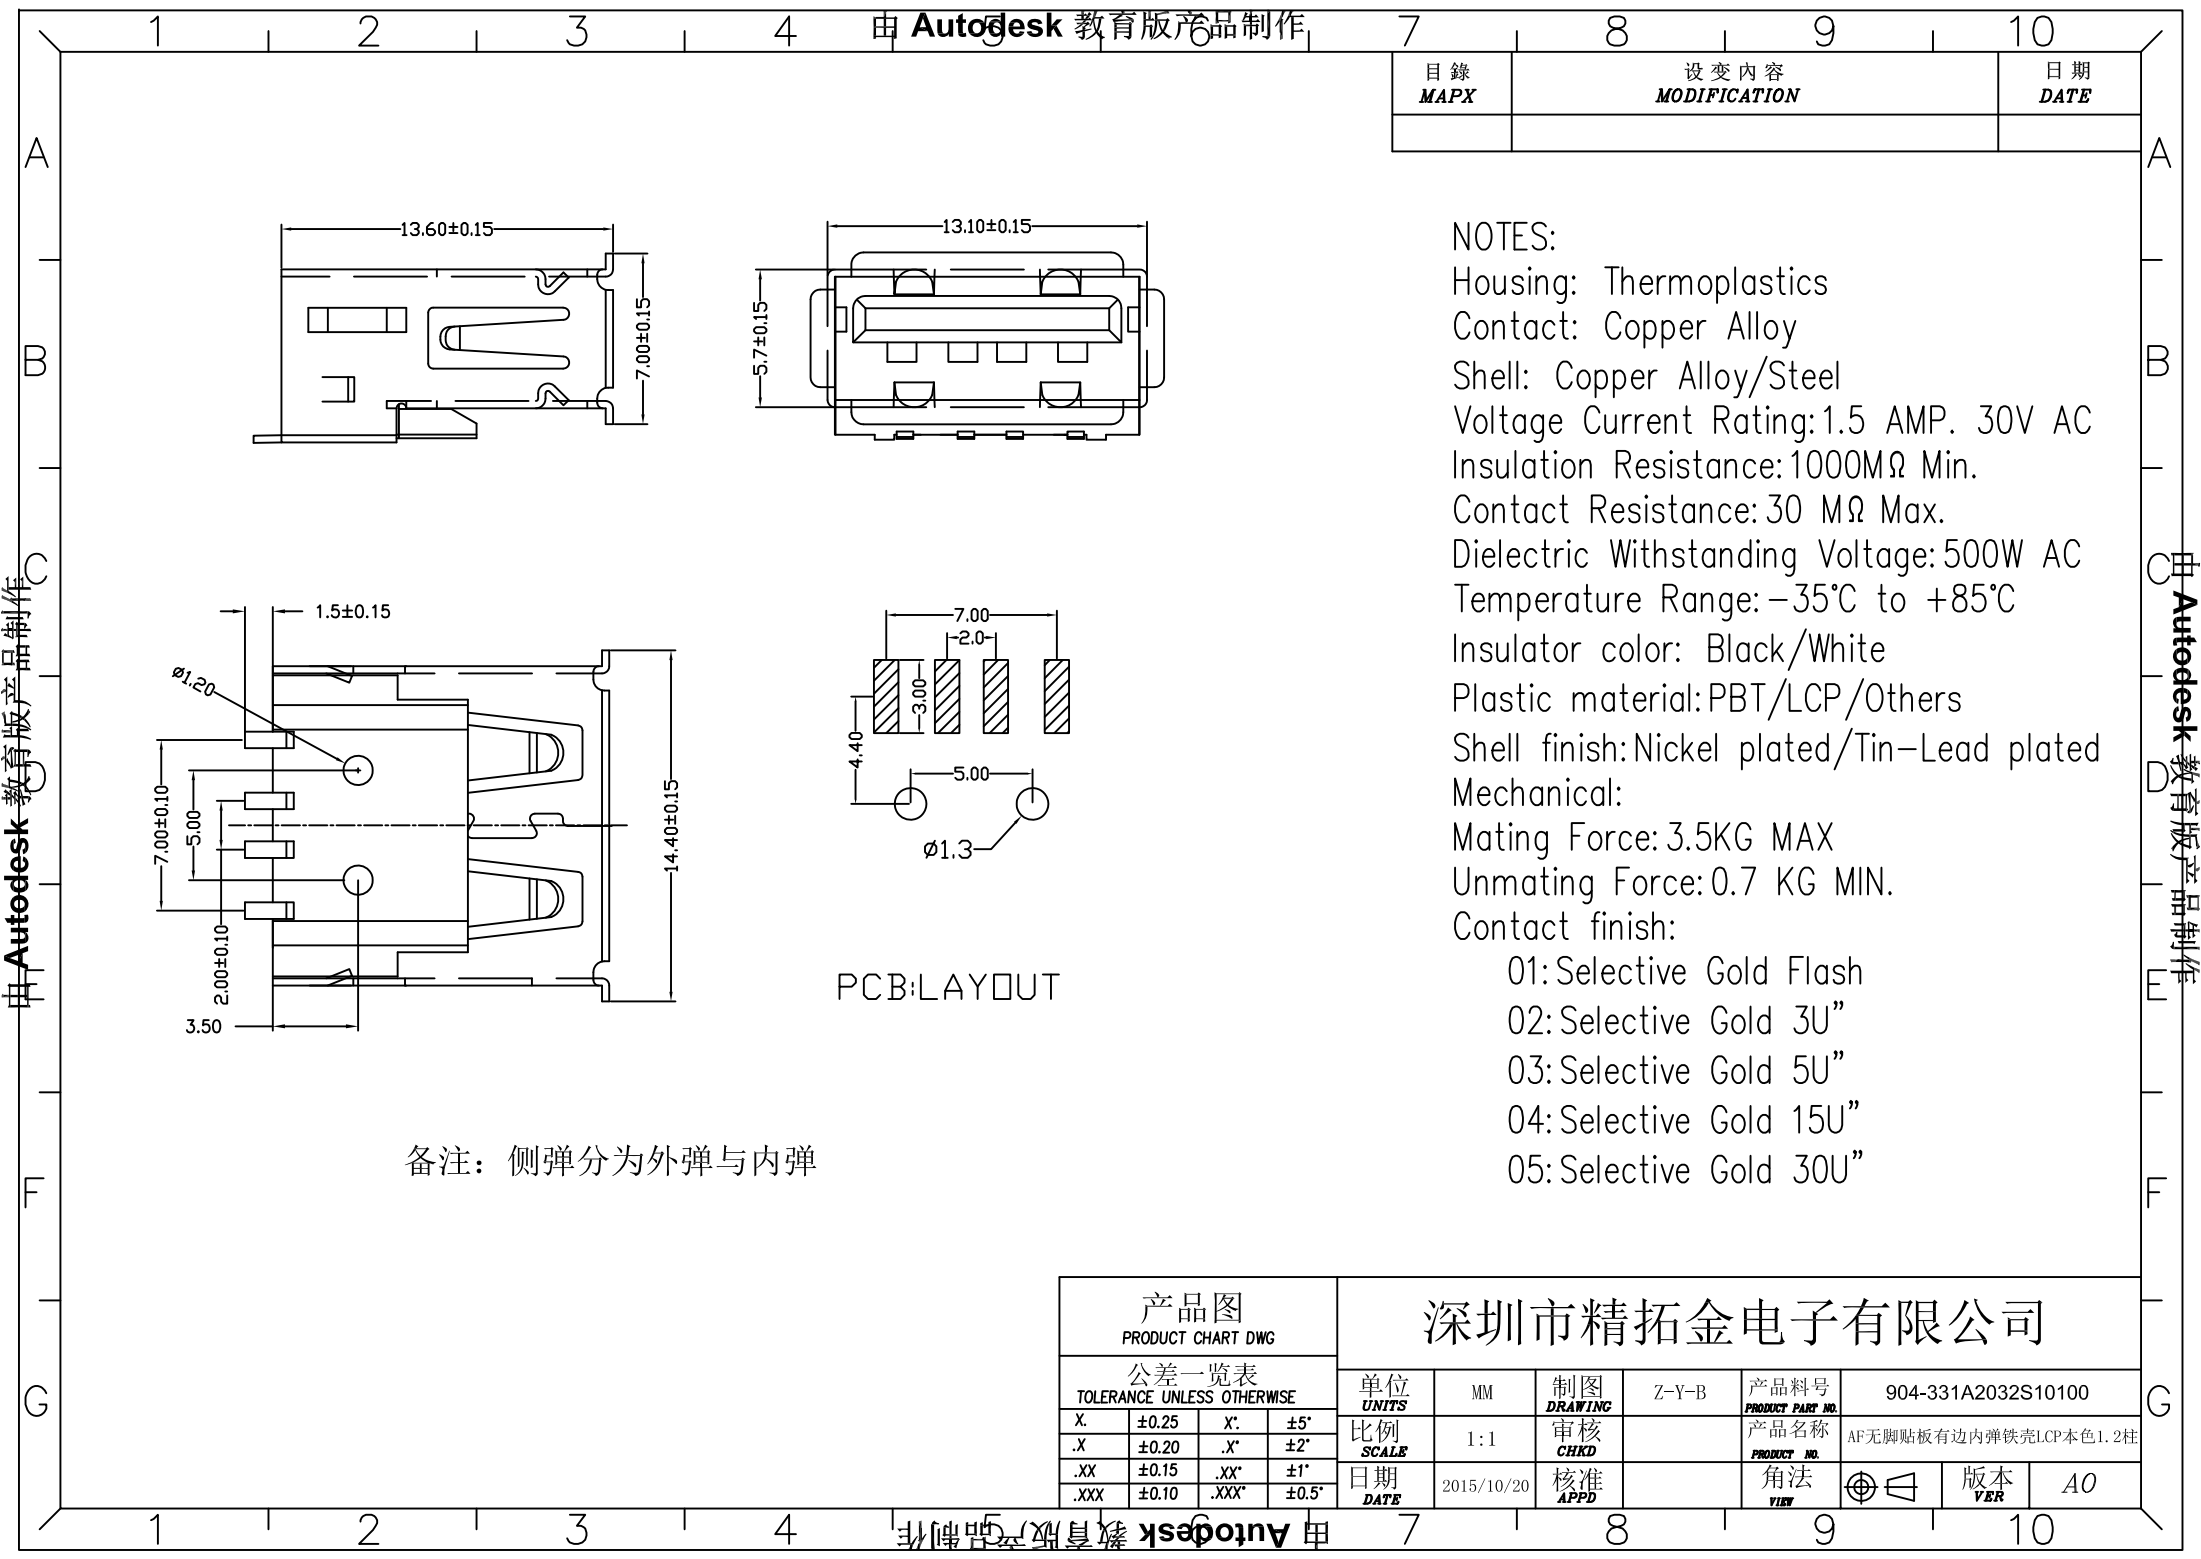

由Autodesk教育版产品制作

由Autodesk教育版产品制作

| 目錄<br>MAPX | 设变内容<br>MODIFICATION | 日期<br>DATE |
|------------|----------------------|------------|
|            |                      |            |

NOTES:

Housing: Thermoplastics

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:−35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin–Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U”

03:Selective Gold 5U”

04:Selective Gold 15U”

05:Selective Gold 30U”

PCB:LAYOUT

备注：侧弹分为外弹与内弹

| 产品图<br>PRODUCT CHART DWG            |       |        |       | 深圳市精拓金电子有限公司 |            |               |       |                          |                       |
|-------------------------------------|-------|--------|-------|--------------|------------|---------------|-------|--------------------------|-----------------------|
| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       |        |       | 单位<br>UNITS  | MM         | 制图<br>DRAWING | Z-Y-B | 产品料号<br>PRODUCT PART NO. | 904-331A2032S10100    |
| X.                                  | ±0.25 | X'.    | ±5°   | 比例<br>SCALE  | 1:1        | 审核<br>CHKD    |       | 产品名称<br>PRODUCT NO.      | AF无脚贴板有边内弹铁壳LCP本色1.2柱 |
| .X                                  | ±0.20 | .X'.   | ±2°   |              |            |               |       |                          |                       |
| .XX                                 | ±0.15 | .XX'.  | ±1°   | 日期<br>DATE   | 2015/10/20 | 核准<br>APPD    |       | 角法<br>VIEW               | 版本<br>VER             |
| .XXX                                | ±0.10 | .XXX'. | ±0.5° |              |            |               |       |                          | A0                    |