
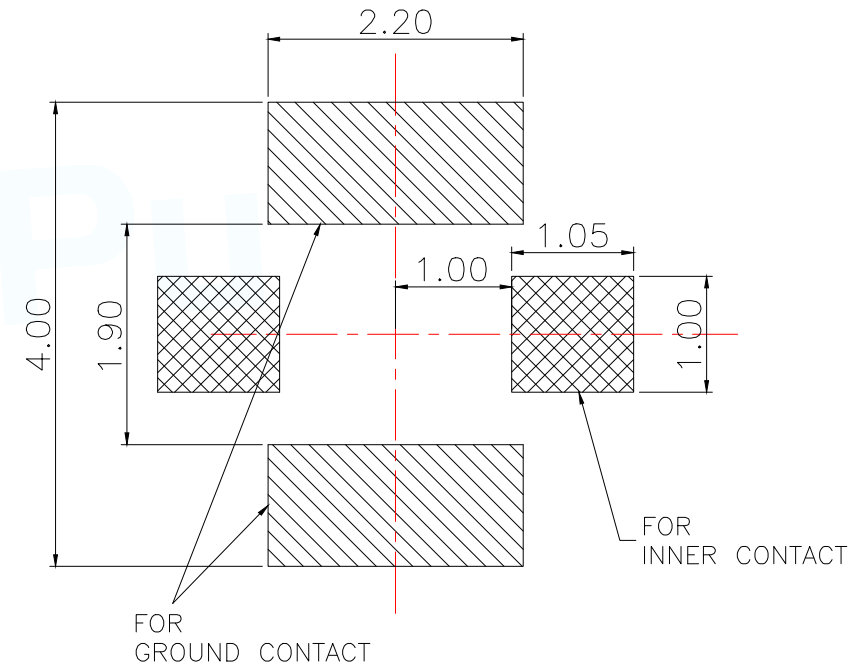
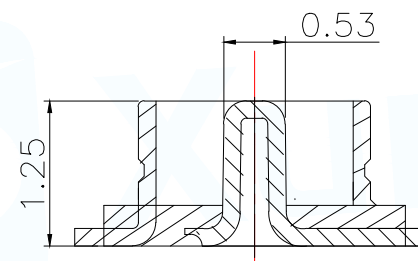
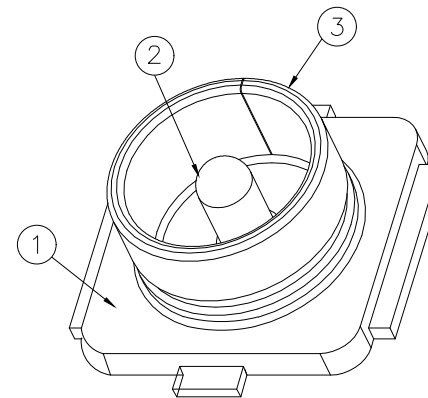


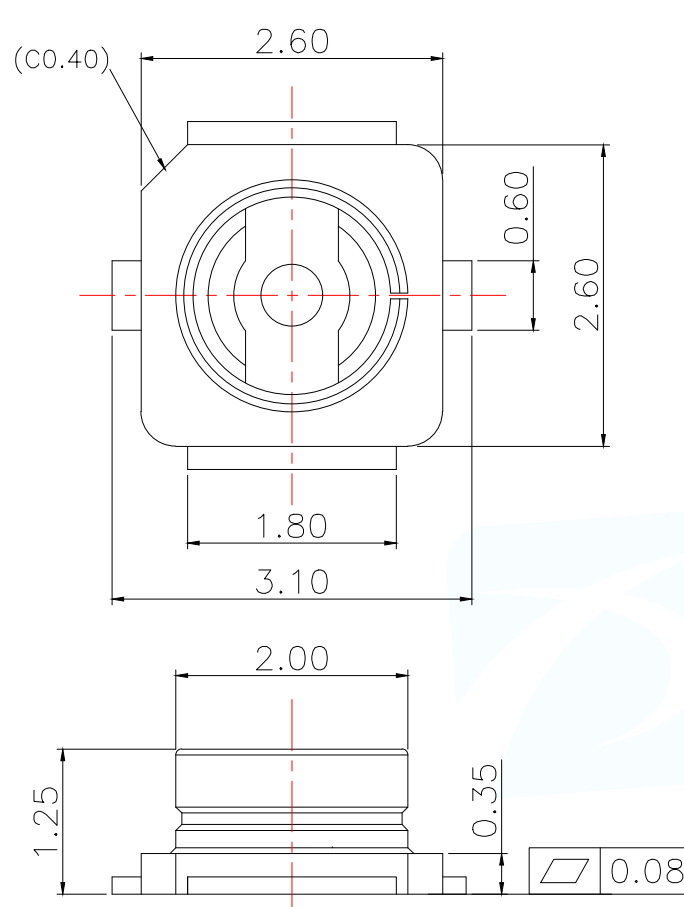


NOTE:1

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 0.5A MAX.
 - IMPEDANCE: 50 OHM NOMINAL.
- MECHANICAL CHARACTERISTICS:
 - OPERATING TEMP. $-40^{\circ}\sim 90^{\circ}$
 - VIEW UP TO 3GHz: 1.3 MAX.
3GHz TO 6GHz: 1.4 MAX.
 - DURABILITY: 30 CYCLES

NOTE:2

- HOUSING MATERIAL: LCP, NATURE, UL94V-0.
- TERMINAL MATERIAL: COPPER ALLOY (C2680),
- SHELL MATERIAL: COPPER ALLOY (C5191),

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

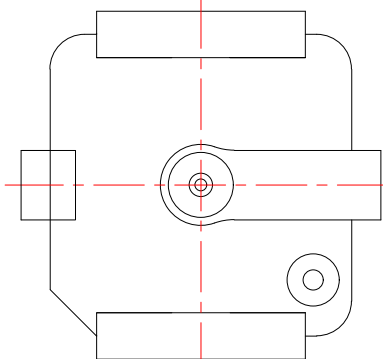

3	GROUND CONTACT	1	COPPER ALLOY	Au PLATING OVER NI OVER ALL	
2	INNER CONTACT	1	COPPER ALLOY	Au PLATING OVER NI OVER ALL	
1	HOUSING	1	LCP UL94V-0		
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:RF BOARD END CONNECTOR,FIRST GENERATION		
			PAR	IPEX-001	
			DWN	Lucas	
			CHKD	Ethan	
DECIMALS:	ANGLES:		APVD	Jacob	
.X:±0.25	.X':±5°		SCALE1:1	UNIT:MM	
.XX:±0.25	.XX':±3°		SIZE:A4	SHEET:1F1	REV:A
	.XXX':±1°		CUSTOMER COPY		