



Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: **Wire-to-Board**

Number of Positions: **3**

Number of Rows: **1**

Centerline (Pitch): **5 mm [.197 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Columns	3
Number of Positions	3
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------



Contact Features

PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Layout	Inline
Mating Tab Width	6.3 mm[.248 in]
Mating Tab Thickness	.8 mm[.032 in]
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	2 µm[78.74 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Rectangular
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	16 A

Termination Features

Square Termination Post & Tail Dimension	.8 mm[.032 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Guide Pin
Mating Alignment Type	Keyed, Polarization
Mating Retention	With
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without

Housing Features

Housing Material	Nylon
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Connector Length	17.3 mm[.68 in]
------------------	-----------------



Connector Height	12.8 mm[.503 in]
Connector Width	14.9 mm[.58 in]

Usage Conditions

Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	250
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

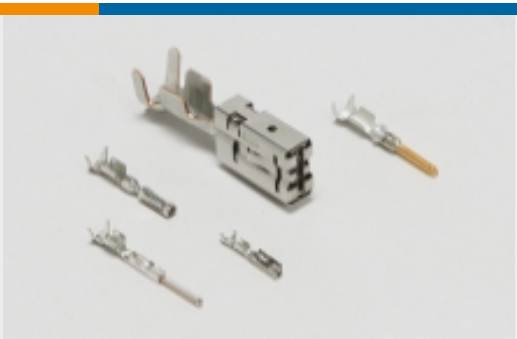
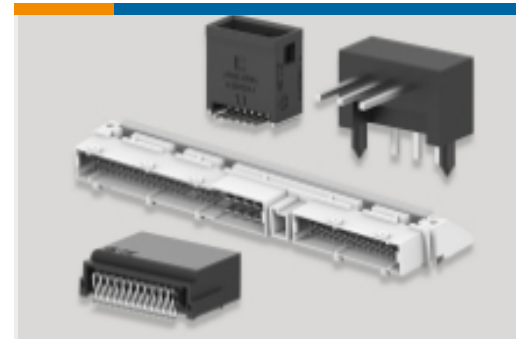


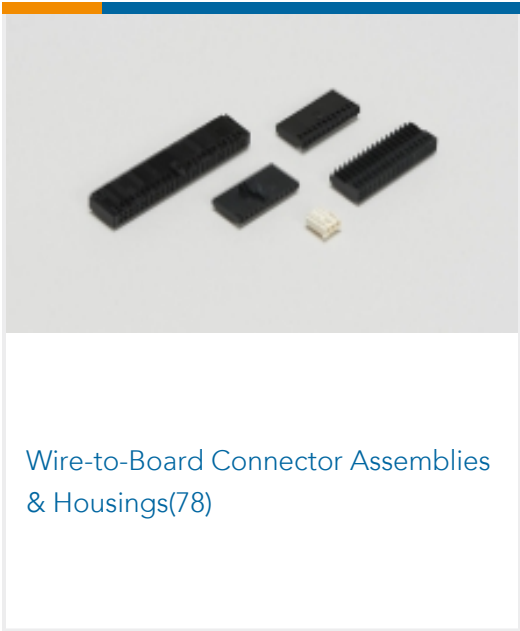
on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 2292457-3 3P, RAST 5 HEADER, PL, SHROUDED	 TE Part # 1-2232043-3 3P, RAST 5 Tab Header, THV	 TE Part # 2-2232043-3 3P, RAST 5 Tab Header, THV	 TE Part # 3-2232045-3 3P, RAST 5 TAB HEADER, THV
 TE Part # 4-2232043-3 3P, RAST 5 Tab Header, THV	 TE Part # 5-2232043-3 3P, RAST 5 Tab Header, THV	 TE Part # 6-2232043-3 3P, RAST 5 Tab Header, THV	 TE Part # 7-2232043-3 3P, RAST 5 Tab Header, THV
 TE Part # 8-2232043-3 3P, RAST 5 Tab Header, THV	 TE Part # 9-2232043-3 3P, RAST 5 Tab Header, THV		

Also in the Series | RAST 5D

 Automotive Terminals(5)	 Connector Contacts(10)	 Insertion & Extraction Tools(1)	 PCB Headers & Receptacles(69)
--	--	--	--



Customers Also Bought

TE Part #213974-1
METRIMATE 30P RCPT HOUSING

TE Part #770210-1
UMNL GRND PIN PTPBR

TE Part #1971845-4
4P, RAST 5 Tab Header, THV

TE Part #350699-1
UMNL SPLIT PIN PTPBR

TE Part #350851-1
UMNL SOK 24-18 PTPBR

TE Part #2-1971845-2
2P, RAST 5 Tab Header, THV

Documents

Product Drawings
3P, RAST 5 TAB HEADER, THV
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1-2232511-3_C.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_1-2232511-3_C.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1-2232511-3_C.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages

[RAST Connector System Catalog](#)

English

[Standard Power Timer Connector with TPA](#)

English

Product Specifications

[Product Specification](#)

English