

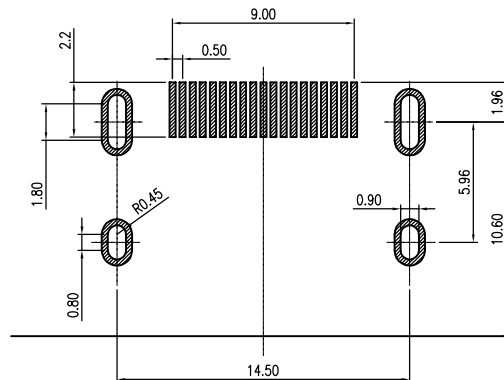
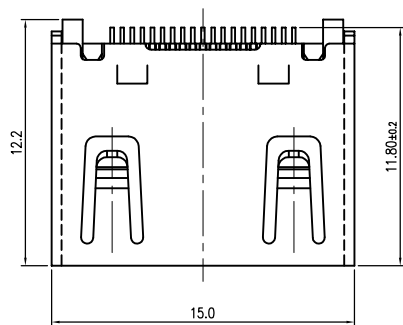

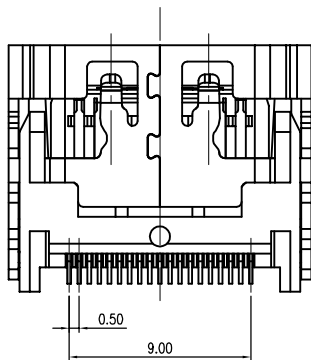




PCB LAYOUT(TOP VIEW)

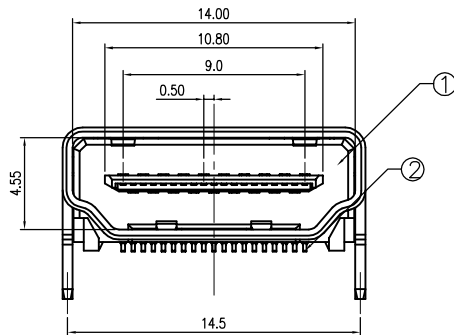

NOTES:

1.) MATERIAL:

1-1. HOUSING:LCP,UL 94V-0,COLOR:BLACK;

1-2. CONTACT:C2680R-EH T=0.20;

1-3. SHELL:C2680 T=0.50;

2-1. CONTACT: Au PLATING ON CONTACT AREA,(SEE P/N DESCRIBING) MATTE PURE Au 1u" Min. PLATING ON SOLDER TAILS,50u" MIN. Ni UNDERPLATING OVERALL;

2-2. SHELL: PLATING Ni

3.) SPECIFICATIONS:

3-1. VOLTAGE RATING: 40V

3-2. CURRENT RATING: 0.5A

3-3. INSULATION RESISTANCE: 100MΩ MIN

3-4. CONTACT RESISTANCE: 30mΩ MAX Ω

3-5. OPERATION TEMPERATURE: -20° TO +85°

3-6. INSERT FORCE:4.0kgf MAX

3-7. EXTRACT FORCE:1.0kgf~4.0kgf

3-8. DURABILITY: 10000 CYCLES

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)	单位 (UNIT): MM
		版本 (REV)	比例 (SCALE) 1:1
		日期 (DATE)	
品名 (ITEM NO)	HDMI 19P SMT型 四脚	设计 (DESIGN)	未注公差
料号 (PART NO)	HDMI-AF-WT-01	审核 (CHECKED)	TOLERANCE UNSPECIFIED
模号 (MODEL NO)		核准 (APPROVED)	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X" ±5° X.X" ±2°