


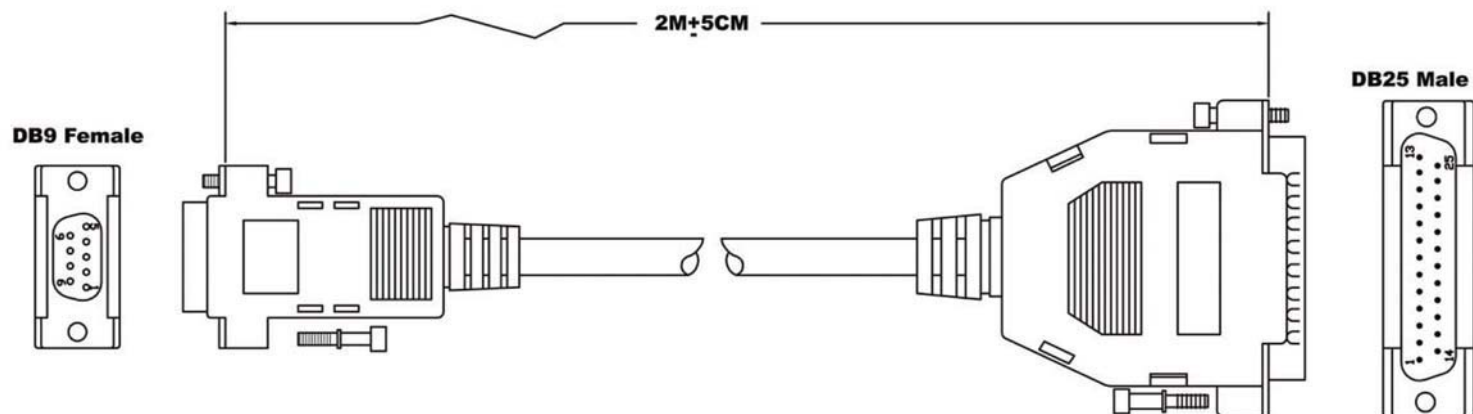

Configuration:

DB9F

DB25M

1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22

Shield _____ Shield

Material:

- 1.Cable: #28 9C+1+AL/MY (Beige PVC Jacket) O.D:6.0MM
- 2.Both connectors with normal type
- 3.Screw(Metal): #4-40UNC Type
- 4.Assembly(Speed Hood) Type

Notes:

- 1.Total Length: 2M±5CM
2.Color: Beige
3.Assembly Type

Scale	1:1							Name
TOLERANCE						Drawn	11.14.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

RoHS Complaint

Item No.	AK125-2-R (2.0 M) AK128-.25-R (0.25M)
----------	--

Title	Null Modern Cable (AT), D-Sub 9 Pin Female to D-Sub 25 Pin Male
--------------	--

Drawing No.	
-------------	--

	rev00
Replace	Sheet