




Quartz Crystal


HC-49/U3H (low profile)

part no.	12.84395
model	KX - 3HT
frequency	8,0 MHz
holder type	HC-49/U3H
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance at -40° ~ + 85°C	± 50 ppm
load capacitance C_L	16 pF
series resonance R_1 max.	80 Ohm
aging at +25°C (first year) max.	± 5 ppm
shunt capacitance C_0 max.	7 pF
drive level max.	0,5 mW


Dimensions (mm):

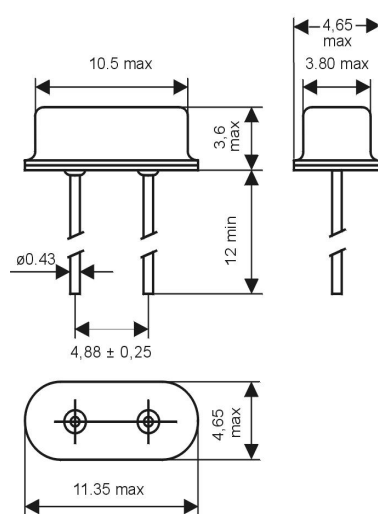

Wave soldering condition:

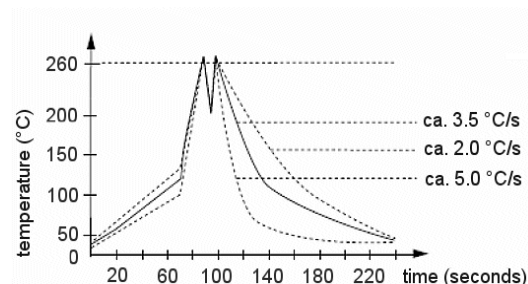

Tape specification:

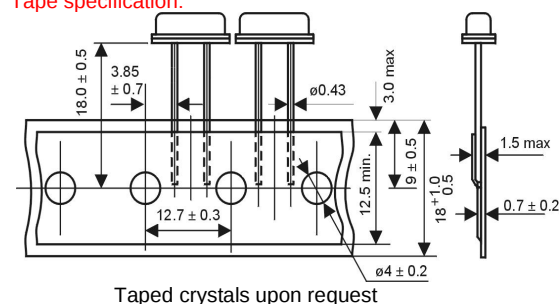

Taped crystals upon request