

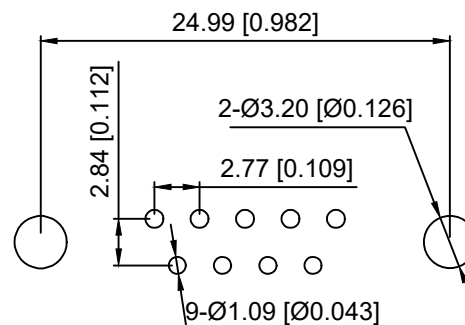
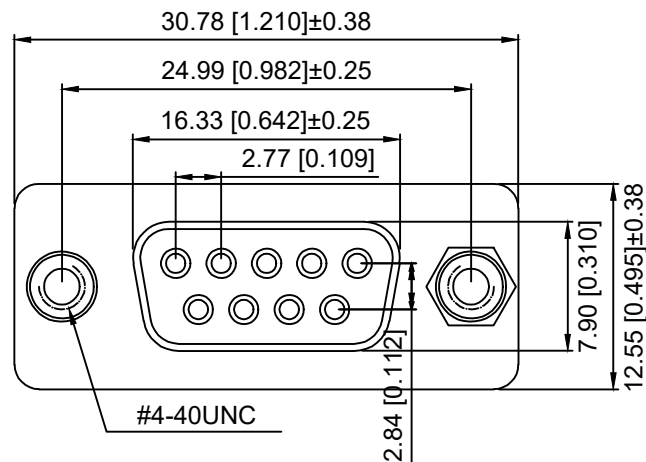


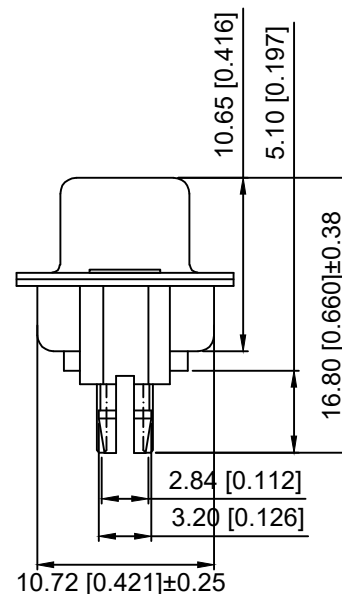

PCB LAYOUT

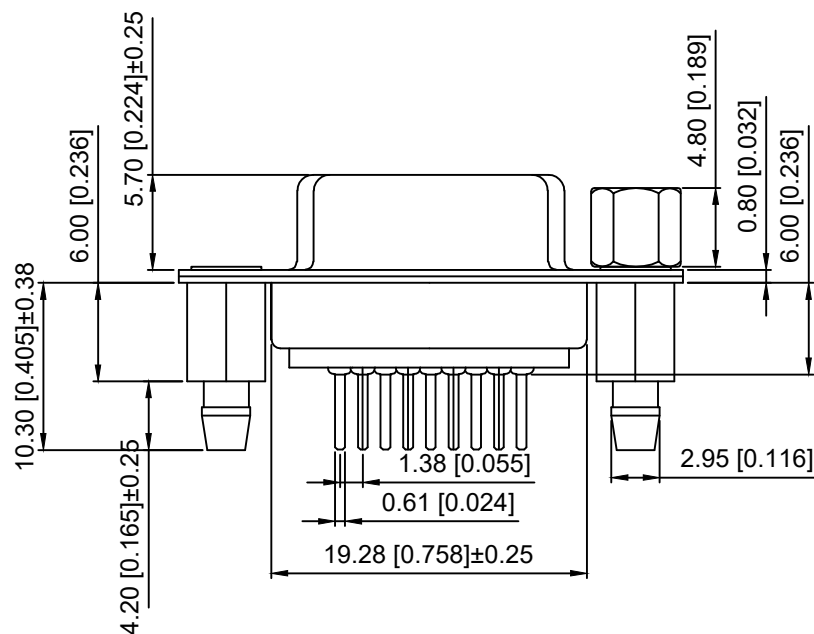

Specifications:

规格:

1.Voltage rating:250VAC/DC

额定电压: 250V AC/DC

2.Current rating:3A AC/DC

额定电流:3A AC/DC

3.Withstanding voltage:1000V AC/minute

耐受电压: ≥1000V AC/分钟

4.Temperature range: -25℃~+80℃

温度范围: -25℃~+80℃

5.Insulation resistance:5000MΩMIN

绝缘电阻: ≥5000MΩ

6.Contact resistance:30mΩMax

接触电阻: ≥30mΩ

Material:

材料:

7.Rubber core:PBT UL94V-0

胶芯: PBT UL94V-0

8.The iron shell:SPCC Terminal half-Gold 15u Matte Tin

铁壳: SPCC 半金15u雾锡

B、成品不能有弯针，R角不一致等不良。

X02 09 F T 17 B X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series NO.
② Row No.Pin No.XX-09;
③ Welding Board Angle :F-Female
④ T: Tradtional
⑤ Planting Category: 17-Terminal half-Gold 15u Matte Tin
⑥ Color:B-BLACK
⑦ 5:TYPE-5; 7:TYPE-7

铆合方式	TYPE-7:后铆鱼叉	TYPE-5:铆鱼叉锁螺丝
图示		

								DSND		SCALE: N/A	MODEL TYPE: D-USB			
ΔX					ANGLAR	$\pm 5^{\circ}$		DWN		VIEW: 	PART NO.: X0209FT17BX			
ΔX					$4 < L \leq 16$	± 0.3		CHKD		UNIT: mm/in	DWG NO.: X-X0209FT17BX			
ΔX					$16 < L \leq 63$	± 0.4		APPD		SIZE: A4				
MARK	DESCRIPTION	DATE	REVISED	APPROVED	$L > 63$	± 0.5								
REVISIONS							UNSPECIFIED TOLERANCES							
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn							XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET 1/1	REVISION A0