

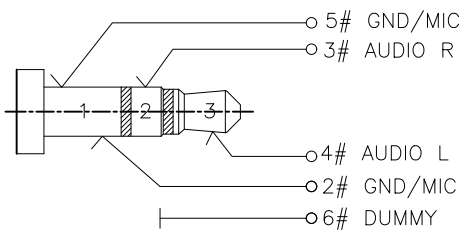
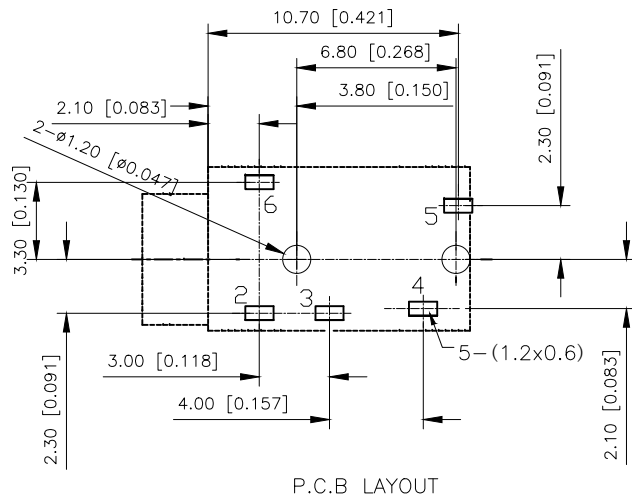
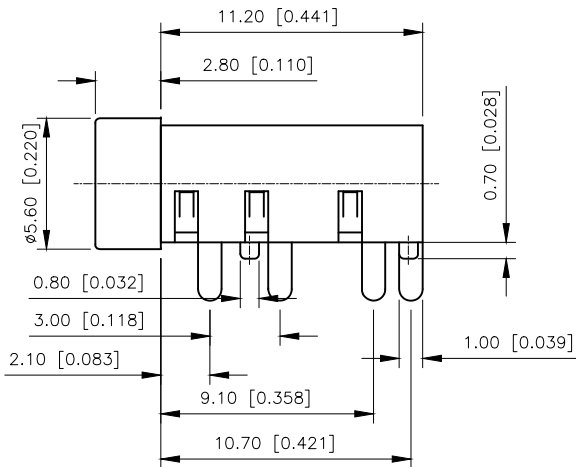


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图片面升级整理图面	2024.08.10	阿 树

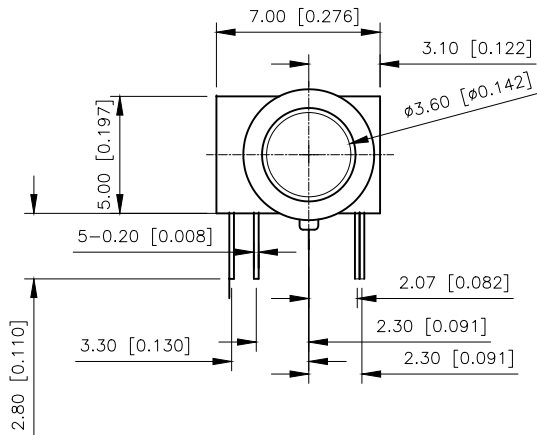


SCHEMATIC

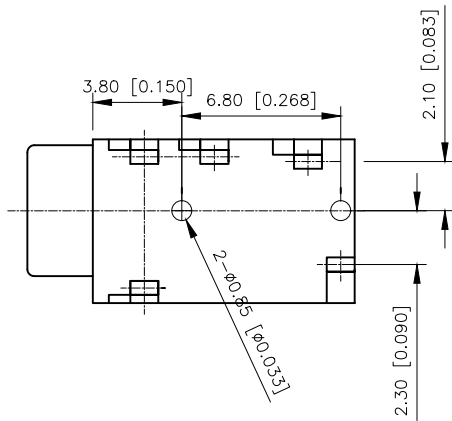

Rating:DC 30V/1A
Withstanding voltage:500V AC/分钟
Temperature range:-20℃-+70℃
Insulation resistance:>100MMin
Contact resistance:<30m2 Max
Plugging force:5-25N
Life test:≥ 5000次

MATERIAL PLATING			
terminal 2	Phosphor	Bronze	tin
terminal 3	Phosphor	Bronze	tin
terminal 4	Phosphor	Bronze	tin
terminal 5	Phosphor	Bronze	tin
terminal 6	Phosphor	Bronze	tin
plastic	Pbt		

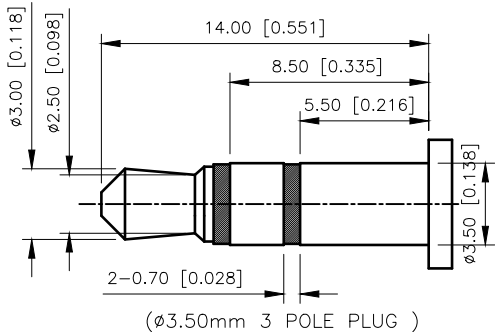

(3.50mm 3 POLE PLUG)

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED

DESIGN	阿 树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	3.50mm PHONE JACK
APPROVED		SIZE: A4	PART NO.: PJ-320E
			DWG NO.:
SCALE	PAGE	REVISION	
N/A	1/1	A1	