

## PCB terminal block - PTA 1,5/ 9-5,0 - 1988875

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, nominal current: 17.5 A, nom. voltage: 400 V, pitch: 5 mm, number of positions: 9, connection method: Screw connection with wire protector, mounting: Wave soldering, conductor/PCB connection direction: 45 °, color: green



The figure shows a 10-position version of the product

### Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ High terminal block capacity thanks to rectangular terminal block space
- ✓ Allows connection of two conductors
- ✓ Angled connection enables multi-row arrangement on the PCB
- ✓ The latching on the side enables various numbers of positions to be combined



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| Minimum order quantity               | 100 pc                                                                                                  |
| GTIN                                 | <br>4 046356 036863 |
| GTIN                                 | 4046356036863                                                                                           |
| Weight per Piece (excluding packing) | 9.560 g                                                                                                 |
| Custom tariff number                 | 85369010                                                                                                |
| Country of origin                    | Greece                                                                                                  |

### Technical data

#### Dimensions

|              |         |
|--------------|---------|
| Length [ l ] | 12.8 mm |
| Pitch        | 5 mm    |

# PCB terminal block - PTA 1,5/ 9-5,0 - 1988875

## Technical data

### Dimensions

|                |         |
|----------------|---------|
| Dimension a    | 40 mm   |
| Width [ w ]    | 45 mm   |
| Height         | 11.9 mm |
| Height [ h ]   | 15.4 mm |
| Solder pin [P] | 3.5 mm  |
| Pin spacing    | 5 mm    |
| Hole diameter  | 1.3 mm  |

### General

|                                        |                     |
|----------------------------------------|---------------------|
| Range of articles                      | PTA 1,5             |
| Insulating material group              | I                   |
| Rated surge voltage (III/3)            | 4 kV                |
| Rated surge voltage (III/2)            | 4 kV                |
| Rated surge voltage (II/2)             | 4 kV                |
| Rated voltage (III/3)                  | 250 V               |
| Rated voltage (III/2)                  | 400 V               |
| Rated voltage (II/2)                   | 630 V               |
| Connection in acc. with standard       | EN-VDE              |
| Nominal current $I_N$                  | 17.5 A              |
| Nominal cross section                  | 1.5 mm <sup>2</sup> |
| Maximum load current                   | 24 A                |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |
| Internal cylindrical gage              | A1 / B1             |
| Stripping length                       | 5 mm                |
| Number of positions                    | 9                   |
| Screw thread                           | M2,6                |
| Tightening torque, min                 | 0.35 Nm             |
| Tightening torque max                  | 0.4 Nm              |

### Connection data

|                                                                            |                      |
|----------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                         | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.                                         | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                                      | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible max.                                      | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.    | 0.25 mm <sup>2</sup> |

## PCB terminal block - PTA 1,5/ 9-5,0 - 1988875

### Technical data

#### Connection data

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| Conductor cross section flexible, with ferrule with plastic sleeve max.                 | 1.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                                                        | 26                   |
| Conductor cross section AWG max.                                                        | 14                   |
| 2 conductors with same cross section, solid min.                                        | 0.14 mm <sup>2</sup> |
| 2 conductors with same cross section, solid max.                                        | 1 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded min.                                     | 0.14 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded max.                                     | 0.75 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.   | 0.25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.   | 0.34 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.75 mm <sup>2</sup> |

#### Standards and Regulations


|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CUL    |
| Flammability rating according to UL 94 | V0     |

#### Environmental Product Compliance


|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

Drilling diagram




Diagram

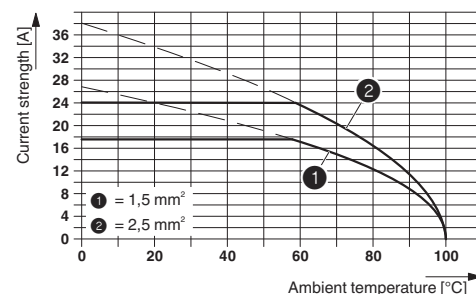


PCB terminal block - PTA 1,5/ 9-5,0 - 1988875

Dimensional drawing



Dimensional drawing

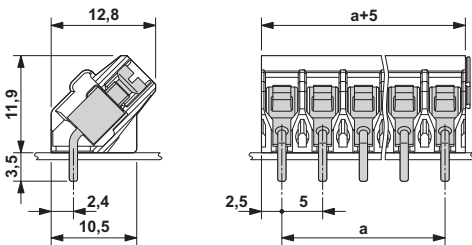

Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27141109 |
| eCl@ss 5.0 | 27141190 |
| eCl@ss 5.1 | 27261100 |
| eCl@ss 6.0 | 27261100 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002643 |
| ETIM 5.0 | EC002643 |
| ETIM 6.0 | EC002643 |

UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11     | 34131203 |
| UNSPSC 12.01  | 39121432 |
| UNSPSC 13.2   | 39121432 |

Approvals

Approvals

Approvals

IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

## PCB terminal block - PTA 1,5/ 9-5,0 - 1988875

### Approvals

Ex Approvals

### Approval details

|                    |                                                                                   |                                                           |           |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|-----------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58868 |
| Nominal voltage UN | 250 V                                                                             |                                                           |           |
| Nominal current IN | 24 A                                                                              |                                                           |           |
| mm²/AWG/kcmil      | 0.2-2.5                                                                           |                                                           |           |

|                                            |                                                                                   |                                                                                                                                                                                                                |          |
|--------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40031691 |
| Nominal voltage UN                         | 250 V                                                                             |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 24 A                                                                              |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.2-2.5                                                                           |                                                                                                                                                                                                                |          |

|     |                                                                                     |         |
|-----|-------------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-------------------------------------------------------------------------------------|---------|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-20030211 |
|                    | D                                                                                   | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 10 A                                                                                | 15 A                                                                                                                                                  |                 |
| mm²/AWG/kcmil      | 26-12                                                                               | 26-12                                                                                                                                                 |                 |

### Accessories

Accessories

Labeled terminal marker

## PCB terminal block - PTA 1,5/ 9-5,0 - 1988875

### Accessories

Marker card - SK 5/3,8:FORTL.ZAHLEN - 0804183



Marker card, Card, white, labeled, Horizontal: consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, mounting type: adhesive, for terminal block width: 5 mm, lettering field size: 5 x 3.8 mm

---

### Screwdriver tools

Screwdriver - SZS 0,6X3,5 - 1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip