




FCIconnect.com

Copyright FCI

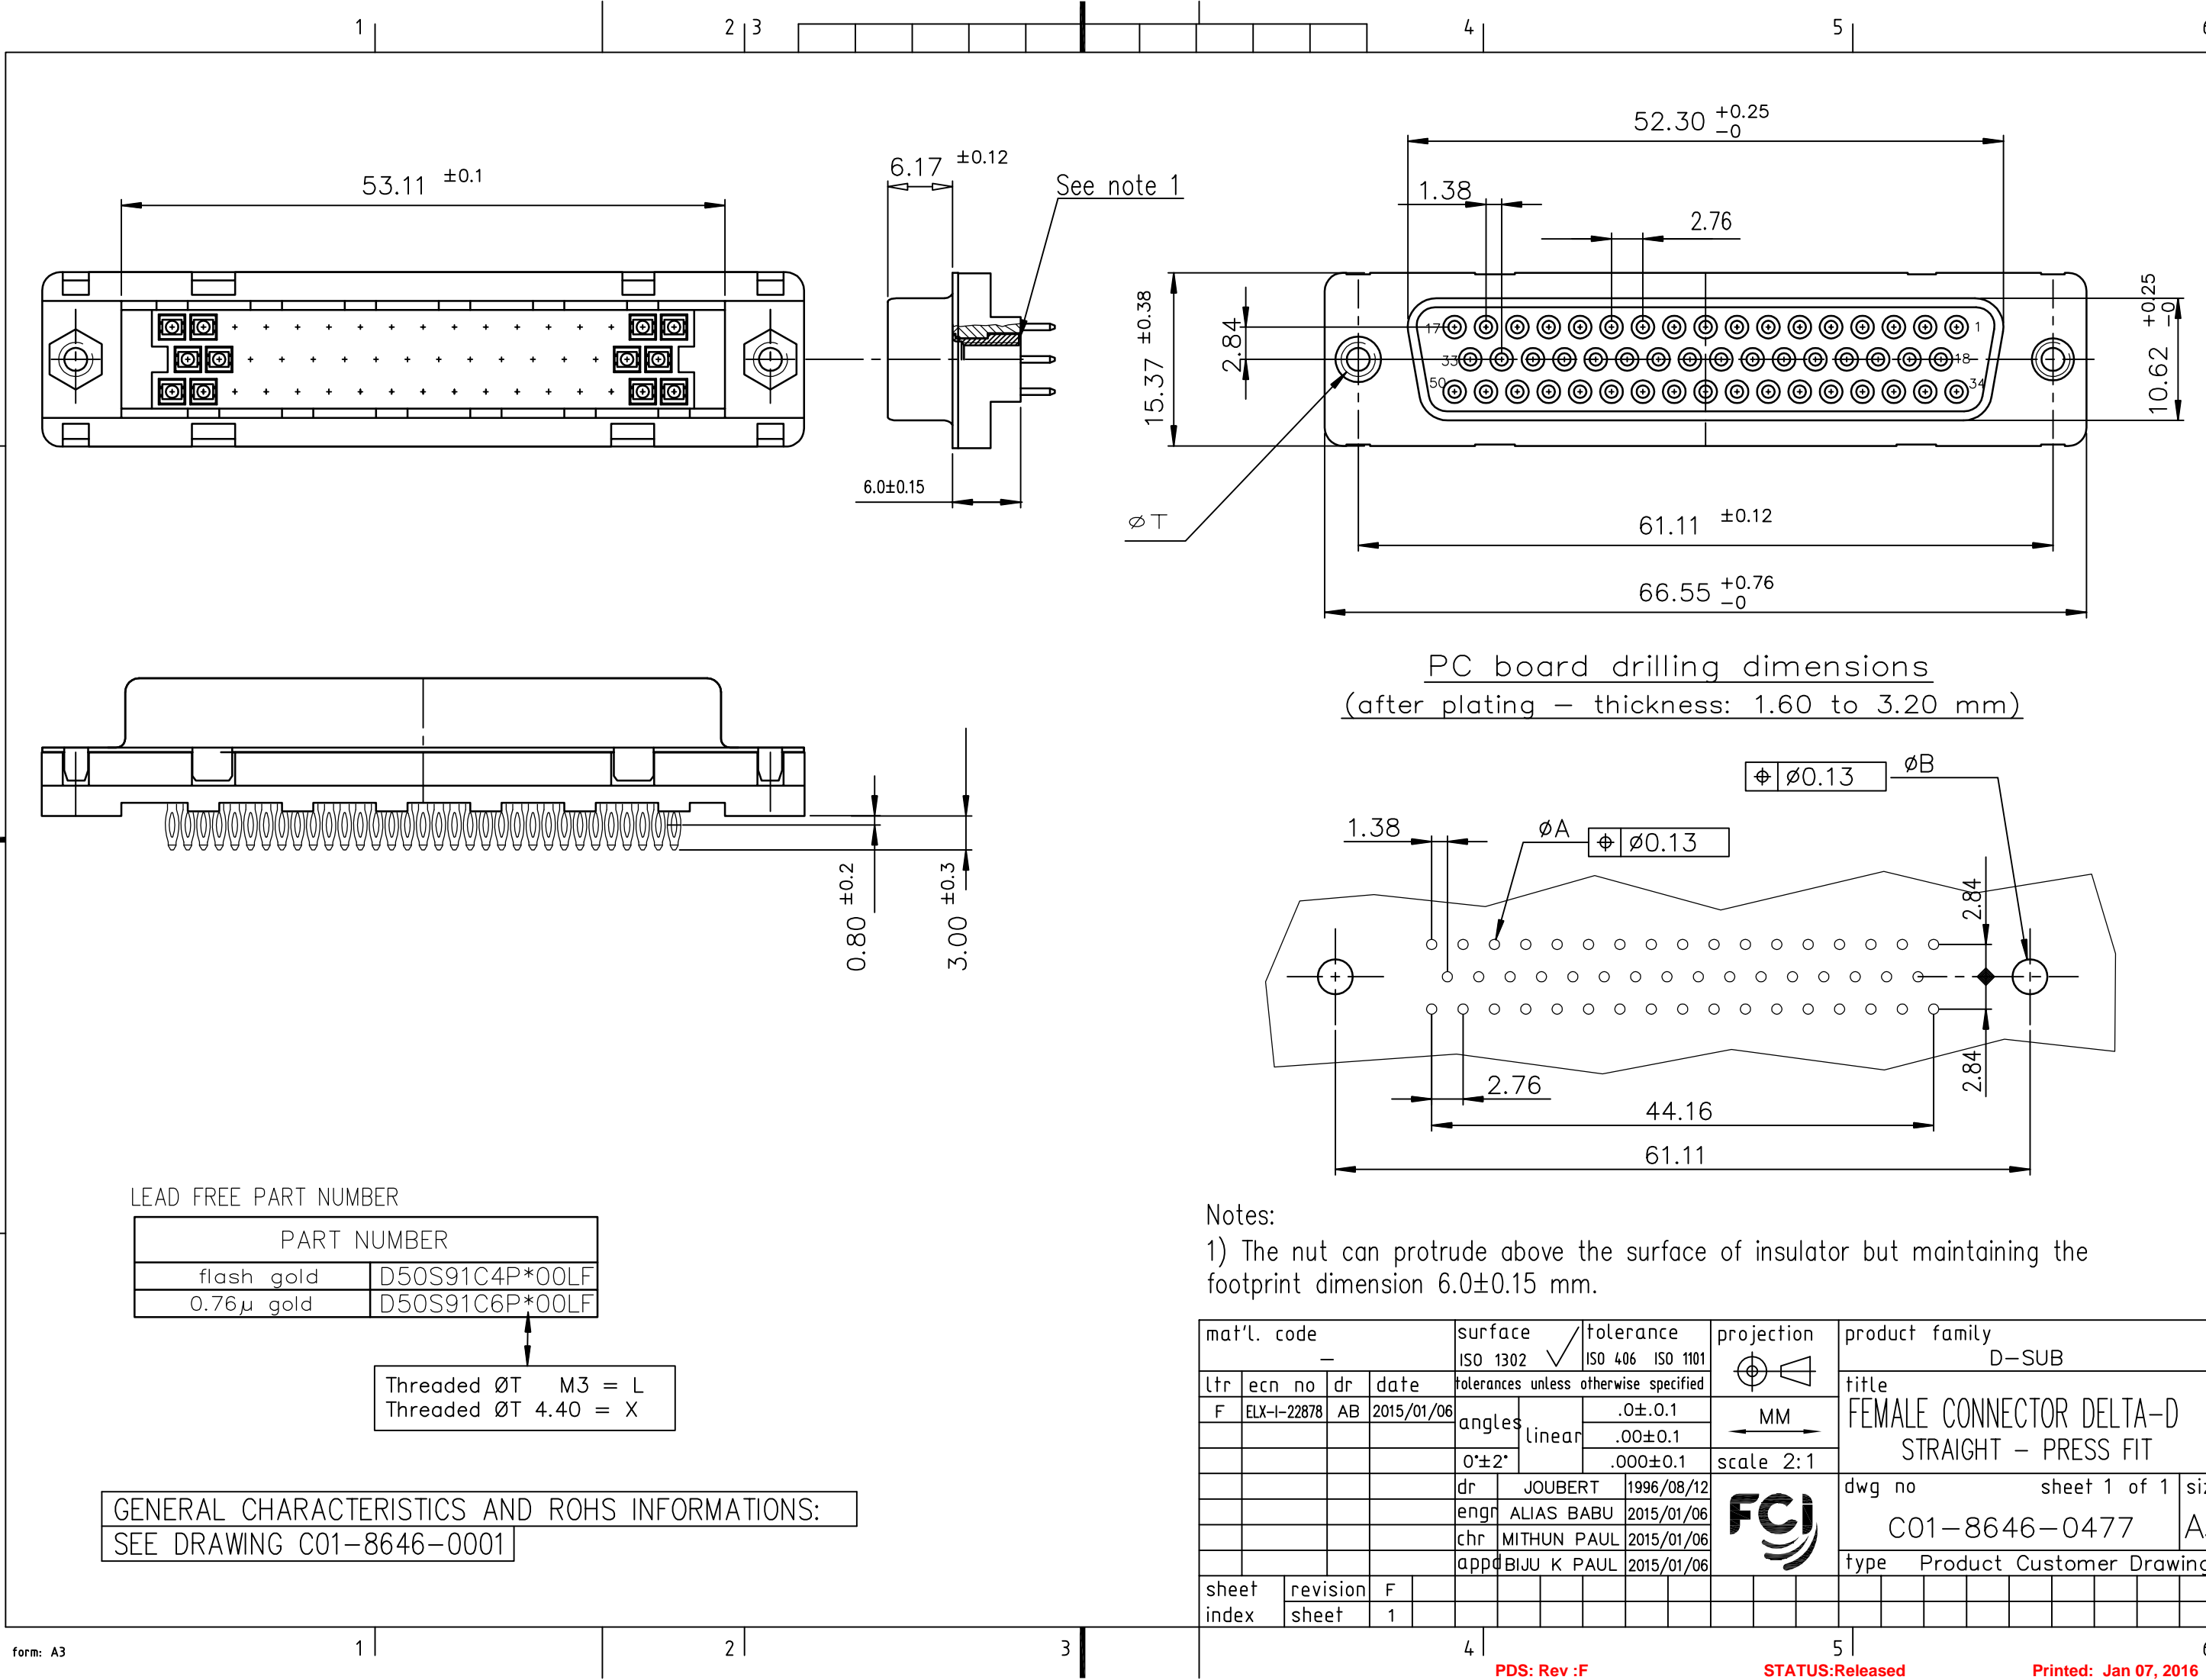

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4P*00LF
0.76µ gold	D50S91C6P*00LF

Threaded ØT M3 = L
Threaded ØT 4.40 = X

GENERAL CHARACTERISTICS AND ROHS INFORMATION:
SEE DRAWING C01-8646-0001

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

mat'l. code				surface		tolerance		projection		product family											
—				ISO 1302		ISO 406 ISO 1101				D-SUB											
ltr	ecn no	dr	date	tolerances unless otherwise specified								title FEMALE CONNECTOR DELTA-D STRAIGHT – PRESS FIT									
F	ELX-I-22878	AB	2015/01/06	angles	linear	.0±.0.1															
						.00±0.1															
				0°±2°		.000±0.1		scale 2:1													
				dr	JOUBERT		1996/08/12				dwg no				sheet 1 of 1				size		
				enr	ALIAS BABU		2015/01/06				C01-8646-0477				A3						
				chr	MITHUN PAUL		2015/01/06														
				app	BIJU K PAUL		2015/01/06				type				Product Customer Drawing						
sheet index		revision		F																	
		sheet		1																	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D50S91C4PL00LF](#) [D50S91C4PX00LF](#) [D50S91C6PL00LF](#) [D50S91C6PX00LF](#) [D50S91C4PL00](#) [D50S91C4PX00](#)
[D50S91C6PL00](#) [D50S91C6PX00](#)