

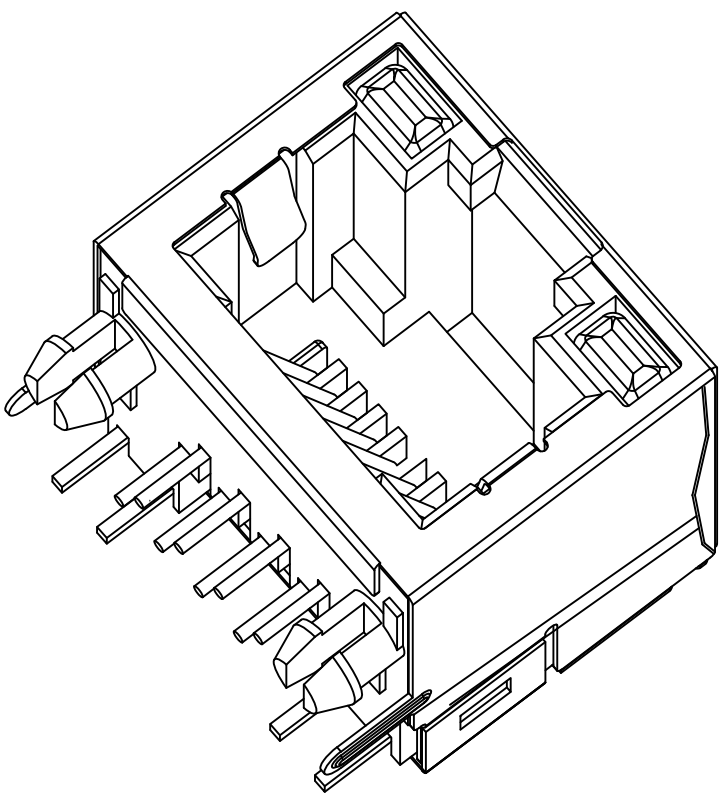
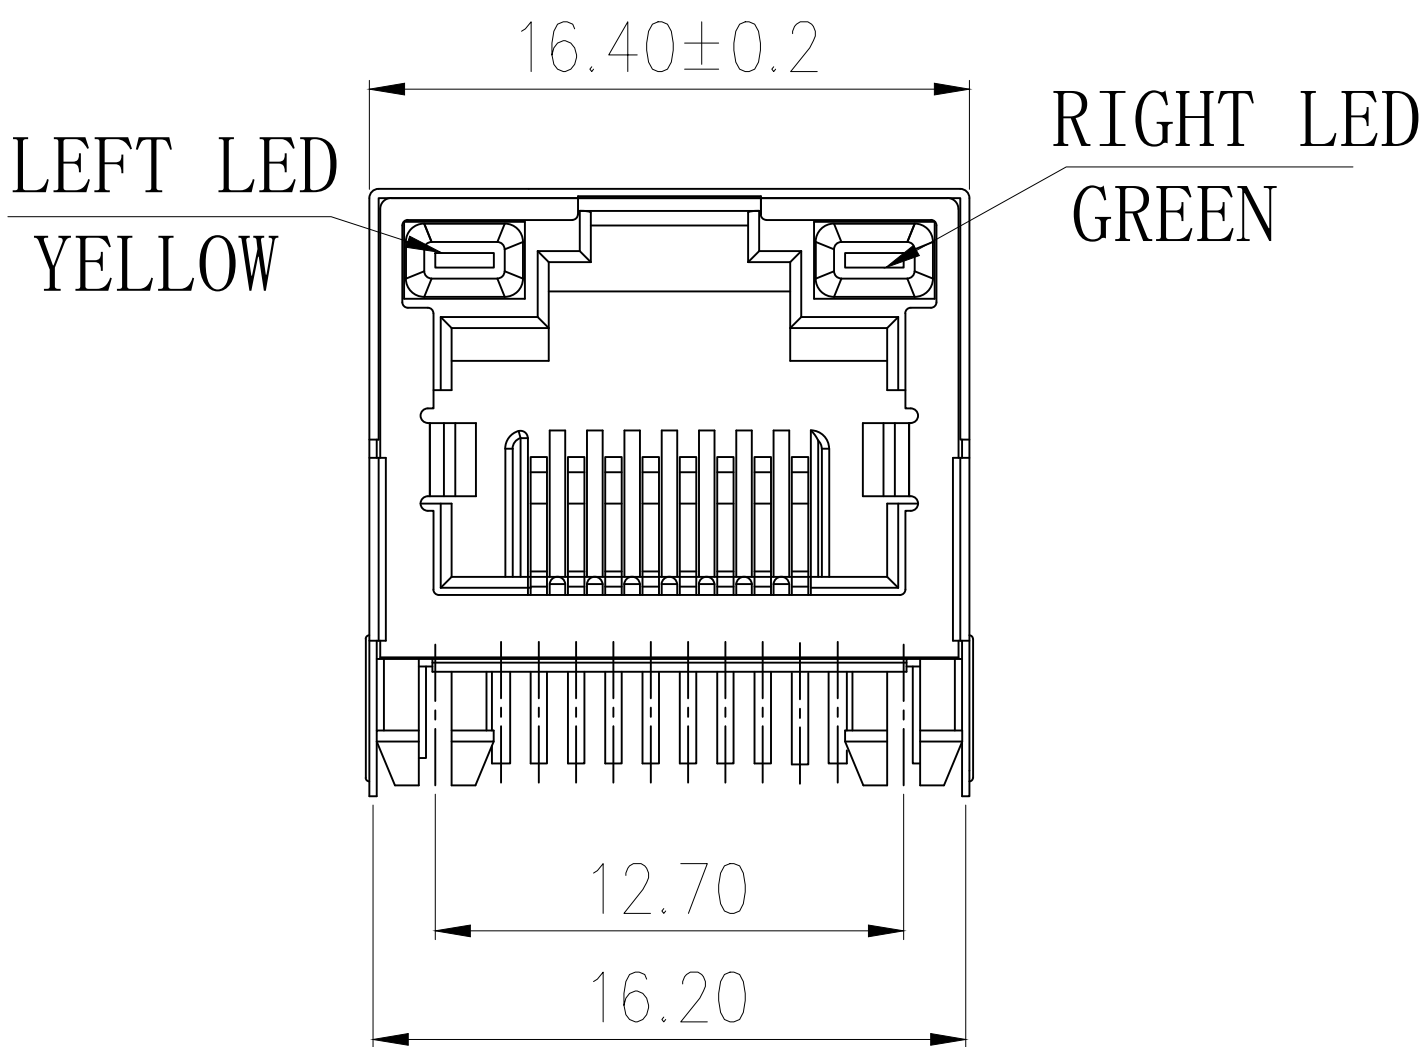
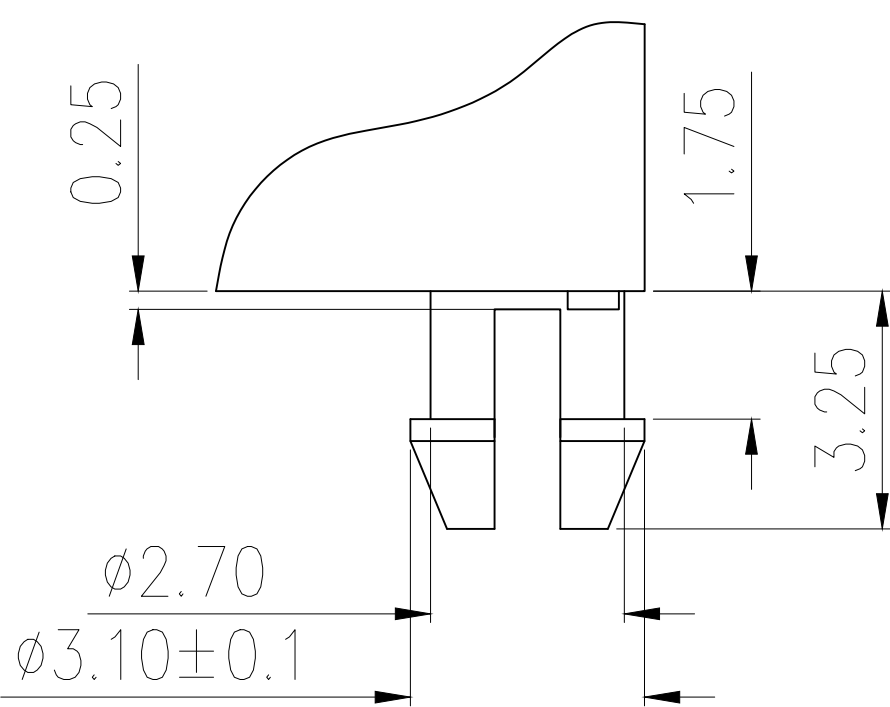



7		8		9	
标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE	

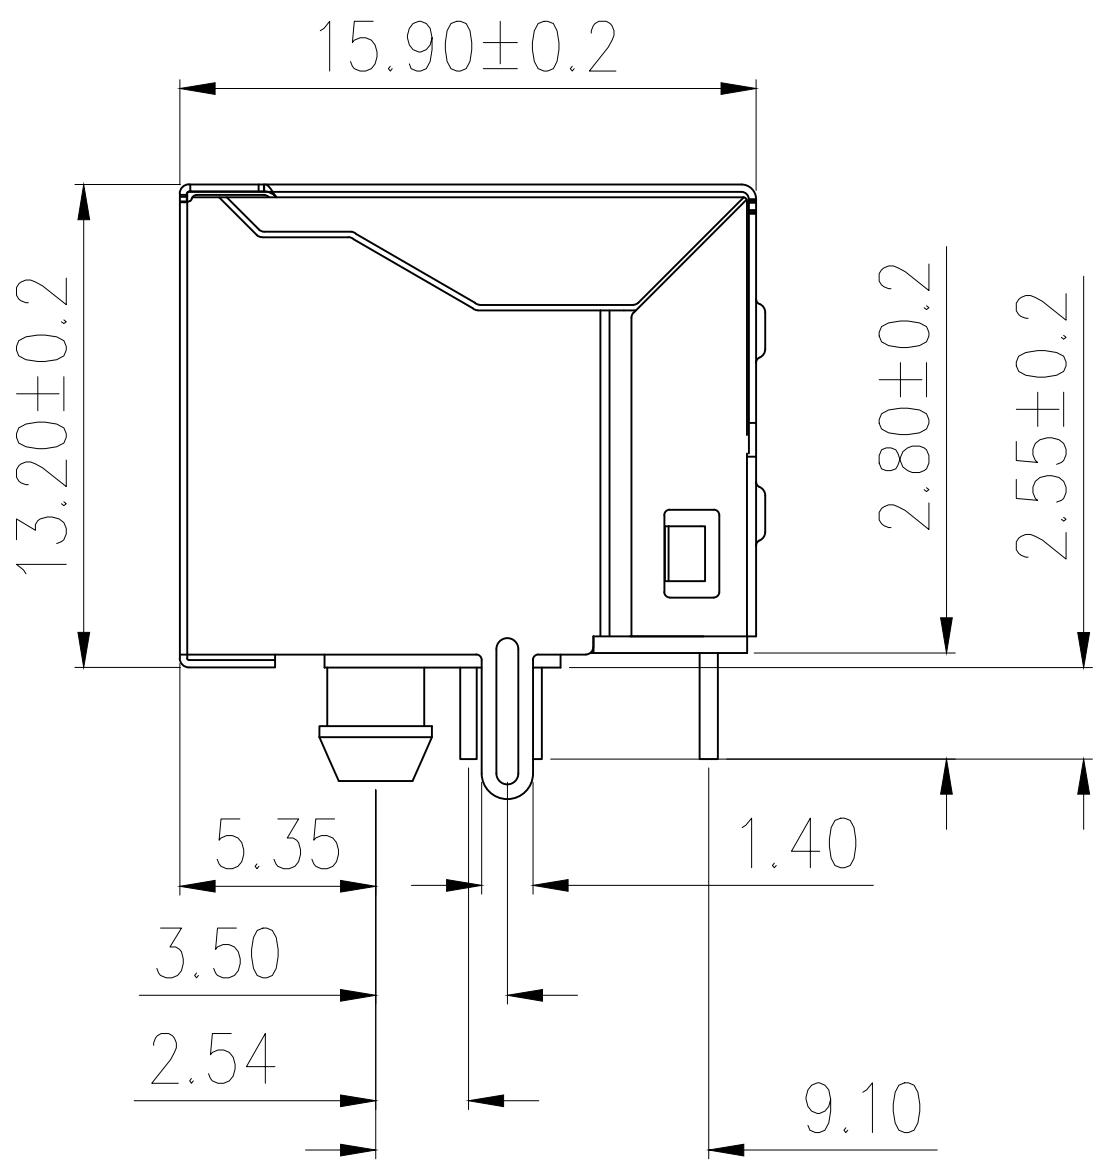

3D VIEW

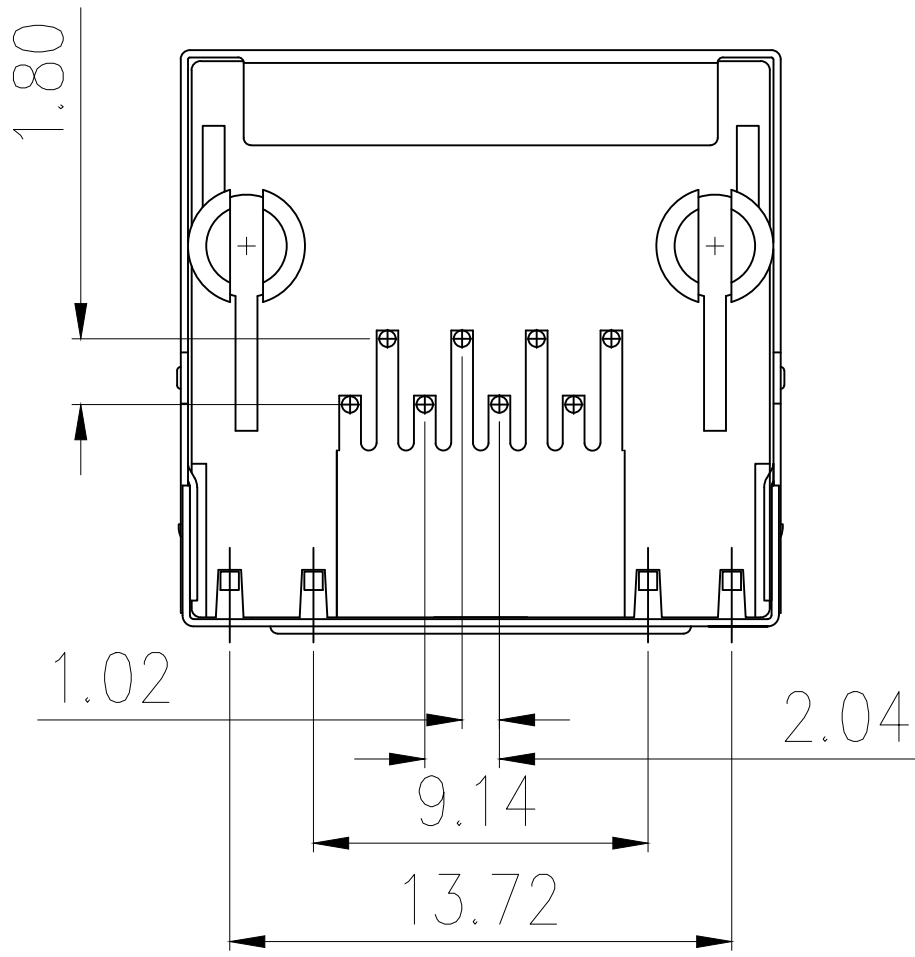

DETAIL "X"
SCALE 2:1

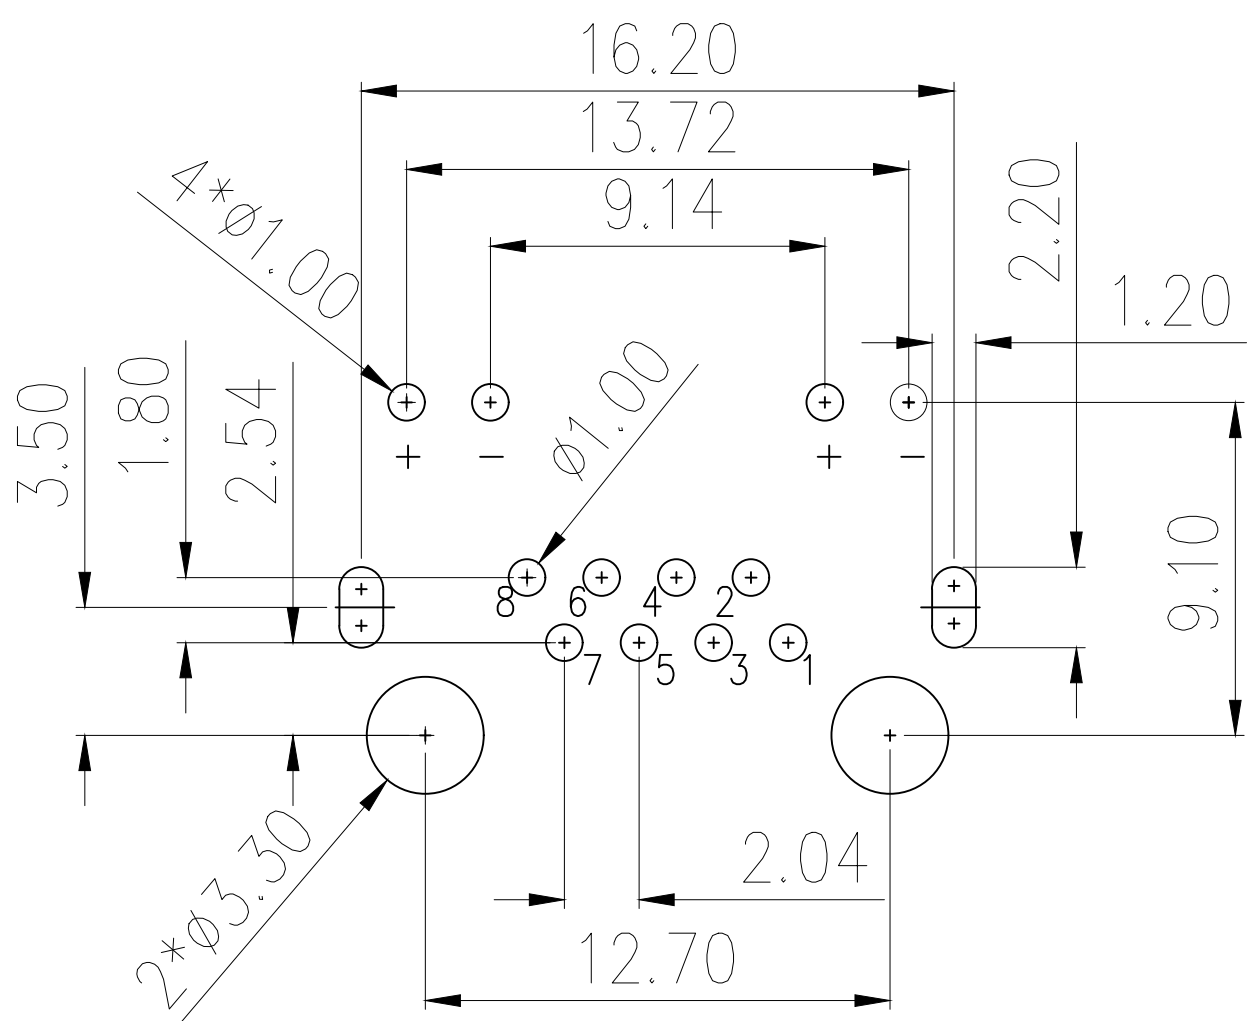

- NOTES:
- MATERIAL:
 - HOUSING: PBT ,COLOR IS BLACK;
 - CONTACT: PHOSPHOR BRONZE, $\phi 0.46 \pm 0.02$ mm;
 - SHELL: BRASS T= 0.2 ± 0.02 mm;
 - FINISH:
 - CONTACT: PLATED GOLD OVER NI;
 - SHELL: NI OVER ALL;
 - RECINNEBDED PCB THICKNESS: 1.60mm;
 - ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 35MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 1000MEGOHMS MIN @500V DC;
 - MECHANICAL:
 - MATING/UNMATING FORCE: 25N MAX.;
 - RETENTIION STRENGTH: 50N MIN.;
 - OPERATING LIFE: 750 CYCLES MIN.;
 - SALT SPRAY TEST: 12H (Excluding riveted bends);
 - SOLDERABILITY: $245 \pm 5^{\circ}\text{C}$, 5 ± 0.5 S;
 - RESISTANCE TO SOLDER: $260 \pm 5^{\circ}\text{C}$, 10 ± 1 S;
 - ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$;
 - OPERATION TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$;
 - MATES WITH:MODULAR PLUGS THAT CONFORM TO FCC REGULATION PART 68.500;

3	外壳	铜	镀镍	
2	接触	铜	镀金	
1	基座	PBT	黑色	
序 号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	网口	
料 号 PART NO	HC-WK88-H16-DK	

GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1			
X.xxx ±0.10 X.xx ±0.20 X.x ±0.30		单 位 UNIT	MM	制 图 DRAW	AhYe	
X.xx° ±1° X.x° ±3° X.° ±5°		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云	
		版 本 REV	A	批 准 APPROVE	赵亮亮	