

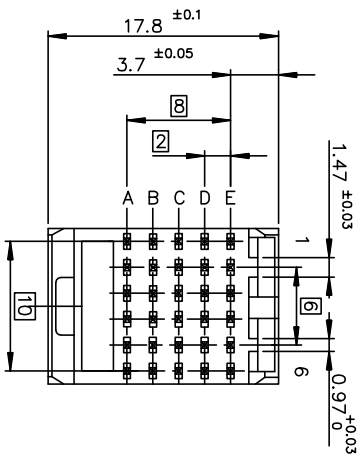


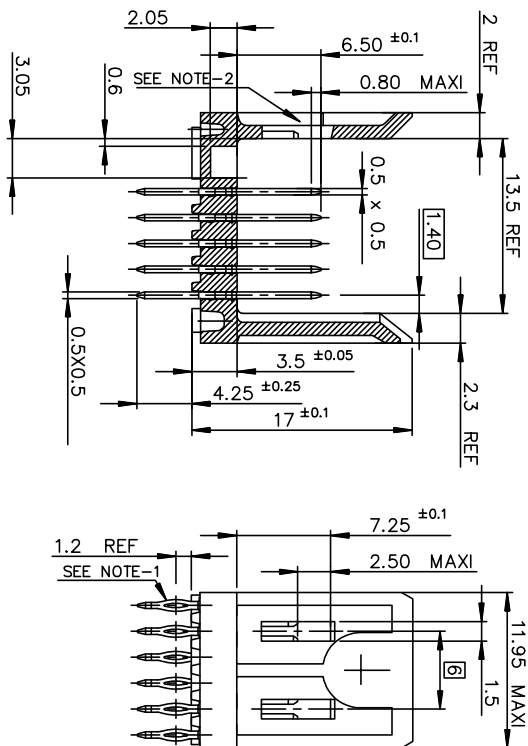

LAYOUT FOR P.C.B

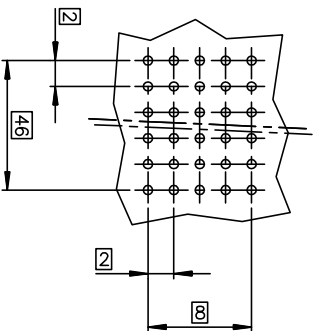

GENERAL CHARACTERISTICS AND ROHS INFORMATION:

SEE PRODUCT SPECIFICATION GS-12-445

NOTE-1: "EYE OF THE NEEDLE" PRESS-FIT PIN TYPE

NOTE-2: CAVITY FOR CODING KEY MOUNTING AND CABLE CONNECTOR LATCH.

NOTE-3: IF SUFFIX "P" IS ADDED IN P/N PACKAGING IS IN TRAYS

BUT CONNECTOR MARKING IS WITHOUT "P"

EXAMPLE: HM1W51DPR400H6P, MARKED HM1W51DPR400H6

NOTE-4: INSERTION TOOLING ON PCB, SEE DRAWING REF C-8626-1002

NOTE-5: P.C.B HOLES DEFINITION - SEE GS-12-445

SPECIFIC DATAS:

Visual inspection : 100%

- Marking failures
- Housing material failures
- Spoilt housing
- Stained Housing
- Broken contacts (twisted or loosen)

PART NUMBER

HM1W51DPR400H*P(LF)

LF = FOR LEAD FREE PRODUCT

PLATING CODE:

6 = TELCORDIA CO

E = CUSTOMER SPECIAL, CONTACT

30u" GOLD SELECTIVE PLATING.

European Views

www.fciconnect.com

www.fciconnect.com			surface ISO 1302	✓	tolerance std ISO 406 ISO 1101	projection 	mm 
TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	PERRICHOT	2001/01/25	ANGULAR		0.X	±0.1	size A3
Eng	LENOIR	2001/01/25	LINEAR		0.XX	±0.1	Scale 2.5
Chr	LEGARE	2001/01/25	0.XX' ±2"		0.XXX	±0.1	ECN DG09-0367
Appr	LEGARE	2001/01/25	Product family				METRAL Spec ref -

METRAL STRAIGHT HEADER -22 WAY
SP 400
catalog noC-8626-11104
CUSTOMER sheet 1 of 1