

# C3216C0G2J101J060AA (TDK item description : C3216C0G2J101JT\*\*\*\*)

Applications



Commercial Grade



Please refer to Part No. CGA5C4C0G2J101J060AA for automotive use.


Feature

Mid

Mid Voltage (100 to 630V)

Series

C3216 [EIA CC1206]

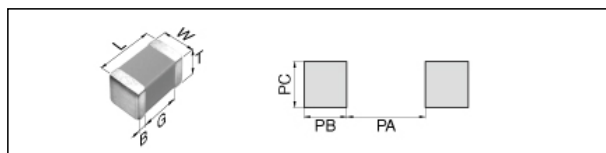


Size	
Length(L)	3.20mm +/-0.20mm
Width(W)	1.60mm +/-0.20mm
Thickness(T)	0.60mm +/-0.15mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	1.00mm Min.
Recommended Land Pattern(PA)	2.10 to 2.50mm (Flow Soldering) 2.00 to 2.40mm (Reflow Soldering)
Recommended Land Pattern(PB)	1.10 to 1.30mm (Flow Soldering) 1.00 to 1.20mm (Reflow Soldering)
Recommended Land Pattern(PC)	1.00 to 1.30mm (Flow Soldering) 1.10 to 1.60mm (Reflow Soldering)
Recommended Slit Pattern(SD)	

Electrical Characteristics	
Capacitance	100pF +/-5%
Rated Voltage	630Vdc
Temperature Characteristic	C0G(0+/-30ppm/degC)
Q	1000 Min.
Insulation Resistance	10000MΩ Min.


Other	
Soldering Method	Reflow, Flow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.

# C3216C0G2J101J060AA


## Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

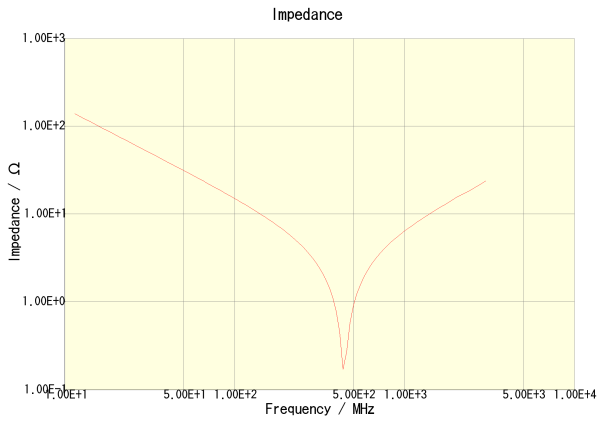


C3216C0G2J101J060AA

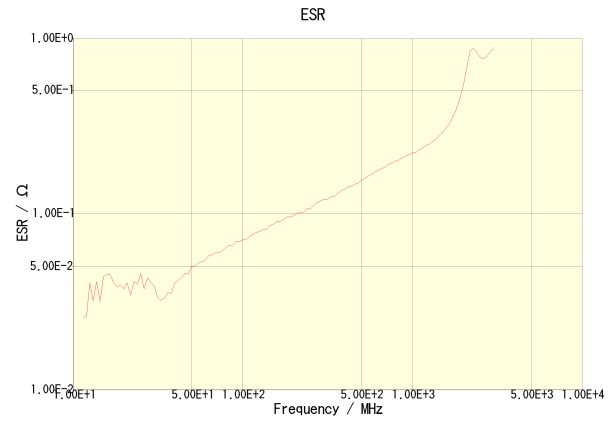


C3216C0G2J101J060AA

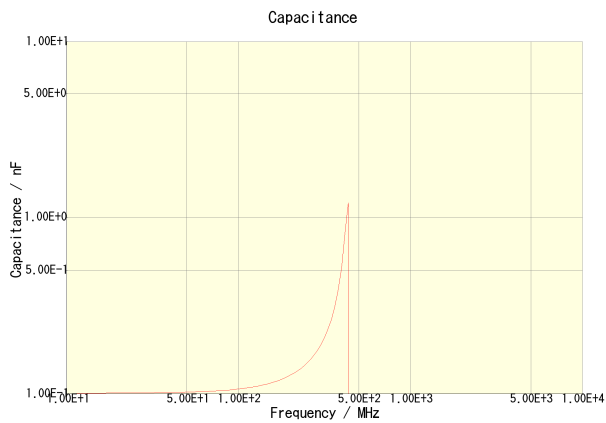

C3216C0G2J101J060AA

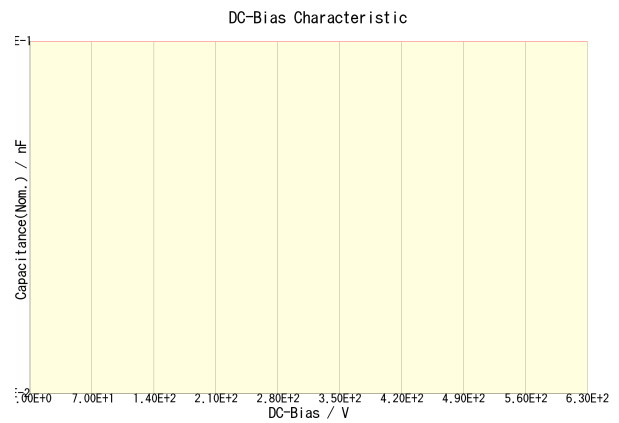

C3216C0G2J101J060AA

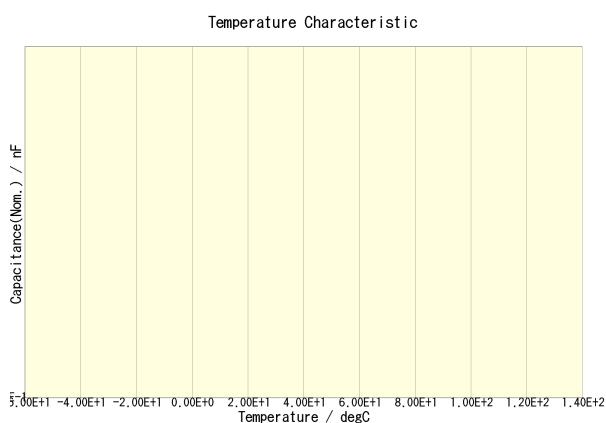

C3216C0G2J101J060AA(DC Bias = 0V)C3216C0G2J101J060AA(DC Bias = 315V)

