

版本 1.0	变更履历 CHANGE HISTORY	变更日期 DATE
-----------	------------------------	--------------

B $\pm$ 0.25

0.64 $\pm$ 0.05

6.35 $\pm$ 0.25
5.80 $\pm$ 0.20

10.50 $\pm$ 0.25
9.20 $\pm$ 0.20
3.40 $\pm$ 0.20
7.10 $\pm$ 0.25




0.80 $\pm$ 0.20

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 1000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

TYPE 1

TYPE 2

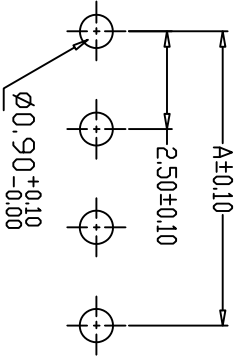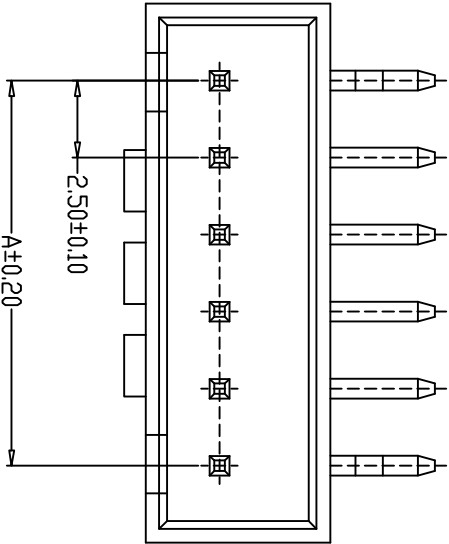

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A2504-02AWD	2.50	7.50
A2504-03AWD	5.00	10.00
A2504-04AWD	7.50	12.50
A2504-05AWD	10.00	15.00
A2504-06AWD	12.50	17.50
A2504-07AWD	15.00	20.00
A2504-08AWD	17.50	22.50
A2504-09AWD	20.00	25.00
A2504-10AWD	22.50	27.50
A2504-11AWD	25.00	30.00
A2504-12AWD	27.50	32.50
A2504-20AWD	47.50	52.50



X $\pm$ 0.5

X $\pm$ 0.30

X $\pm$ 0.20

XXX $\pm$ 0.005

单位
UNIT

mm

比例
SCALE

1:1

审核:
CHECKED BY

2022.9.2

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

版本: 1.0

页次: 1/1

日期:

客户编号
Client No

HA定位弯针

TH-A2504-VAWD