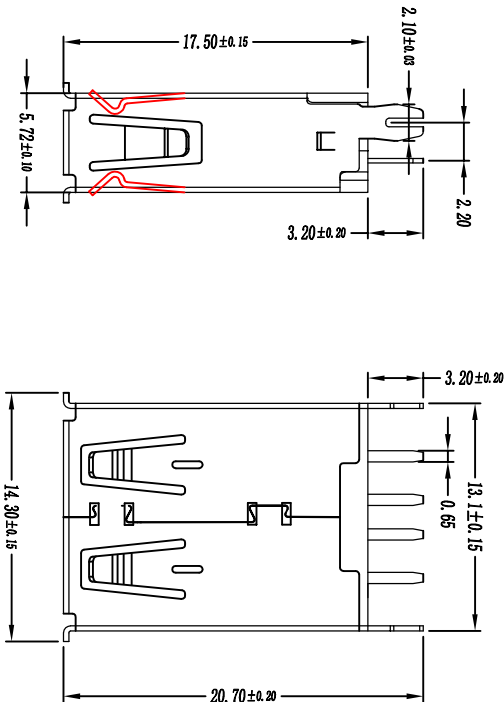


PCB LAYOUT

规格说明: Specifications:
电气特性: Electrical:

1. 额定电流: Current Rating 1.5A/contact terminal
2. 额定电压: Voltage Rating 30V DC
3. 接触阻抗: Contact Resistance 30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage: 500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance: 1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention 1.2kgf(MIN)

原材料: Material:

1. 塑胶: Housing: Hing Temperature Ternmaplastics, PBT White/Black
 2. 端子: Contact: Copper Alloy C2680
 3. 外壳: Shell: Copper Alloy C2680/SPCC
- 电镀: Finish:
1. 端子: Contact: Plated Gold in Mating Area; Tin On Solder Tails
 2. 外壳: Shell: Nickel Plating

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位 (UNIT): MM
品名 (ITEM NO)	USB AF 180 度 17.5 MM 卷 边 直 脚	版本 (REV)		比例 (SCALE) 1:1
料号 (PART NO)	USB2.0-AF-ZCI-JB-17.5	日期 (DATE)		 未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° X° ±5° X.X° ±2°
模号 (MODEL NO)		设计 (DESIGN)		
		审核 (CHECKED)		
		核准 (APPROVED)		