

2896429

<https://www.phoenixcontact.com/us/products/2896429>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U22) with vents, Installation depth connection technology: 22.35 mm, width: 53.6 mm, height: 89.7 mm, depth: 49.78 mm, color: light gray (similar RAL 7035)

Your advantages

- Coordinated housing and connection system for faster device development
- Individual online configuration for diverse applications in building automation
- Variety of connection technology
- Can be mounted on the DIN rail or the wall
- With DIN-rail-mountable bus connector and power connector system as an option
- Tool-free mounting
- Available in overall widths from one to nine HP (17.8 mm ... 161.6 mm)
- Compliant with DIN EN 43880

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2896429             |
| Packing unit                         | 10 pc               |
| Minimum order quantity               | 10 pc               |
| Sales key                            | AC10                |
| Product key                          | ACHBAB              |
| Catalog page                         | Page 699 (C-1-2013) |
| GTIN                                 | 4046356103206       |
| Weight per piece (including packing) | 23.55 g             |
| Weight per piece (excluding packing) | 23.39 g             |
| Customs tariff number                | 84879090            |
| Country of origin                    | DE                  |

Technical data

Notes

|               |                                                             |
|---------------|-------------------------------------------------------------|
| Assembly note | Refer to the data sheet for the range in the download area. |
|---------------|-------------------------------------------------------------|


Product properties

|                              |                                                                              |
|------------------------------|------------------------------------------------------------------------------|
| Product type                 | Upper housing part                                                           |
| Housing type                 | DIN rail housing for use in distribution boards in accordance with DIN 43880 |
| Housing series               | BC                                                                           |
| Product family               | BC 53,6..                                                                    |
| Max. number of positions     | 32 (pitch: 2.5 mm)                                                           |
|                              | 24 (pitch: 3.5 mm)                                                           |
|                              | 20 (pitch: 5 mm)                                                             |
|                              | 12 (pitch: 7.5 mm)                                                           |
| Type                         | Upper housing part (U22) with vents                                          |
| Ventilation openings present | yes                                                                          |

Data management status

|                  |    |
|------------------|----|
| Article revision | 01 |
|------------------|----|

Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 53.6 mm                                                                              |
| Height              | 89.7 mm                                                                              |
| Depth               | 49.78 mm                                                                             |
| Horizontal pitch    | 3 Div.                                                                               |

PCB design

|               |                   |
|---------------|-------------------|
| PCB thickness | 1.4 mm ... 1.8 mm |
|---------------|-------------------|

Material specifications

|                                        |                       |
|----------------------------------------|-----------------------|
| Color (Housing)                        | light gray (RAL 7035) |
| Flammability rating according to UL 94 | V0                    |
| Housing material                       | Polycarbonate         |
| Surface characteristics                | untreated             |

Environmental and real-life conditions

# BC 53,6 OT U22 KMGY - Upper housing part



2896429

<https://www.phoenixcontact.com/us/products/2896429>

## Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.15 mm (10 Hz ... 58.1 Hz) |
| Acceleration           | 2g (58.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |
| Test directions        | X-, Y- and Z-axis           |

## Glow-wire test

|                  |                        |
|------------------|------------------------|
| Specification    | IEC 60695-2-11:2014-02 |
| Temperature      | 850 °C                 |
| Time of exposure | 30 s                   |

## Mechanical strength / tumbling barrel

|                |                        |
|----------------|------------------------|
| Specification  | IEC 60068-2-31:2008-05 |
| Height of fall | 50 cm                  |
| Frequency      | 50                     |

## Shocks

|                                |                                   |
|--------------------------------|-----------------------------------|
| Specification                  | IEC 60068-2-27:2008-02            |
| Pulse shape                    | Half-sine                         |
| Acceleration                   | 15g                               |
| Shock duration                 | 11 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |

## Degree of protection (IP code)

|               |                                                   |
|---------------|---------------------------------------------------|
| Specification | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
|---------------|---------------------------------------------------|

## Ambient conditions

|                                         |                                                    |
|-----------------------------------------|----------------------------------------------------|
| Max. IP code to attain                  | IP20                                               |
| Ambient temperature (operation)         | -40 °C ... 105 °C (depending on power dissipation) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                   |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                   |
| Relative humidity (storage/transport)   | 95 %                                               |

## PCB data

|                       |                   |
|-----------------------|-------------------|
| Number of PCB holders | 6                 |
| Type of PCB mount     | Latching          |
| Thickness of the PCB  | 1.4 mm ... 1.8 mm |

## Mounting

|               |         |
|---------------|---------|
| Mounting type | Snap in |
|---------------|---------|

## Packaging specifications

# BC 53,6 OT U22 KMGY - Upper housing part



2896429

<https://www.phoenixcontact.com/us/products/2896429>

|                      |                     |
|----------------------|---------------------|
| Type of packaging    | packed in cardboard |
| Outer packaging type | Carton              |

# BC 53,6 OT U22 KMGY - Upper housing part


2896429

<https://www.phoenixcontact.com/us/products/2896429>



## Drawings

Dimensional drawing

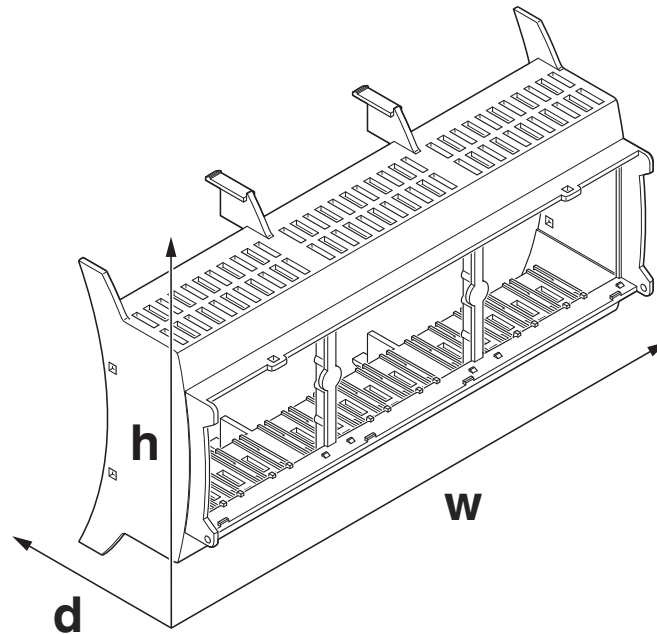

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

# BC 53,6 OT U22 KMGY - Upper housing part

2896429

<https://www.phoenixcontact.com/us/products/2896429>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2896429>



**UL Recognized**

Approval ID: E240868

# BC 53,6 OT U22 KMGY - Upper housing part



2896429

<https://www.phoenixcontact.com/us/products/2896429>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27182702 |
| ECLASS-13.0 | 27190603 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002779 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |