





Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

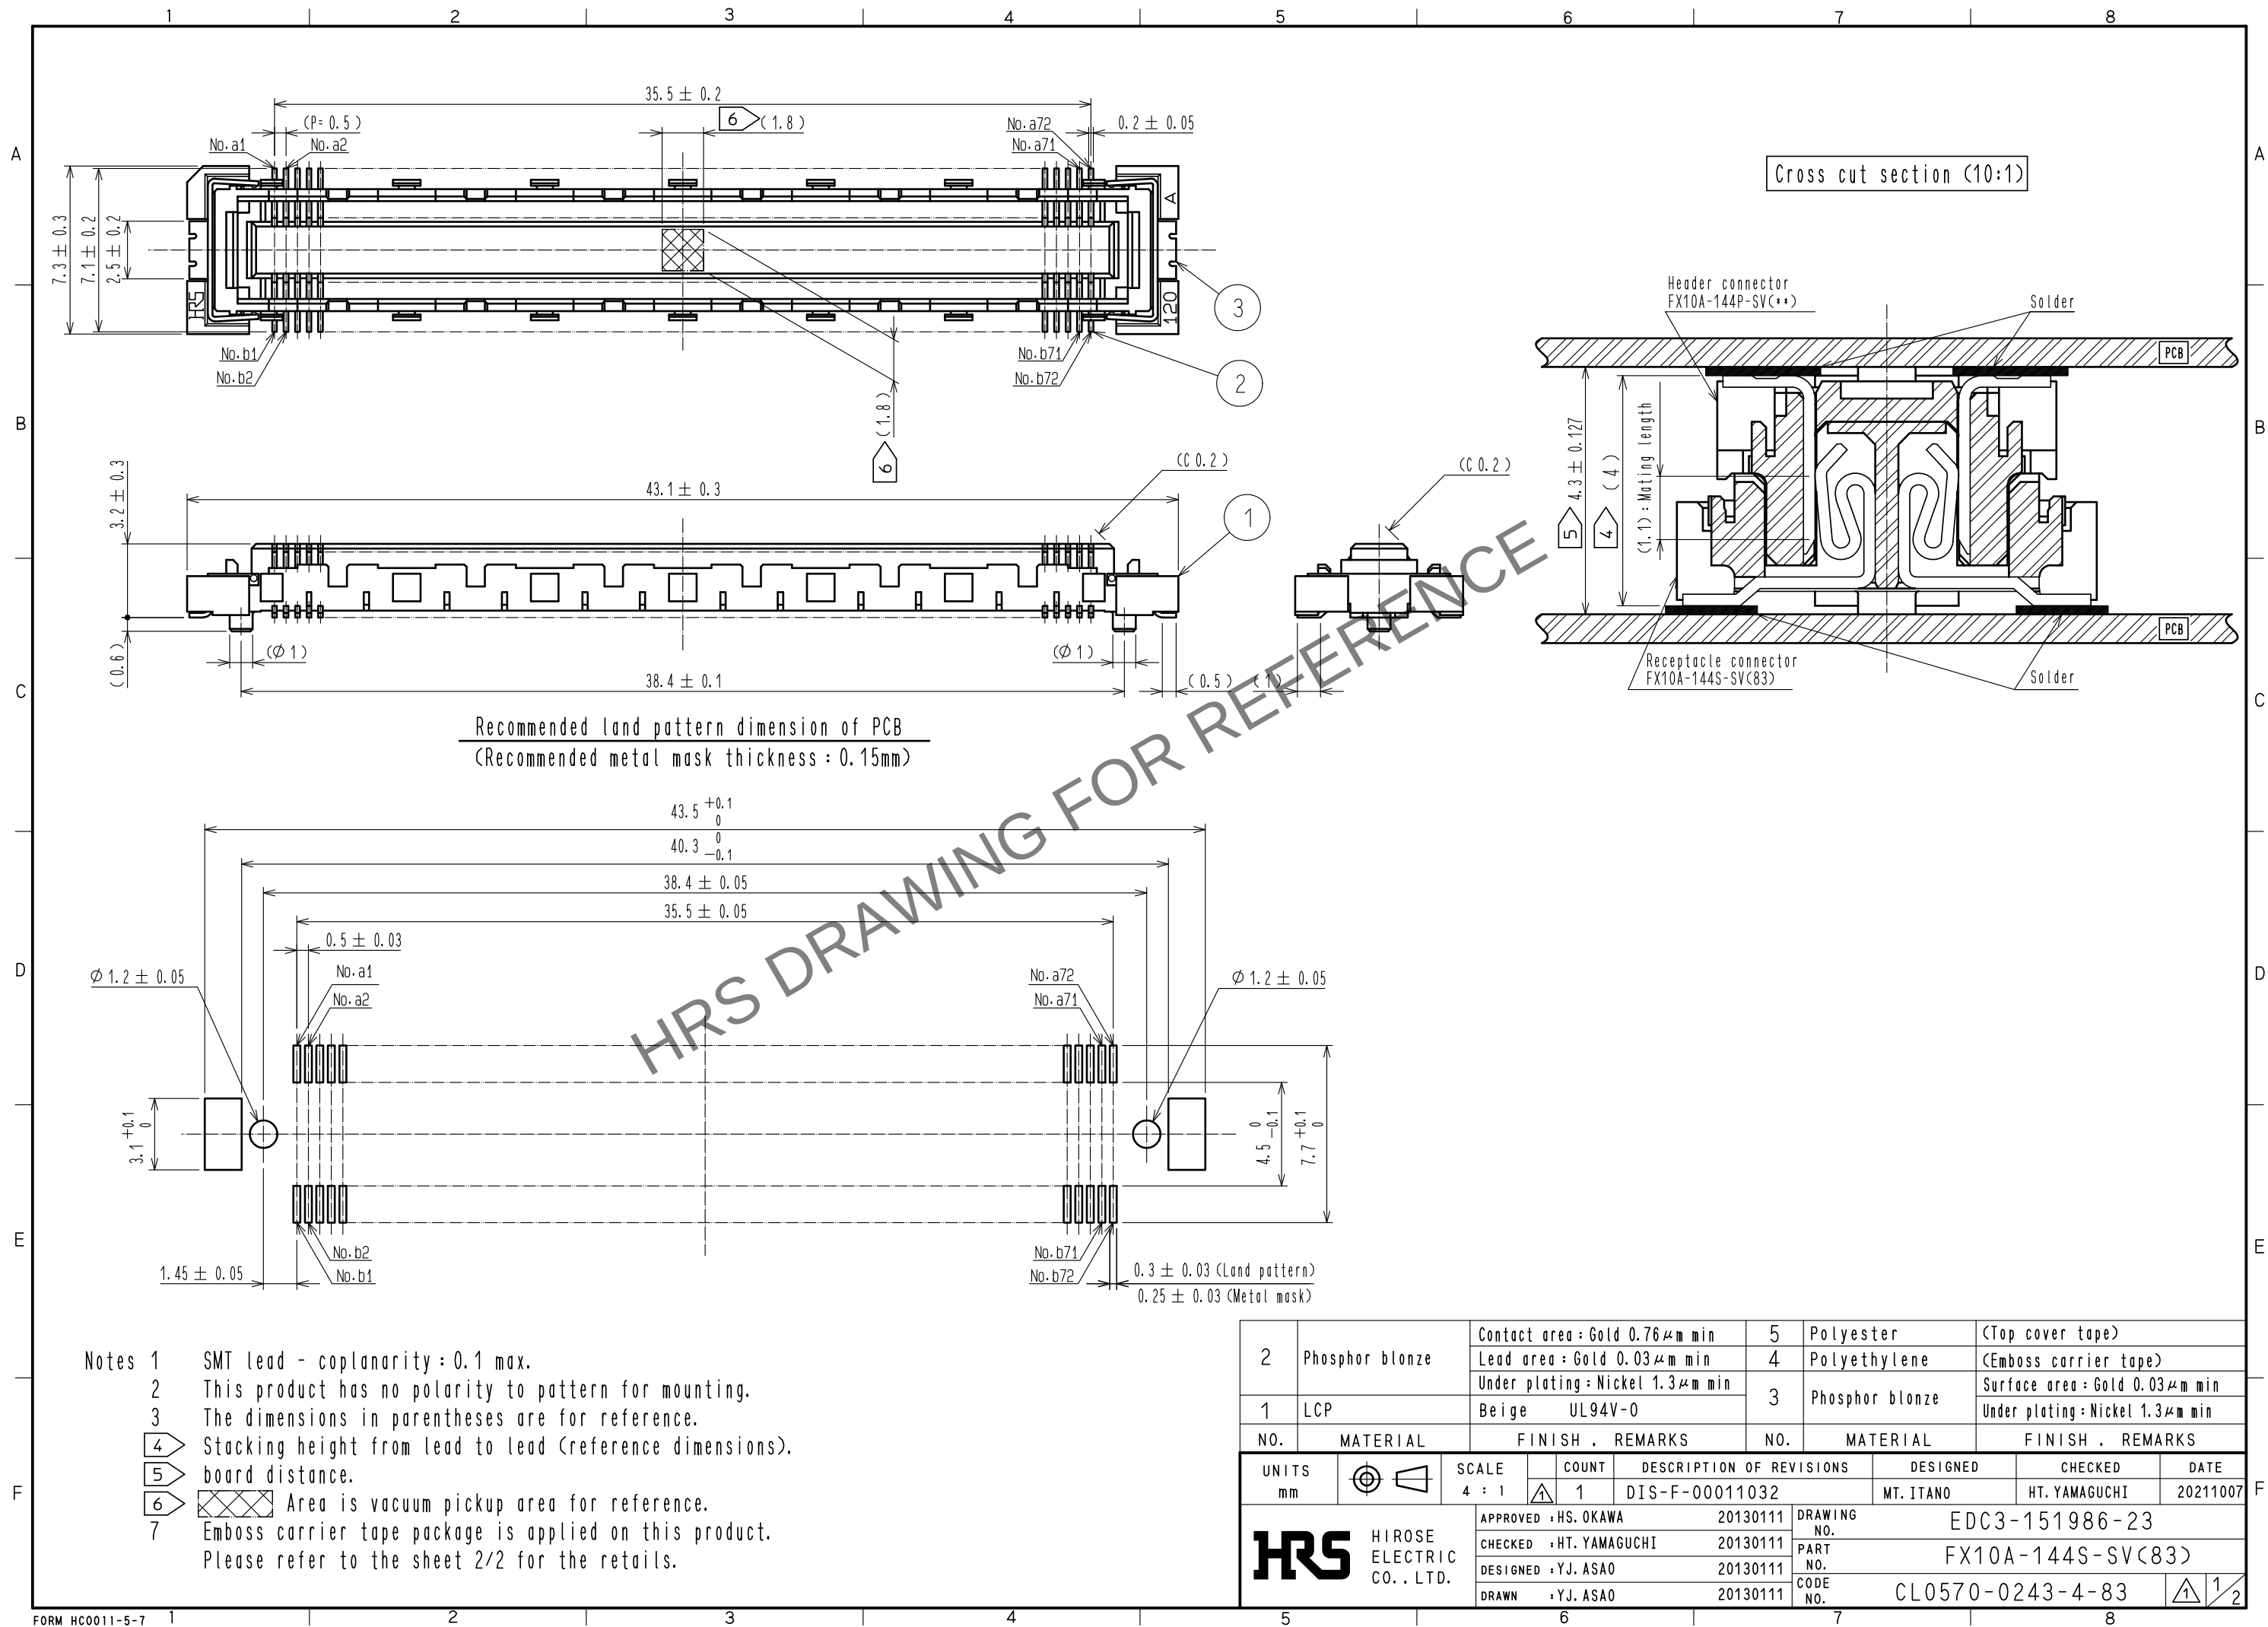

2	Phosphor blonze	Contact area : Gold $0.76\mu\text{m}$ min	5	Polyester	(Top cover tape)
		Lead area : Gold $0.03\mu\text{m}$ min	4	Polyethylene	(Emboss carrier tape)
		Under plating : Nickel $1.3\mu\text{m}$ min	3	Phosphor blonze	Surface area : Gold $0.03\mu\text{m}$ min
1	LCP	Beige UL94V-0			Under plating : Nickel $1.3\mu\text{m}$ min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 4 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00011032	
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	20130111	DRAWING NO.	EDC3-151986-23
		CHECKED : HT. YAMAGUCHI	20130111	PART NO.	FX10A-144S-SV(83)
		DESIGNED : YJ. ASAO	20130111	CODE NO.	CL0570-0243-4-83
		DRAWN : YJ. ASAO	20130111		
		DESIGNED	MT. ITANO	CHECKED	HT. YAMAGUCHI
		DATE	20211007		

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Drawing for packing (2:1)

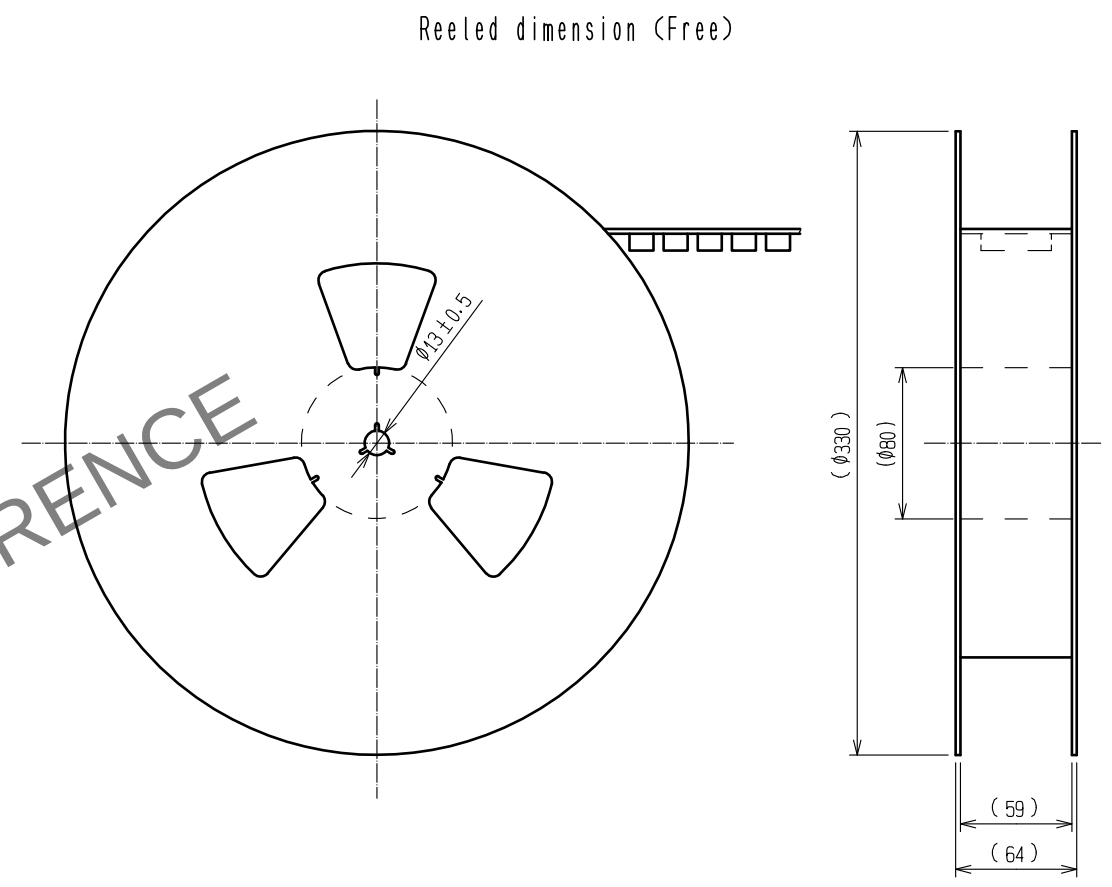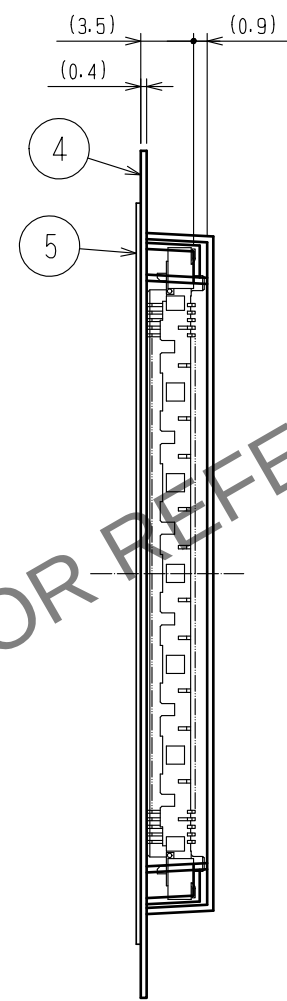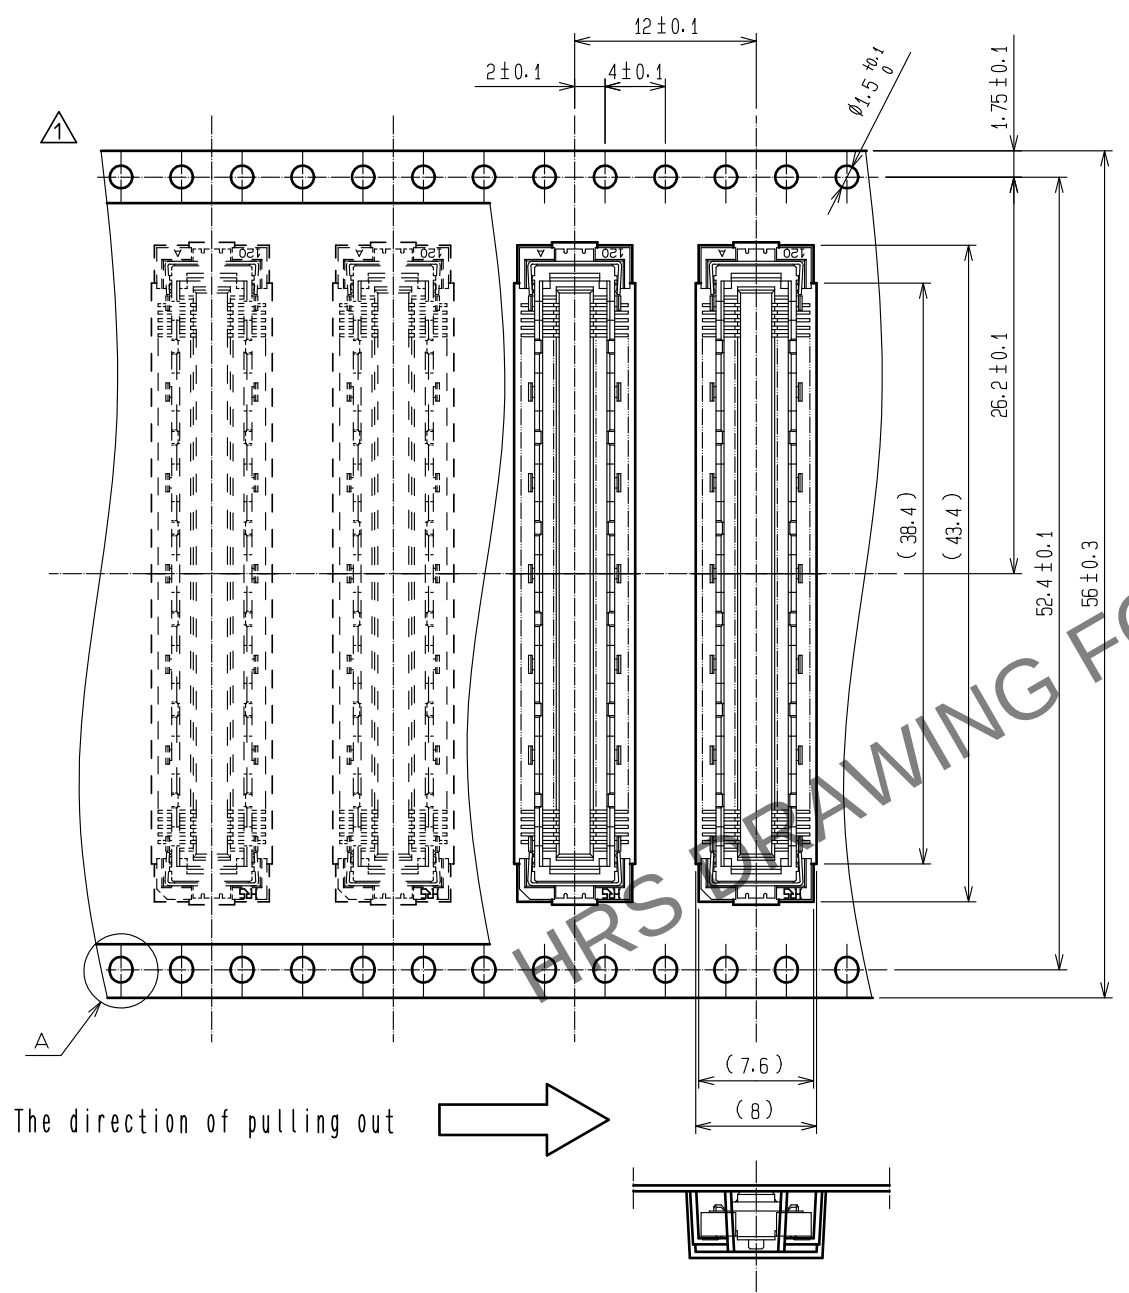

- Notes 8 1reel : 1,000 connectors.
9 Minimum 10 compartments from both reel ends remain empty.
10 This product has no polarity to tape and reel packaging.
11 The dimensions in parentheses are for reference.

HRS	DRAWING NO.	EDC3-151986-23
	PART NO.	FX10A-144S-SV(83)
	CODE NO.	CL0570-0243-4-83