
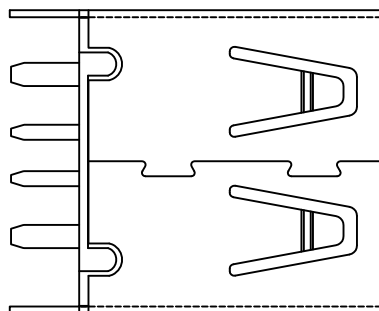
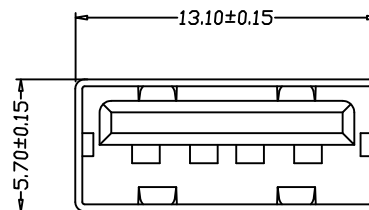
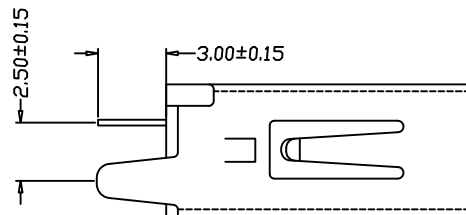


MAPX	MODIFICATION	DATE

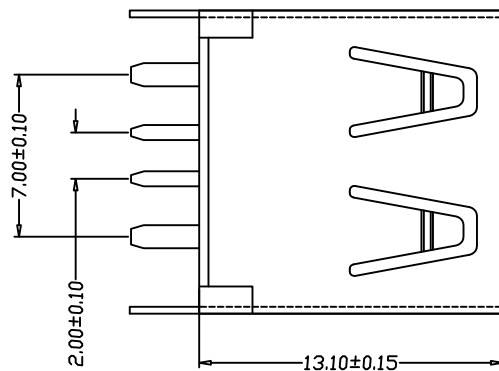

NOTES:

- HOUSING: WHITE, UL94V-0 .
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:

- Current rating: 5.0A Max
- CONTACT RESISTANCE: 30MΩ MAX
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
- INSULATION RESISTANCE: 1000MΩ MIN

2. MECHANICAL CHARACTERISTIC:


- INSERTION FORCE: 35N(3.57KGF) MAX
- EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
- DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
- 5000 CYCLES MIN
- 5000 CYCLES EXTRACTION FORCE: 3~35N

3. ENVIRONMENTAL:

- OPERATING TEMPERATURE: -55℃+85℃

4. Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U"
- 03: Selective Gold 5U"
- 04: Selective Gold 15U"
- 05: Selective Gold 30U"

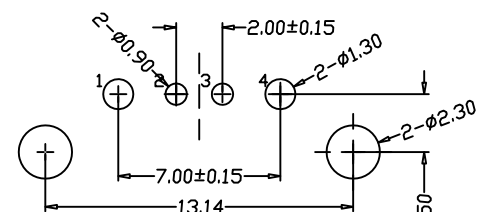

PCB LAYOUT

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B
X.	±0.25	X.	±5°	比例 SCALE	1:1	审核 CHKD	制图料号 PRODUCT PART NO
XX	±0.15	XX	±1°	日期 DATE	2014.07.24	核准 APPD	产品名称 PRODUCT NO
XXX	±0.10	XXX	±0.5°				AF大电流13.1直脚180度无边铜壳PBT白胶
				角法 VIEW		版本 VER	AD