

由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作

RoHS


MAPX

MODIFICATION

DRW

DATE

PCB板厚建议1.0~1.2MM

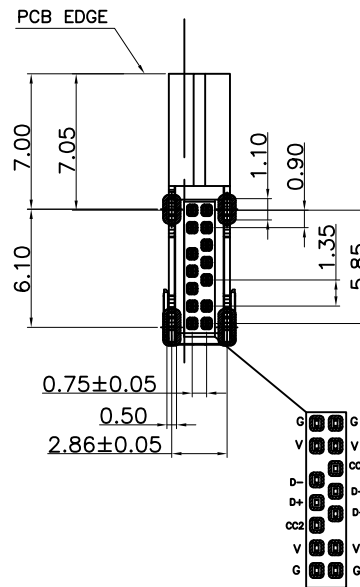

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTE :

1.Seletive Plating

- S1:5u" Gold In Contact Area
100u" Tin In Tail Area
- S2:0.8u" Gold In Contact Area
100u" Tin In Tail Area
- S3:10u" Gold In Contact Area
100u" Tin In Tail Area
- S4:15u" Gold In Contact Area
100u" Tin In Tail Area
- S5:30u" Gold In Contact Area
100u" Tin In Tail Area

4	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
3	CENTER PIECE	STAINLESS STEEL	—	NO Plated
2	TYPE C TERMINAL	COPPER ALLOY	—	Gold Plated
1	SHELL	STAINLESS STEEL	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司 Shenzhen Jing Tuo Jin Electronics Co., Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	918-518K2023D50002
X.	±0.35	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富
.XX	±0.10	.XX	±1.°	日期 DATE	2016-09-09	核准 APPD	黄国荣
.XXX	±0.05	.XXX	±0.5°	角法 VIEW		版本 VER	A0
						TYPE-C2.0侧插母座14.0前直后鱼叉脚不锈钢 LCP黑胶 14PIN端子1.3	