
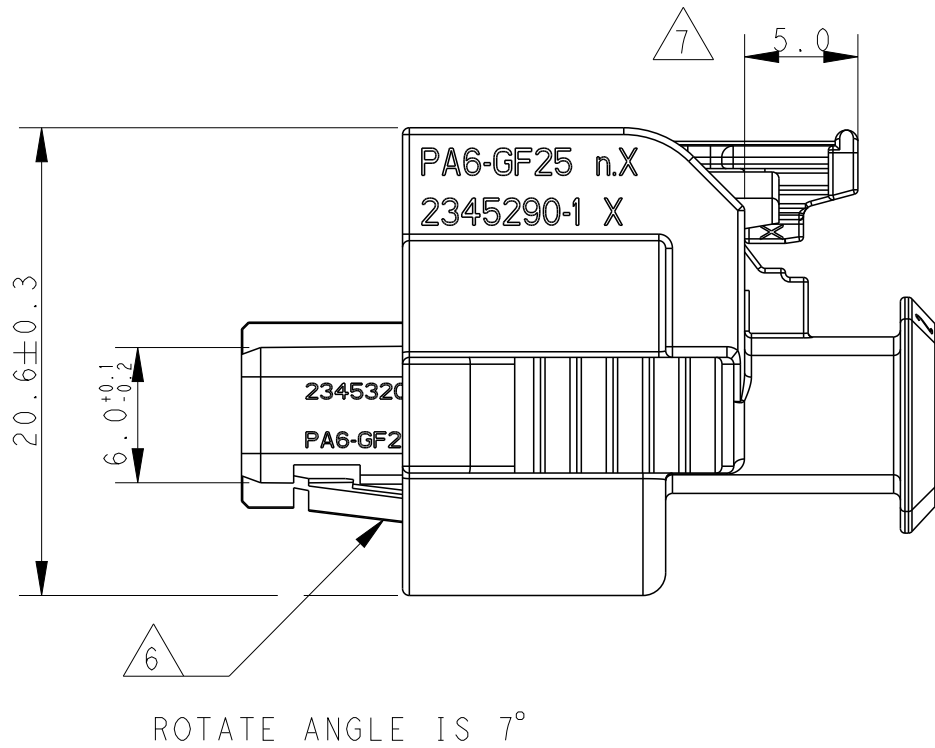
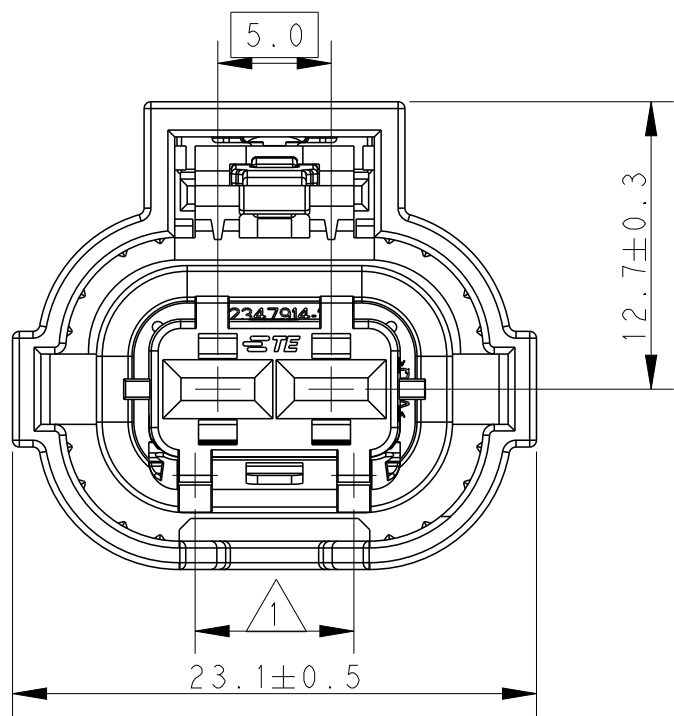
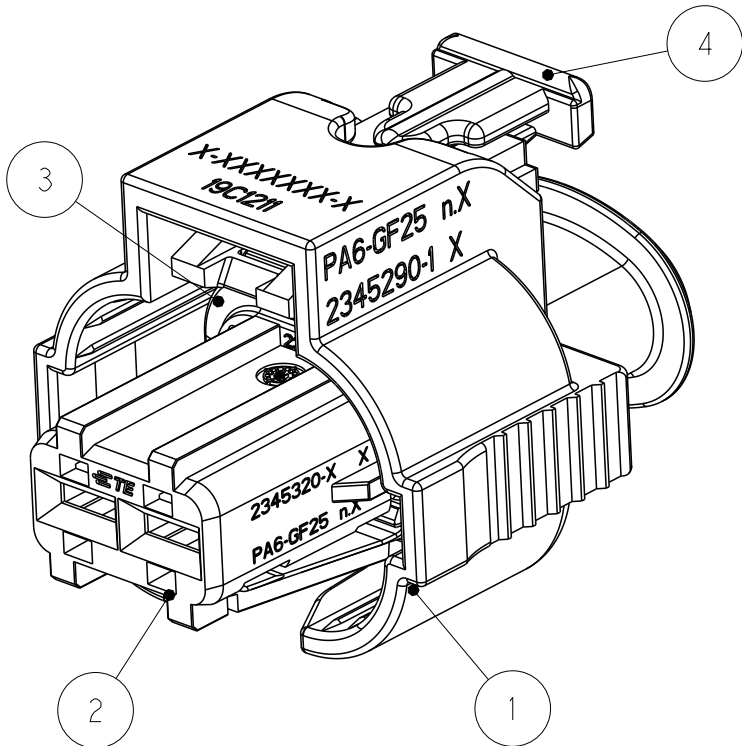


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISE DRAWING	12NOV2020	S.Z	I.Y
	C	REVISE DRAWING	09APR2022	S.Y	Z.Z
	D	ECN-23-209902	25APR2023	S.Y	Z.Z
	D1	ECN-23-219093	26JUN2023	S.Y	Z.Z

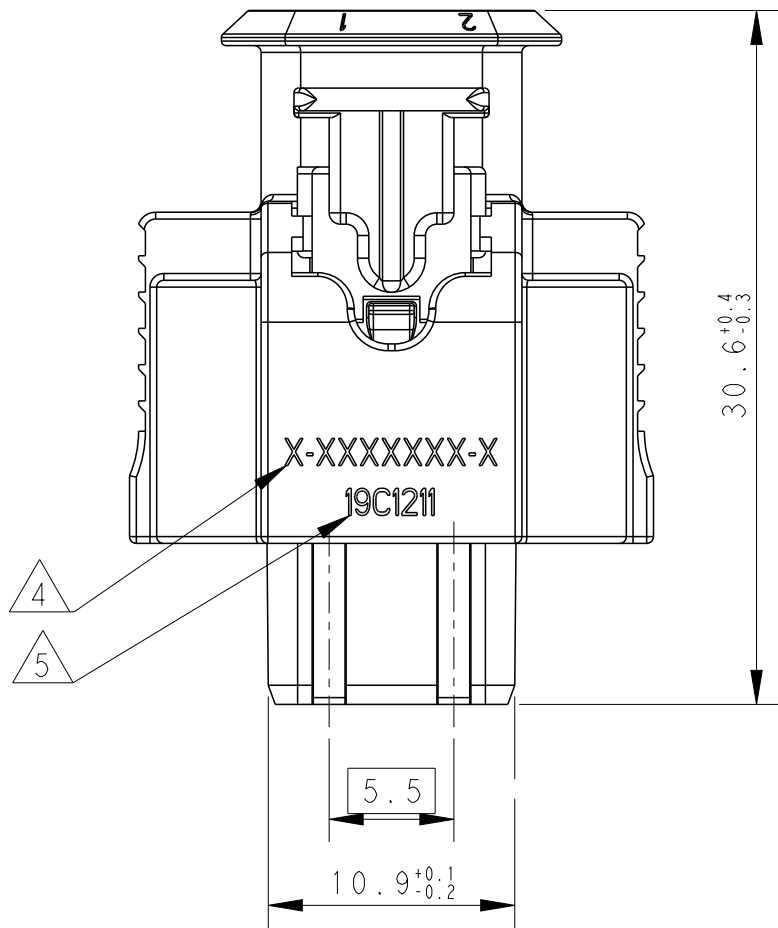

1. CODING IS AS FOLLOWS. SEE TABLE 1.

2. APPLIED RECEPTACLE CONTACT P/N:

DESCRIPTION	2.8mm SENSOR-FLAT RECEPTACLE OR EQUIVALENT
PART NO.	967542 OR EQU 967543 OR EQU
WIRE SIZE	0.5~1.0 >1.0~2.5

3. APPLIED WIRE SEAL P/N:

DESCRIPTION	SINGLE-WIRE SEAL (5mm HOLE)
PART NO.	828904 828905
INSULATION DIA. (Ø)	1.2~2.1mm 2.2~3.0mm

4. LASERPRINT MARK THE PRODUCT PART NUMBER. CHARACTER SIZE APPROX 1.2MM RAISE. CHARACTER LOCATION AND ORIENTATION AS SHOWN

5. LASERPRINT MARK DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY. YEAR: FIRST AND SECOND DIGITS (17=2017) MONTH: THIRD DIGIT, EXCLUDING 1, A=JAN, B=FEB, C=MARCH... (K=OCTOBER) DAY: FOURTH AND FIFTH DIGITS (14=14th DAY) HOUR: SIXTH AND SEVENTH DIGITS (11=11AM)

6. SUPPLY CONDITION: HINGE IN PRELOCKED POSITION

7. SUPPLY CONDITION: CPA IN PRELOCKED POSITION

TABLE 1

CODE 1: 2345388-1	CODE 11: 2345388-2

1	1	PC	RED	PA46-GF15	CPA	4
1	1	PC	GREEN	SILICON	INNER SEAL	3
1		PC	YELLOW	PA6-GF25	CODE 11	2
	1	PC	BLUE	PA6-GF25	CODE 1	2
1	1	PC	BLACK	PA6-GF25	HOUSING	1
-2	-1	U/M	COLOR	MATERIAL	DESCRIPTION	ITEM
D	D	REVISION OF EACH ASSY NO.				
4.4	4.4	WEIGHT OF EACH ASSY NO. [g]				
QTY PER ASSY		PARTS LIS				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHAO	26APR2019	TE Connectivity		
DIMENSIONS: mm		CHK E. JIANG	26APR2019			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±5 FINISH N/A		APVD I. YIN	26APR2019	NAME SEALED-2P-PLUG-ASSEMBLY (FLAT SENSOR CONNECTOR)		
MATERIAL SEE TABLE		PRODUCT SPEC 108-32584		SIZE A2		RESTRICTED TO -
		APPLICATION SPEC 114-160078		CAGE CODE C-2345388		REV D1
		WEIGHT -		DRAWING NO C-2345388		
		CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	