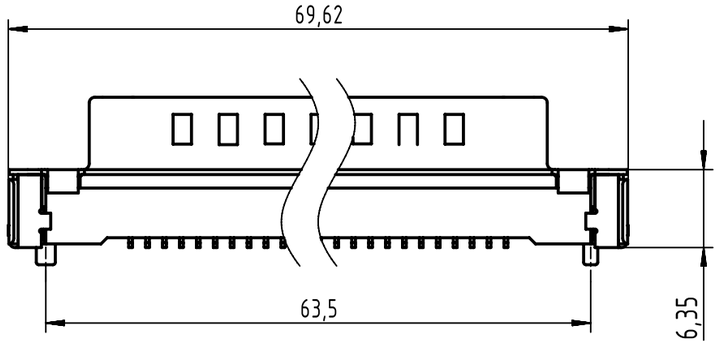



Load vacuum cover

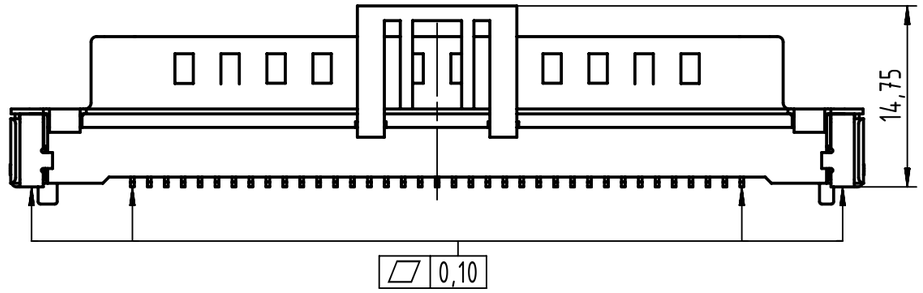

(All contacts and grounds)

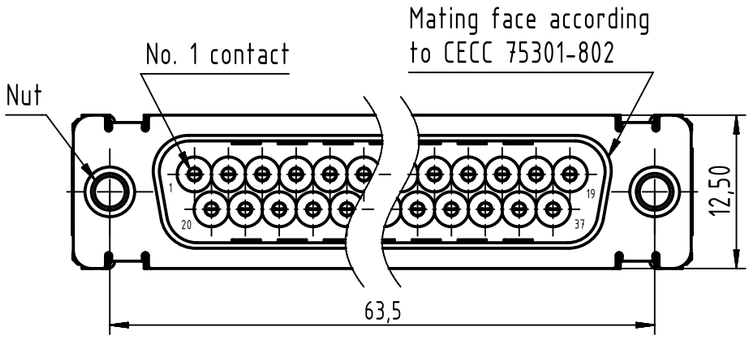



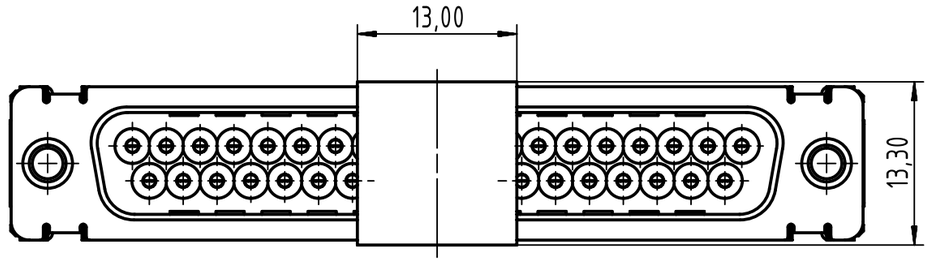

PCB layout, mounting side

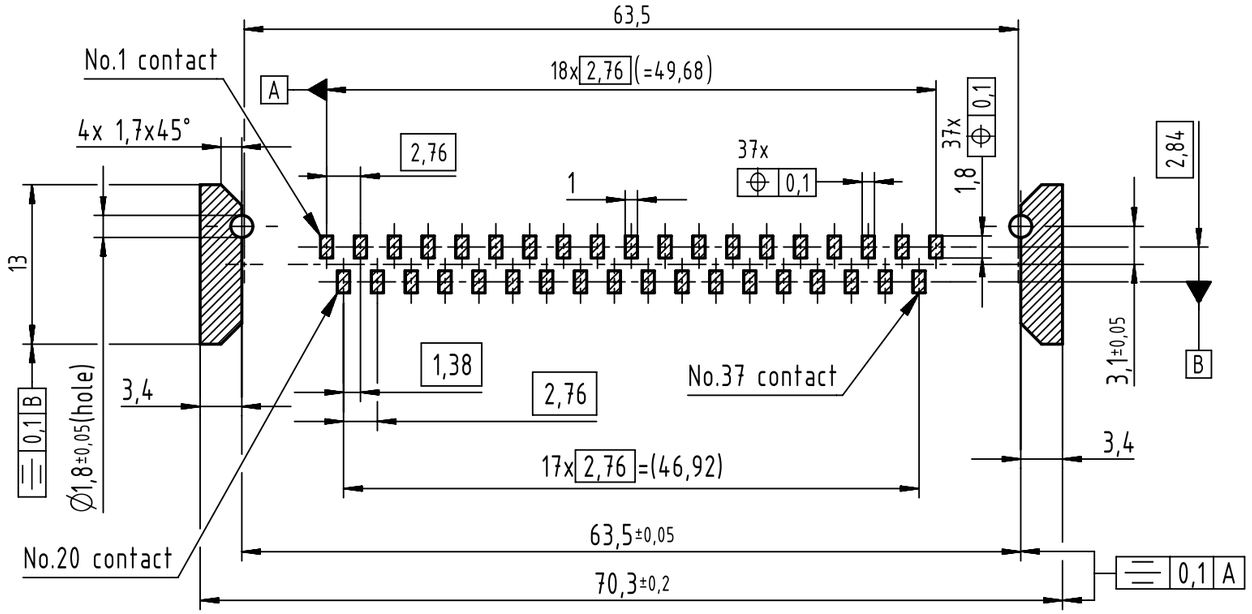

Max. Temperature: 260°C during 10 seconds.
Find further technical information on DS 09550200302.

0955 429 6812 333	2	4-40 UNC	Black insulator	Samples
0955 429 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 429 3812 741	1	4-40 UNC		
0955 429 6811 741	2	M3		
0955 429 6812741	2	4-40 UNC		
0955 429 7811 741	3	M3		
0955 429 7812 741	3	4-40 UNC		
Part number	PL	Nut	Index designation	

All Dimensions in mm
Original Size DIN A3

Scale 2:1

Free size tol.

Ref.

Sub.

All rights reserved

Department EC PD - CN

Created by	Inspected by	Standardisation	Date	State
ZHUANGJ	LUOK	HOFFMANN	2016-08-31	Final Release

Title D-Sub str SMT 37-pole male ass with nut and ground pad

Doc-Key / ECM-Nr. 100236648/UGD/001/C 500000107532

HARTING Electronics GmbH
D-32339 Espelkamp

Type TB

Number 0955429X81X

Rev. C

Page 1/1

Downloaded from Arrow.com.

A3