
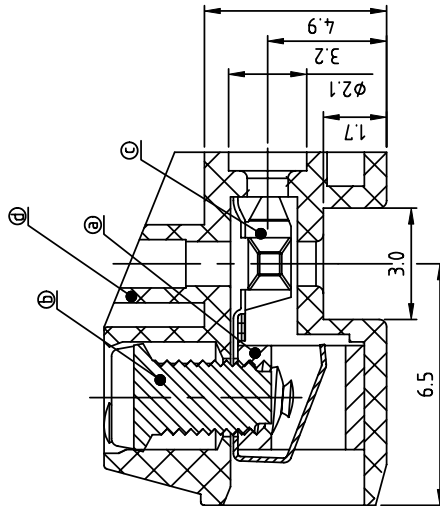
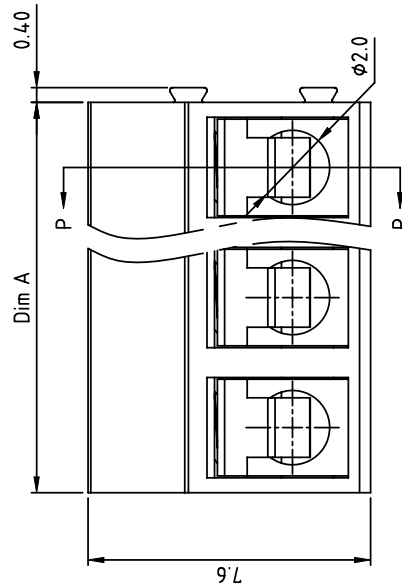


PRODUCT NUMBER	PITCH
EHxx21x000J0G	3.50 mm

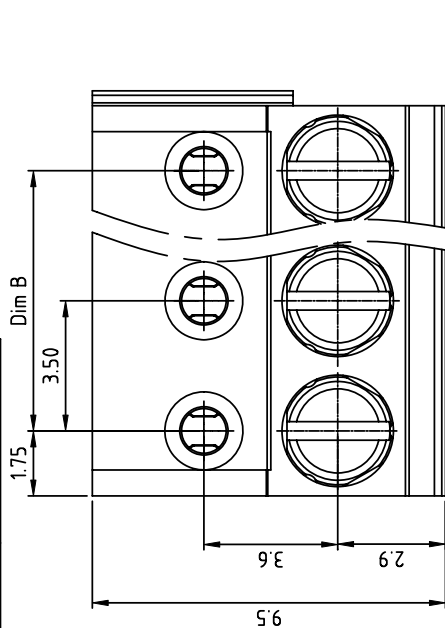

Section P-P

PART NO.: EH XX 21 x 0 00J0 G

N = Number of poles

Dim A=Nx3.5

Dim B=(N-1)x3.5

poles	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.25	±0.25
19-24p	±0.30	±0.25

End Stackable	Color	RoHS compliant
0	Black (RAL9005)	(lead<4%)
2	Red (RAL3007/D)	In copper Alloy
3	Orange(RAL2011/P)	
4	Yellow(RAL1018/A)	
5	Green(RAL6018/T)	
6	Blue (RAL5015/A)	
8	Grey(RAL7035/D)	
9	White(RAL1102)	
C	Green(RAL6018/U)	

Material:

- Item A Clamp: Brass(Cuzn) Ni plated
- Item B Terminal screw: Steel Zinc plating: " " slot type
- Item C Female contact: High conductivity copper
- Item D Terminal(housing): Thermoplastic (UL94V-0)

Electrica cULus

- Voltage rating: 150VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-28
- Stranded wire(AWG): 16-28
- Torque(Lb-In): 1.1
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

mat'l. code	surface	tolerance	projection	product family	TERMINAL BLOCK
litr	ecn	no	dr	date	title
					TERMINAL BLOCK
					PLUGGABLE, 1800 WIRE INLET, END STACKABLE
					dwg no
					sheet 1 of 1 size
					A4
					type
					CUSTOMER Drawing
sheet index	revision	A			
	sheet	1			