

6


5

4

2 3

1



view shown without grounding and plastic pin

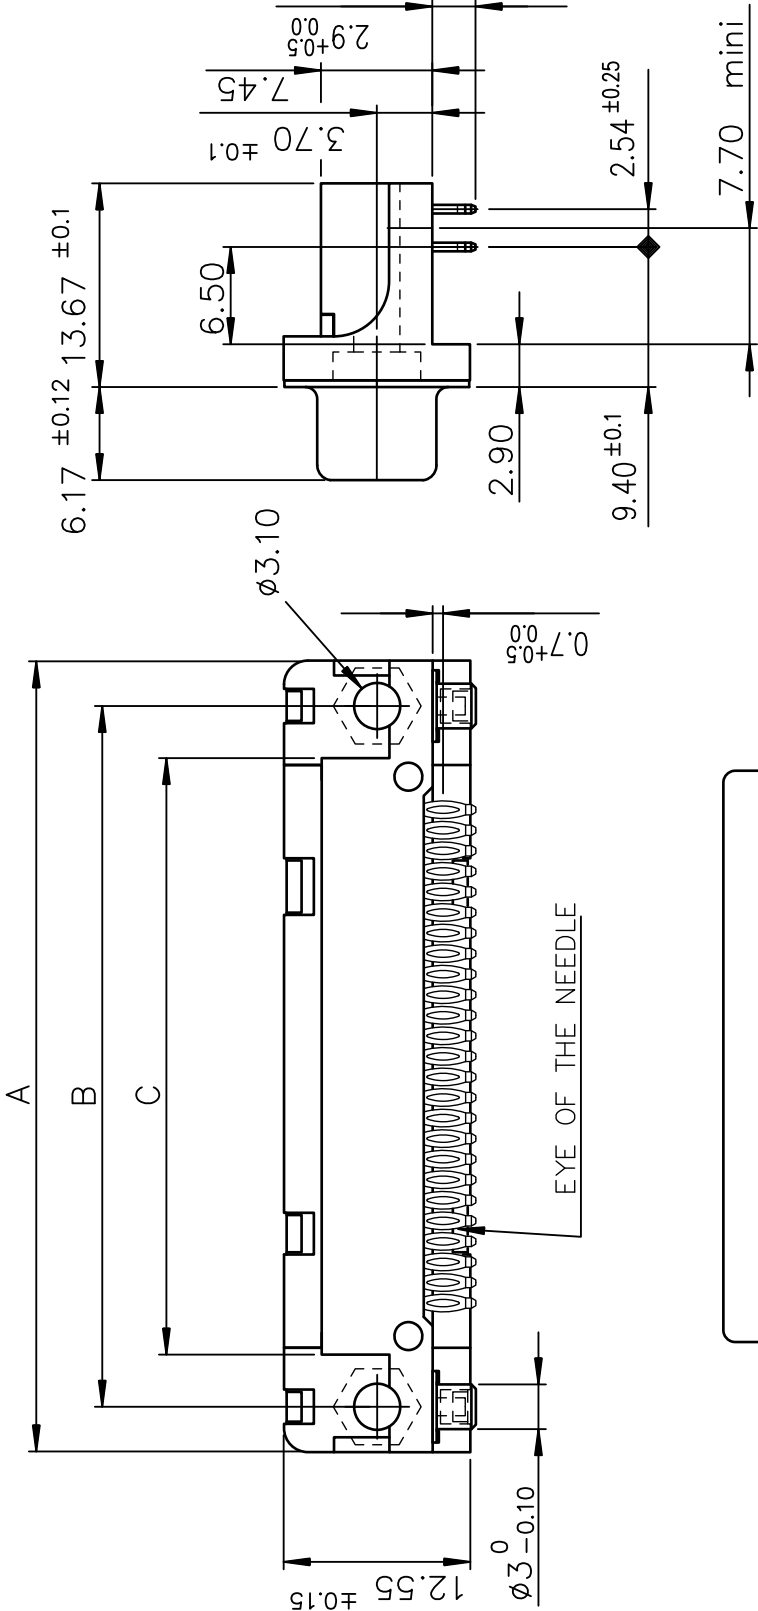

PITCH ±0.25

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.25 mm)

Detail of grounding strip

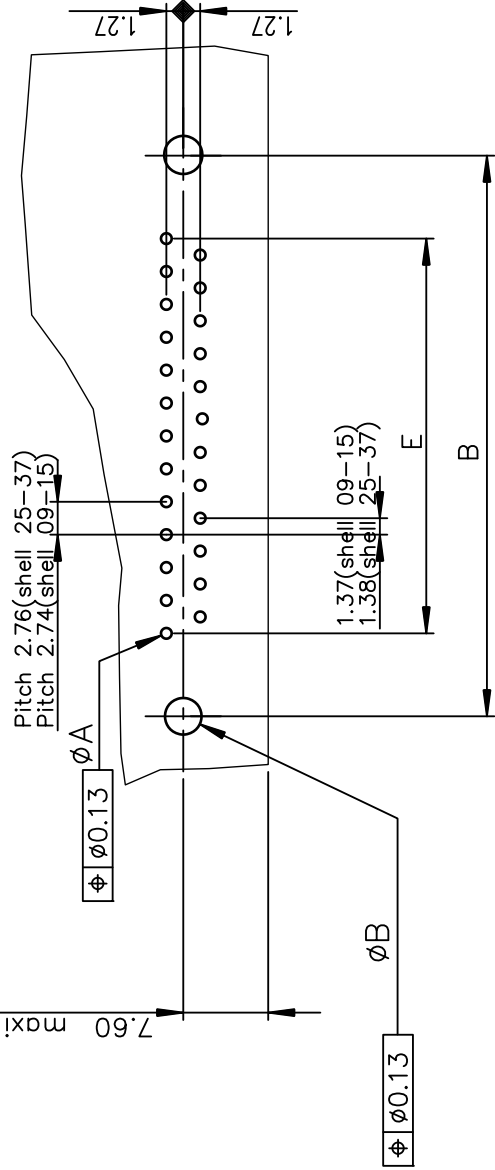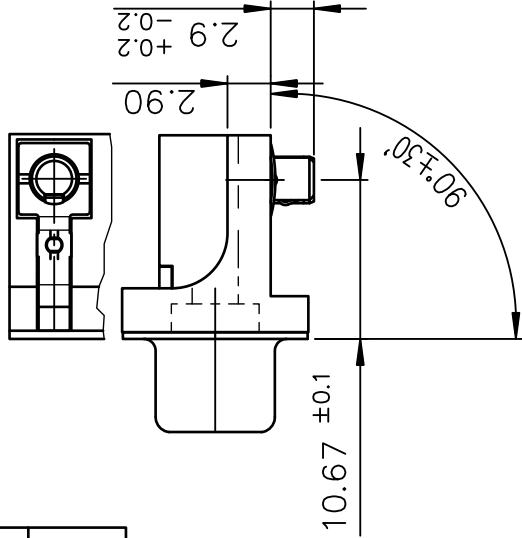

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S82C4GX00	D09S82C6GX00
15	39.14	33.32	26.32	24.54	19.18	D15S82C4GX00	D15S82C6GX00
25	53.03	47.04	40.04	38.25	33.12	D25S82C4GX00	D25S82C6GX00
37	69.32	63.50	56.50	54.71	49.68	D37S82C4GX00	D37S82C6GX00
TIN LEAD PART NUMBER						Gold flash	0.76 μ gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S82C4GX00LF	D09S82C6GX00LF
15	39.14	33.32	26.32	24.54	19.18	D15S82C4GX00LF	D15S82C6GX00LF
25	53.03	47.04	40.04	38.25	33.12	D25S82C4GX00LF	D25S82C6GX00LF
37	69.32	63.50	56.50	54.71	49.68	D37S82C4GX00LF	D37S82C6GX00LF
LEAD FREE PART NUMBER						Gold flash	0.76 μ gold

6

5

4

3

2

1