

IMPACT

TE Internal #: 2007827-1

192 Position, Mating Alignment, Keyed Mating Alignment Type, 12

Row, 16 Column, PCB Mount Header, Vertical, IMPACT, High


Speed Backplane Connectors

View on TE.com >




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



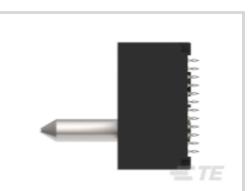







Number of Positions: 192

Row-to-Row Spacing: 1.35 mm [.053 in]

Mating Alignment: With

Mating Alignment Type: Keyed

Number of Rows: 12

Features

Product Type Features

Signal Arrangement	Differential
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Fully Shrouded
Configuration Features	
Number of Ground Positions	64
Number of Pairs	64
Stackable	No
Number of Signal Positions	128
Number of Positions	192
Number of Rows	12
Number of Columns	16
PCB Mount Orientation	Vertical



Guide Location	Left		
Electrical Characteristics			
Impedance	100 Ω		
Operating Voltage	30 VAC		
Signal Characteristics			
Number of Differential Pairs per Column	4		
Data Rate	20 – 25 Gb/s		
Body Features			
Primary Product Color	Black		
Contact Features			
Contact Mating Area Length	4.5 mm[.177 in]		
PCB Contact Termination Area Plating Material Thickness	.76 – 1.52 μm[30 – 60 μin]		
Contact Layout	Inline		
Contact Type	Pin		
Contact Underplating Material Thickness	1.27 μm[50 μin]		
Contact Mating Area Plating Material Thickness	.76 μm[29.92 μin]		
Contact Mating Area Plating Material	Gold		
PCB Contact Termination Area Plating Material Finish	Matte		
Contact Shape & Form	Dual Beam		
Contact Underplating Material	Nickel		
PCB Contact Termination Area Plating Material	Tin		
Contact Base Material	Copper Alloy		
Contact Current Rating (Max)	.75 A		
Termination Features			
Termination Post & Tail Length	1.4 mm[.055 in]		
Termination Method to PCB	Through Hole - Press-Fit		
Mechanical Attachment			
Guide Hardware	With		
Mating Retention	Without		
PCB Mount Retention	With		
PCB Mount Retention Type	Action/Compliant Tail & Screw		
Mating Alignment	With		



Mating Alignment Type	Keyed		
Connector Mounting Type	Board Mount		
Housing Features			
Number of Shrouded Sides	3		
End Wall Location	Right		
Housing Material	LCP - GF (Liquid Crystal Polymer)		
Centerline (Pitch)	1.9 mm[.075 in]		
Dimensions			
Connector Length	38.3 mm[1.508 in]		
Connector Height	24.6 mm[.969 in]		
Connector Width	20.8 mm[.819 in]		
PCB Thickness (Recommended)	1 mm		
PCB Hole Diameter	.39 mm[.015 in]		
Row-to-Row Spacing	1.35 mm[.053 in]		
Usage Conditions			
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]		
Operation/Application			
Circuit Application	Signal		
Industry Standards			
Compatible With Approved Standards Products	CSA Certified, UL E28476		
UL Flammability Rating	UL 94V-0		
Packaging Features			
Packaging Method	Box & Tube, Tube		

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241)



\square	n 0 +	aantain	REACH	CV/IIC
DOES	$\Gamma(C)$	contain	KFAU.H	$\Sigma V \square U$

Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | IMPACT

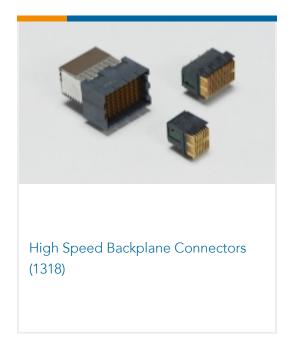

Customers Also Bought










TERMINAL, PIDG R 16-14 6

TE Part #284514-2
2 POS TERMI-BLOK HDR DIR. POL.

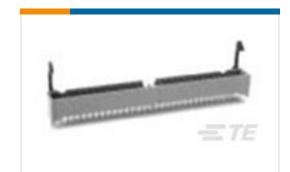

TE Part #2-1761713-3
IDC LOW PRO HDR 10P VERT SHT L



TE Part #2305018-2 USB TYPE C, REC IPX8 ON BOARD DUAL SMT









Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2007827-1_A_c-2007827-1-a.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2007827-1_A_c-2007827-1-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2007827-1_A_c-2007827-1-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

7-1773458-1_IMPACT_BACKPLANE_CONNECTOR_SYSTEM_CATALOG

English

Product Specifications

192 Position, Mating Alignment, Keyed Mating Alignment Type, 12 Row, 16 Column, PCB Mount Header, Vertical, IMPACT, High Speed Backplane Connectors



Application Specification

English

Agency Approvals

Agency Approval Document

English