### **PIDG**

TE Internal #: 2-320630-2


Closed Ring Tongue Terminal, 16 – 14 AWG, #10 Stud Size, 4.82 mm [.19 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially

Insulated

View on TE.com >



Terminals & Splices > Ring Terminals > PIDG Ring Tongue Terminals

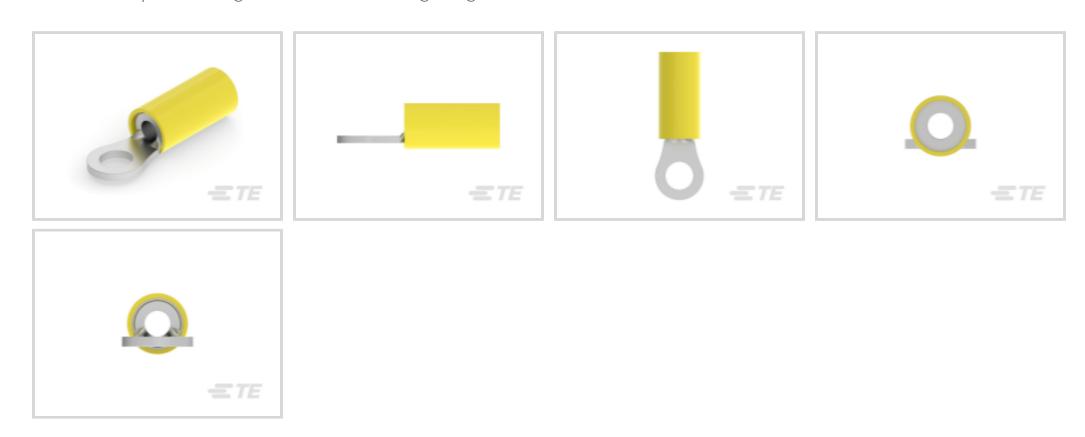

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: #10

All PIDG Ring Tongue Terminals (411)

### **Features**

### Product Type Features

Terminal Features	Heavy Duty
Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#10
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Stripe Color	Black
Product Weight	2.306 g
Contact Features	



Barrel Type	Closed	
Terminal Orientation	Straight	
Terminal Plating Material	Tin	
Mechanical Attachment		
Wire Insulation Support	With	
Dimensions		
Wire Size	2050 – 5180 CMA	
Stud Diameter	4.82 mm[.19 in]	
Tongue Thickness	.79 mm[.031 in]	
Product Length	26.57 mm[1.046 in]	
Compatible Insulation Diameter (Max)	5.84 mm[.23 in]	
mpatible Insulation Diameter Range 3.81 – 5.84 mm[.15 – .23 in]		
Usage Conditions		
	Partially Insulated	
Usage Conditions	Partially Insulated  105 °C[221 °F]	
Usage Conditions  Insulation Option		
Usage Conditions  Insulation Option  Operating Temperature Range		
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application	105 °C[221 °F]	
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application  Compatible With Wire Base Material	105 °C[221 °F]  Copper	
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material	105 °C[221 °F]  Copper	
Usage Conditions Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Industry Standards	105 °C[221 °F]  Copper  Tin	
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material  Industry Standards  Government Qualified Terminal	105 °C[221 °F]  Copper  Tin	

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241)



		REACH	CV/II/C
$n \cap T$	CONTAIN	RFA( H	$\sim VH($

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per
	homogenous material. Also BFR/CFR/PVC
	Free

### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**







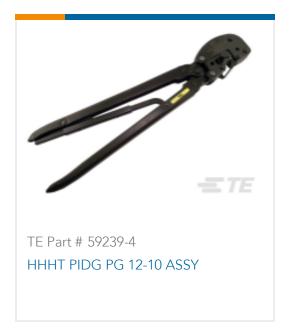







Also in the Series | PIDG





Compression Connectors(17)



Crimp Wire Pins, Tabs & Ferrules(41)



Hand Crimping Tools(2)




Knife Disconnects(11)



Quick Disconnects(32)



Ring Terminals(589)

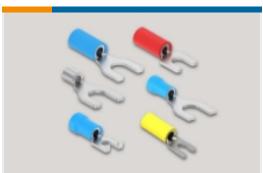

Spade Terminals(228)



Special Purpose Terminals(1)



Splices(39)

# Customers Also Bought



TE Part #52945 PIDG TERM. SPR SPD 12-10 1/4



TE Part #3-644042-8
08P MTA100 CONN ASSY LF



TE Part #2-328999-1 PIDG 16-14 R 3/8; TAPE



TE Part #1-745491-6 09 HDE MS RCPT,26-30,LEAD FREE



TE Part #320743
TERMINAL, SOLIS R 4 7/16



TE Part #53831-1 SOLIS SP SPD 22-16COM22-18MIL8



TE Part #350537-7 UMNL SOK 20-14 .0126 AUNI/BR



TE Part #66424-8
III+ SKT,30-26,30AU/FL,STRIP





### **Documents**

### **Product Drawings**

TERMINAL, PIDG R 16-14HD 10

English

### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-320630-2\_P.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-320630-2\_P.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-320630-2\_P.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Agency Approvals

**UL Report** 

English