

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Universal varistor-based plug-in lightning/surge arrester for 48 V DC applications with grounded return conductor (positive pole), without risk assessment for Lightning Protection Levels III and IV, with remote indication contact.



Your advantages

- Dual-channel, panel mountable surge protective device
- Orthogonal mounting orientation to plug
- Base element with floating remote indication contact
- Rack-mount 1U panel applications

Commercial data

Item number	2907042
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	NULL
Product key	CL1151
GTIN	4055626248974
Weight per piece (including packing)	251.16 g
Weight per piece (excluding packing)	251.16 g
Customs tariff number	85363030
Country of origin	DE

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

Technical data

Product properties

Product type	Arrester combination
Product family	VALVETRAB MS
IEC test classification	I / II
	T1 / T2
	I
EN type	T1 / T2
IEC power supply system	TN-S
Type	DIN rail module, two-section, divisible
Surge protection fault message	Optical, remote indicator contact

Insulation characteristics

Pollution degree	2
------------------	---

Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	5 V AC ... 250 V AC
	125 V AC (UL)
	125 V DC (200 mA DC)
Operating current	5 mA AC ... 1.5 A
	1 A (UL)
	1 A (30 V DC)

Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	2.5 Nm ... 3 Nm
	22 lb _F ·in. ... 26.5 lb _F ·in. (UL)
Stripping length	16 mm
Conductor cross section flexible min.	1.5 mm ²
Conductor cross section flexible max.	25 mm ²
Conductor cross section, rigid min.	1.5 mm ²
Conductor cross section, rigid max.	35 mm ²
Conductor cross section flexible	1.5 mm ² ... 25 mm ²
Conductor cross section rigid	1.5 mm ² ... 35 mm ²
Conductor cross section AWG	15 ... 2
	10 ... 2 (UL)

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2




2907042

<https://www.phoenixcontact.com/us/products/2907042>

Remote fault indicator contact

Connection method	Push-in spring connection
Stripping length	6 mm
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	0.5 mm ²
Conductor cross section, rigid min.	0.14 mm ²
Conductor cross section, rigid max.	0.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 0.5 mm ²
Conductor cross section rigid	0.14 mm ² ... 0.5 mm ²
Conductor cross section AWG	24 ... 20 (UL)

Dimensions

Dimensional drawing	
Width	70.6 mm
Height	40.6 mm
Height unit	1 U
Depth	98.1 mm
Horizontal pitch	4 Div.

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V-0
Housing material	PA 6.6
	PBT

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Mode of protection	L-PE
	N-PE
Direction of action	N-PE
	L-PE
Nominal voltage U_N	60 V AC ± 10 % (TN-S)
	-48 V DC ± 10 % (RRH)
Nominal frequency f_N	50 Hz (60 Hz)

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

Maximum continuous voltage U_C	75 V AC
	100 V DC
Rated load current I_L	80 A
Residual current I_{PE}	≤ 0.6 mA
Standby power consumption P_C	≤ 45.00 mVA
Nominal discharge current I_n (8/20) μ s	12.5 kA
Maximum discharge current I_{max} (8/20) μ s	30 kA
Impulse discharge current (10/350) μ s, charge	6.25 As
Impulse discharge current (10/350) μ s, specific energy	39 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	12.5 kA
Total discharge current I_{total} (8/20) μ s	50 kA
Short-circuit current rating I_{SCCR}	25 kA
Voltage protection level U_p	≤ 0.4 kV
Residual voltage U_{res}	≤ 0.4 kV (at I_n)
	≤ 0.35 kV (at 10 kA)
	≤ 0.3 kV (at 5 kA)
	≤ 0.275 kV (at 4 kA)
	≤ 0.25 kV (at 3 kA)
TOV behavior at U_T	100 V AC (5 s / withstand mode)
	130 V DC (5 s / withstand mode)
Response time t_A	≤ 25 ns
Max. backup fuse with V-type through wiring	80 A AC (gG - 16 mm ²)
Max. backup fuse with branch wiring	160 A AC (gG)

Additional technical data

Maximum discharge current I_{max} (8/20) μ s	65 kA
--	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (Half-sine / 11 ms / 3x $\pm$ X, $\pm$ Y, $\pm$ Z)
Vibration (operation)	7.5g (10 ... 500 Hz / 2.5 h / X, Y, Z)

Approvals

UL specifications

Maximum continuous operating voltage MCOV (L-N)	75 V AC
	100 V DC
	L-G

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

Mode of protection	L-G
	(L+) - (L-)
	(L+) - G
	(L-) - G
Nominal voltage	60 V DC
SPD Type	1CA

UL indicator/remote signaling

Operating voltage	125 V AC
AC operating current	1 A AC

UL connection data

Tightening torque	30 lb _F ·in.
Conductor cross section AWG	10 ... 2

Mounting

Mounting type	Panel mount
---------------	-------------

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2




2907042

<https://www.phoenixcontact.com/us/products/2907042>

Drawings

Circuit diagram

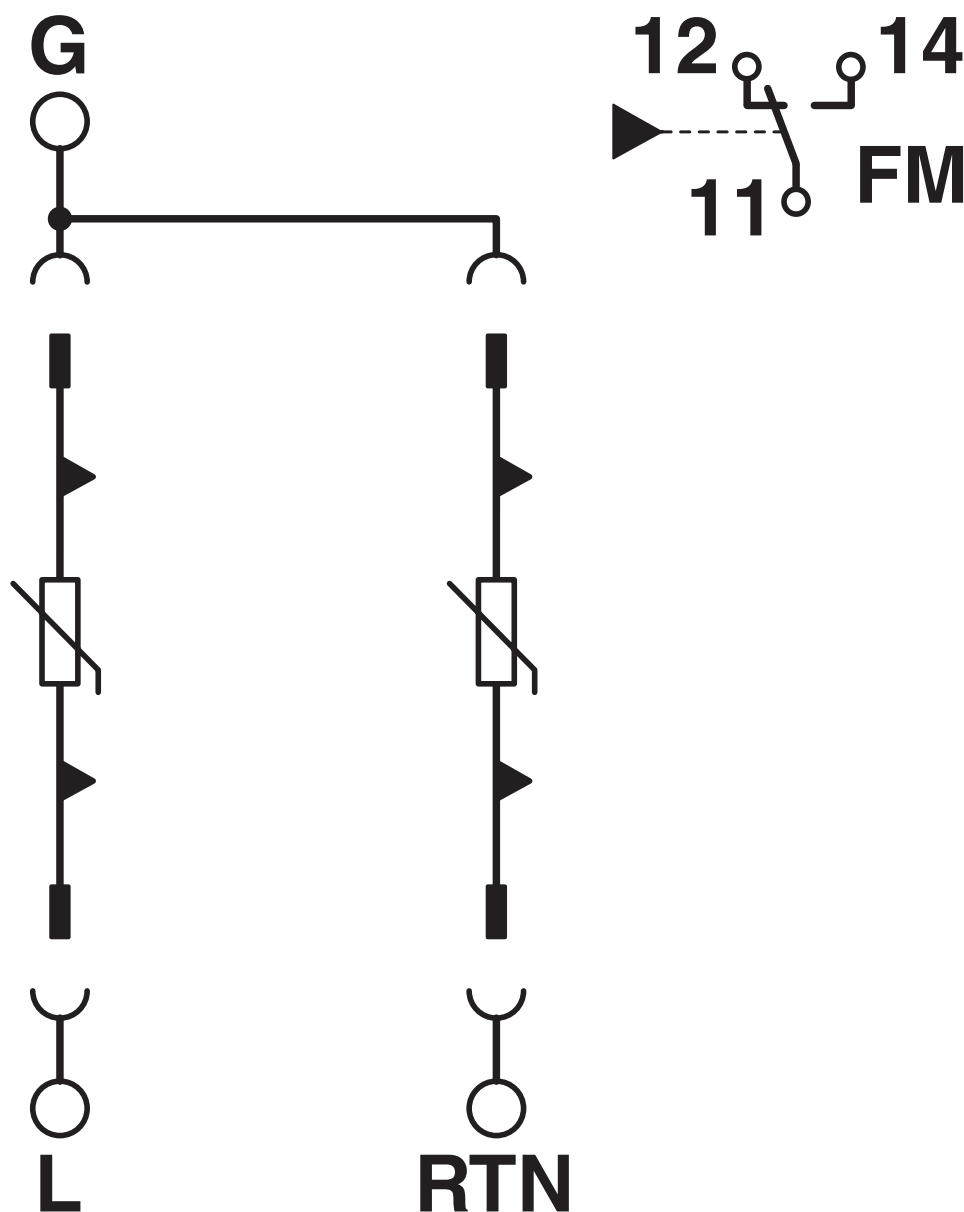


VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2


2907042

<https://www.phoenixcontact.com/us/products/2907042>

Drilling plan/solder pad geometry

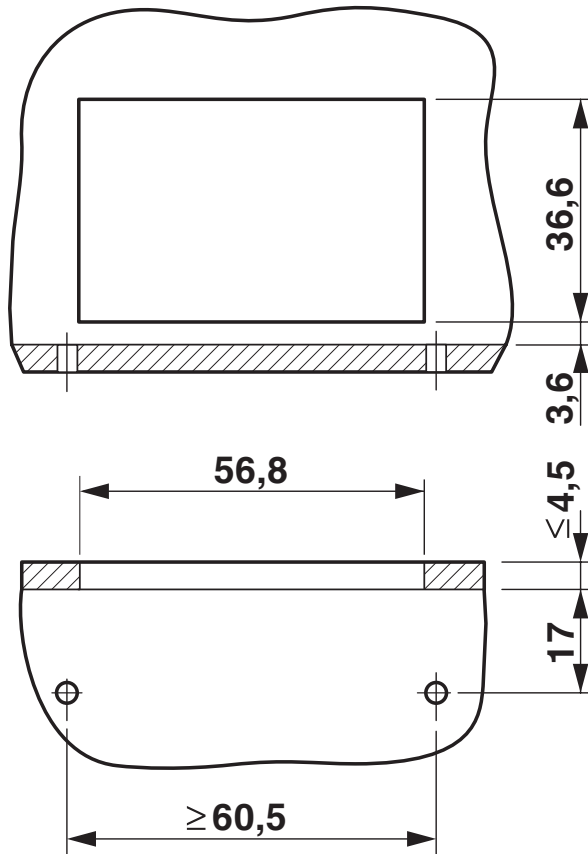

Dimensional drawing

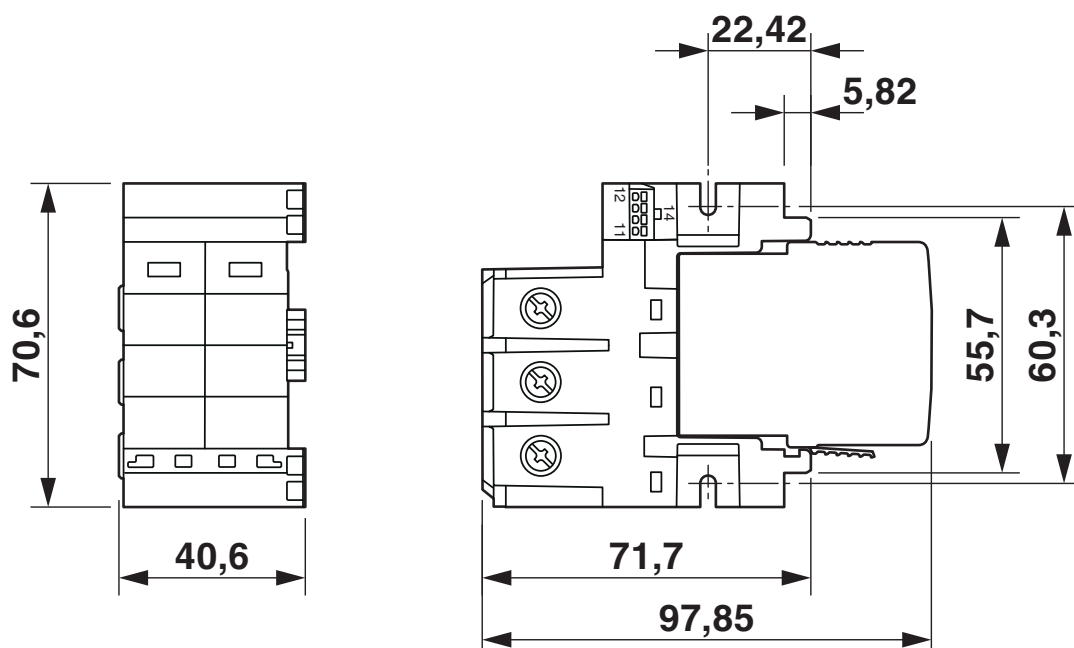

2907042
<https://www.phoenixcontact.com/us/products/2907042>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2907042>



cUL Recognized
Approval ID: FILE E 330181



UL Recognized
Approval ID: FILE E 330181

UAE-RoHS
Approval ID: 23-10-88705

cULus Recognized

2907042
<https://www.phoenixcontact.com/us/products/2907042>

Classifications

ECLASS

ECLASS-11.0	27130802
ECLASS-13.0	27171201

ETIM

ETIM 9.0	EC000381
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

2907042
<https://www.phoenixcontact.com/us/products/2907042>

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

Accessories

ZBN 18,LGS:ERDE - Marker for terminal blocks

2749589

<https://www.phoenixcontact.com/us/products/2749589>



Marker for terminal blocks, Strip, white, labeled, horizontal: Grounding symbol, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

ZBN 18,LGS:L1-N,ERDE - Marker for terminal blocks

2749576

<https://www.phoenixcontact.com/us/products/2749576>



Marker for terminal blocks, Strip, white, labeled, horizontal: L1, L2, L3, N, GND, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

ZBN 18:UNBEDRUCKT - Zack marker strip

2809128

<https://www.phoenixcontact.com/us/products/2809128>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/us/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

VAL-MS-T1/T2 48/12.5 ST - Type 1/2 surge protection plug

2801242

<https://www.phoenixcontact.com/us/products/2801242>



L-N replacement plug for VAL-MS-T1/T2 48/12.5 plug-in lighting/surge arrester.

VAL-MS-T1/T2 48/12.5/2+0/1U/FM - Lightning/surge arrester type 1/2



2907042

<https://www.phoenixcontact.com/us/products/2907042>

VAL-MS BE/2+0/1U/FM - Base element

2907037

<https://www.phoenixcontact.com/us/products/2907037>



Universal plug-in surge arrester base for up to 240 V applications with two conductors plus ground, with remote indication contact

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com