
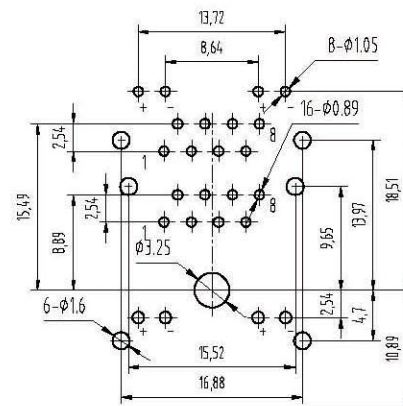

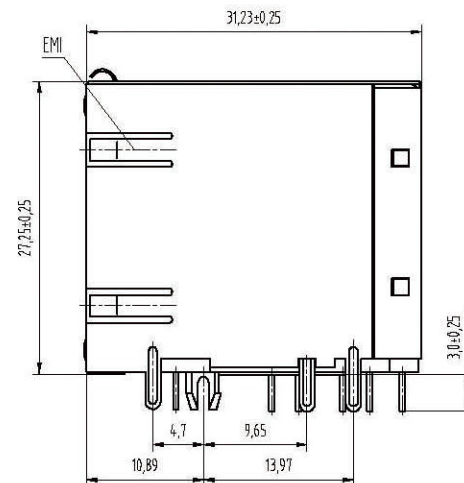


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

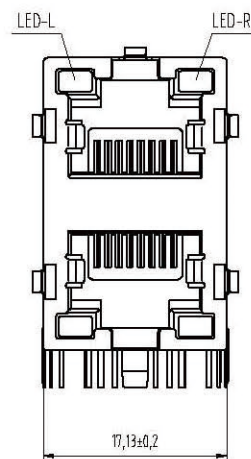

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

- | | |
|--------------------|---|
| 1.HOUSING MATERIAL | :GLASS FILLED POLYESTER UL94V-0. |
| 2.CONTACT MATERIAL | :PHOSPHOR BRONZE $\phi 0.45\text{mm}$. |
| 3.PLATING | :GOLD PLATING $\text{Fu}^{+} 50\text{u}''$ OVER NICKEL. |
| 4.SHIELD | :0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED. |
| 5.LED | :OPTION |

ELECTRICAL:

- | | |
|--------------------------------------|-----------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :1.5 AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC. |
| 5.DIELECTRIC WITHSTANDING RESISTANCE | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:

- | | |
|----------------------------|------------------|
| 1.DURRABILITY | :750 CYCLES MIN. |
| 2.PCB RETENTION PRE-SOLDER | :1 LB MIN. |

ENVIRONMENTAL:

- | | |
|--------------|----------------|
| 1.STORAGE | : -40°C~+85°C |
| 2. OPERATION | : 0°C TO 70°C. |

DETACHED LISTS	MM (INCH)		设计 zhangwei	日期 13.03.10	深圳市连欣科技有限公司	
	一般公差		审核	日期		
	MM		批准 zhang ke	日期 13.03.10	系列	名称
	.0 ± 0.20	$\pm$	材料:			RJ45 1*2双层带灯(正弹)
	.00 ± 0.15	$\pm$	数量:		图号 JR-99B-2X1-002	版本
	.000 ± 0.075	$\pm$	表面处理:		料号: XDRJ-1609-002	A4 A
	角度 $\pm 0.01^{\circ}$		比例: 1:1		不按比例	共 X 页 第 Y 页
		第三角视图				

8

7

6

5

4

3

2

1