



Dual Band 5GHz 2x2 MIMO 802.11ac Mini PCle WiFi Module

Designed for Dual Band Wireless Access Points



Model: WLE600VX

KEY FEATURES

- Qualcomm Atheros QCA9882
- 2.4GHz max 2IdBm & 5GHz max 2OdBm output power (per chain)
- IEEE 802.11ac compliant & backward compatible with 802.11a/b/g/n
- 2x2 MIMO Technology, up to 867Mbps
- Mini PCI Express edge connector
- Supports Spatial Multiplexing, Cyclic-Delay Diversity (CDD), Low-Density Parity Check (LDPC) Codes, Maximal Ratio Combining (MRC), Space Time Block Code (STBC)
- Supports IEEE 802.11d, e, h, i, k, r, v time stamp, and w standards
- Supports Dynamic Frequency Selection (DFS)
- Cards are individually calibrated for Quality Assurance

Specifications

Chipset	QCA9882	
Reference Design	XB140	
Host Interface	Mini PCI Express 1.1 Standard	
Operating Voltage	3.3V DC	
Antenna Connector	2x U.FL	
Frequency Range	2.4GHz: 2.412GHz to 2.472GHz, or 5GHz: 5.180GHz to 5.825GHz, selectable dual band	
Certification	FCC & CE Certified, RoHS Compliant	
Power Consumption	3.5W (Max)	
Supported Operating System	Supported by CompexWRT with Qualcomm Atheros reference wireless drivers or OpenWRT/LEDE with ath10k wireless drivers, on WPJ344, WPJ558, WPJ563, WPJ564, WPQ864, and WPQ865.	
Modulation Techniques	OFDM: BPSK, QPSK, DBPSK, DQPSK, 16-QAM, 64-QAM, 256-QAM	
Environmental Temperature	Operating: -20°C to 70°C, Storage: -40°C to 90°C	
Environmental Humidity, non-condensing	Operating: 5% to 95%, Storage: Max. 90%	
ESD Sensitivity	Class 1C	
Dimensions (W × H × D)	30.0mm × 50.9mm × 3.2mm	



WIRELESS MODULES

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
2.4GHz	1Mbps	20dBm	23dBm	±2dB
	2Mbps	20dBm	23dBm	±2dB
802.11b	5.5Mbps	20dBm	23dBm	±2dB
	11Mbps	20dBm	23dBm	±2dB
	6Mbps	21dBm	24dBm	±2dB
	9Mbps	21dBm	24dBm	±2dB
	12Mbps	21dBm	24dBm	±2dB
2.4GHz	18Mbps	21dBm	24dBm	±2dB
802.11g	24Mbps	21dBm	24dBm	±2dB
	36Mbps	20dBm	23dBm	±2dB
	48Mbps	19dBm	22dBm	±2dB
	54Mbps	18dBm	21dBm	±2dB
	MCS 0	21dBm	24dBm	±2dB
	MCS 1	21dBm	24dBm	±2dB
	MCS 2	21dBm	24dBm	±2dB
2.4GHz	MCS 3	20dBm	23dBm	±2dB
802.11n HT20	MCS 4	20dBm	23dBm	±2dB
0	MCS 5	20dBm	23dBm	±2dB
	MCS 6	18dBm	21dBm	±2dB
	MCS 7	16dBm	19dBm	±2dB
	MCS 0	20dBm	23dBm	±2dB
2.4GHz	MCS 1	20dBm	23dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB
	MCS 3	19dBm	22dBm	±2dB
802.11n HT40	MCS 4	19dBm	22dBm	±2dB
	MCS 5	19dBm	22dBm	±2dB
	MCS 6	18dBm	21dBm	±2dB
	MCS 7	16dBm	19dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	-95dBm	±2dB
	2Mbps	-94dBm	±2dB
	5.5Mbps	-92dBm	±2dB
	11Mbps	-90dBm	±2dB
	6Mbps	-94dBm	±2dB
	9Mbps	-93dBm	±2dB
2.4GHz	12Mbps	-92dBm	±2dB
	18Mbps	-90dBm	±2dB
802.11g	24Mbps	-88dBm	±2dB
	36Mbps	-85dBm	±2dB
	48Mbps	-81dBm	±2dB
	54Mbps	-80dBm	±2dB
	MCS 0	-93dBm	±2dB
	MCS 1	-91dBm	±2dB
	MCS 2	-89dBm	±2dB
2.4GHz	MCS 3	-84dBm	±2dB
802.11n HT20	MCS 4	-83dBm	±2dB
20	MCS 5	-78dBm	±2dB
	MCS 6	-78dBm	±2dB
	MCS 7	-76dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	-92dBm	±2dB
	MCS 1	-88dBm	±2dB
	MCS 2	-85dBm	±2dB
	MCS 3	-82dBm	±2dB
	MCS 4	-79dBm	±2dB
	MCS 5	-75dBm	±2dB
	MCS 6	-75dBm	±2dB
	MCS 7	-73dBm	±2dB







RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
	6Mbps	20dBm	23dBm	±2dB
5GHz 802.11a	9Mbps	20dBm	23dBm	±2dB
	12Mbps	20dBm	23dBm	±2dB
	18Mbps	20dBm	23dBm	±2dB
	24Mbps	20dBm	23dBm	±2dB
	36Mbps	18dBm	21dBm	±2dB
	48Mbps	16dBm	19dBm	±2dB
	54Mbps	15dBm	18dBm	±2dB
	MCS 0	19dBm	22dBm	±2dB
	MCS 1	19dBm	22dBm	±2dB
	MCS 2	19dBm	22dBm	±2dB
5GHz	MCS 3	18dBm	21dBm	±2dB
802.11n/ac	MCS 4	18dBm	21dBm	±2dB
HT20	MCS 5	17dBm	20dBm	±2dB
	MCS 6	16dBm	19dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	13dBm	16dBm	±2dB
	MCS 0	18dBm	21dBm	±2dB
	MCS 1	18dBm	21dBm	±2dB
	MCS 2	18dBm	21dBm	±2dB
	MCS 3	17dBm	20dBm	±2dB
5GHz 802.11n/ac	MCS 4	17dBm	20dBm	±2dB
HT40	MCS 5	16dBm	19dBm	±2dB
-	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	13dBm	16dBm	±2dB
	MCS 9	13dBm	16dBm	±2dB
	MCS 0	18dBm	21dBm	±2dB
	MCS 1	18dBm	21dBm	±2dB
	MCS 2	18dBm	21dBm	±2dB
5GHz	MCS 3	17dBm	20dBm	±2dB
	MCS 4	17dBm	20dBm	±2dB
802.11ac HT80	MCS 5	16dBm	19dBm	±2dB
	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	13dBm	16dBm	±2dB
	MCS 9	13dBm	16dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
	6Mbps	-94dBm	±2dB
	9Mbps	-94dBm	±2dB
	12Mbps	-92dBm	±2dB
5GHz	18Mbps	-90dBm	±2dB
802.11a	24Mbps	-86dBm	±2dB
	36Mbps	-84dBm	±2dB
	48Mbps	-81dBm	±2dB
	54Mbps	-80dBm	±2dB
	MCS 0	-93dBm	±2dB
	MCS 1	-90dBm	±2dB
	MCS 2	-87dBm	±2dB
5GHz	MCS 3	-83dBm	±2dB
802.11n/ac	MCS 4	-80dBm	±2dB
HT20	MCS 5	-77dBm	±2dB
	MCS 6	-74dBm	±2dB
	MCS 7	-73dBm	±2dB
	MCS 8	-71dBm	±2dB
	MCS 0	-90dBm	±2dB
	MCS 1	-88dBm	±2dB
	MCS 2	-85dBm	±2dB
	MCS 3	-82dBm	±2dB
5GHz 802.11n/ac	MCS 4	-79dBm	±2dB
HT40	MCS 5	-75dBm	±2dB
	MCS 6	-73dBm	±2dB
	MCS 7	-73dBm	±2dB
	MCS 8	-69dBm	±2dB
	MCS 9	-66dBm	±2dB
	MCS 0	-88dBm	±2dB
	MCS 1	-86dBm	±2dB
5GHz 802.11ac HT80	MCS 2	-84dBm	±2dB
	MCS 3	-81dBm	±2dB
	MCS 4	-77dBm	±2dB
	MCS 5	-74dBm	±2dB
	MCS 6	-73dBm	±2dB
	MCS 7	-70dBm	±2dB
	MCS 8	-67dBm	±2dB
	MCS 9	-65dBm	±2dB






Connector Map



Mechanical Dimensions

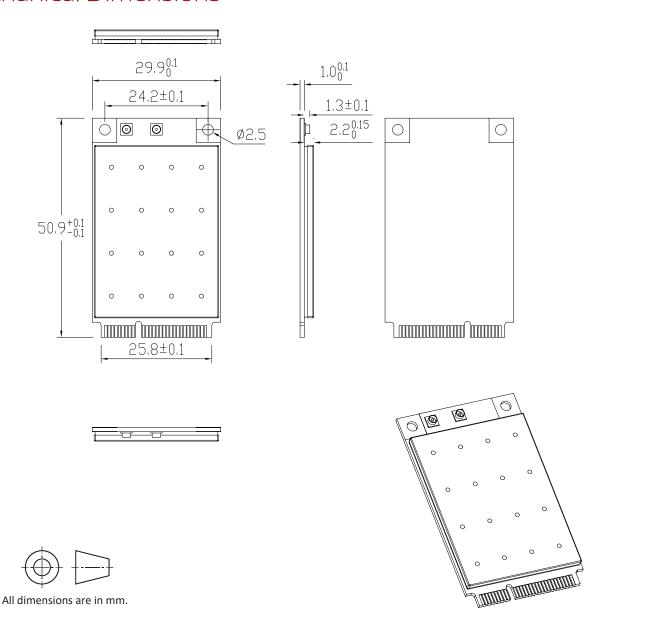





WIRELESS MODULES

Ordering Configuration

Item Code	Model	Description
WLE600VX 7AA000S	WLE600VX	2x2 802.11a/b/g/n/ac 2.4GHz/5GHz miniPCle card

