



Features

- 1 % tolerance from 1.02 megohms to 10 megohms
- RoHS compliant*
- Power rating at 70 °C: CRH0603 - 0.10 W, CRH0805 - 0.125 W, CRH1206 - 0.25 W
- Suitable for all types of soldering processes



CRH0603/CRH0805/CRH1206 - Chip Resistors


Electrical Characteristics

Characteristic	Model CRH0603	Model CRH0805	Model CRH1206
Power Rating @ 70 °C	1/10 W	1/8 W	1/4 W
Operating Temperature Range	-55 °C to +125 °C		
Derated to 0 Load at	+125 °C		
Maximum Working Voltage	50 V	100 V	200 V
Maximum Overload Voltage	100 V	200 V	400 V
Resistance Range (E-96 + E-24)	1.02 megohms - 10 megohms		
Temperature Coefficient	±200 ppm/°C		

Characteristic Data

Test	ΔR Max.
Load Life (1000 hours)	< ±1 %
Short Time Overload	< ±0.5 %
Thermal Shock	< ±0.5 %

Dimensional Drawing

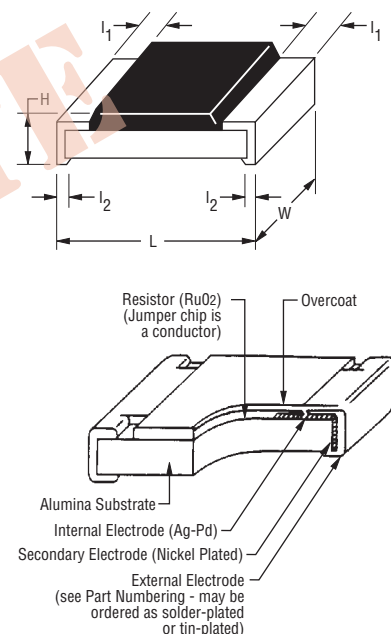


Chip Dimensions

Dimension	Model CRH0603	Model CRH0805	Model CRH1206
L	$\frac{1.60 \pm 0.10}{(0.063 \pm 0.004)}$	$\frac{2.00 \pm 0.15}{(0.079 \pm 0.006)}$	$\frac{3.20 \pm 0.25}{(0.126 \pm 0.010)}$
W	$\frac{0.80 \pm 0.10}{(0.031 \pm 0.004)}$	$\frac{1.25 \pm 0.15}{(0.049 \pm 0.006)}$	$\frac{1.60 \pm 0.15}{(0.063 \pm 0.006)}$
H	$\frac{0.45 \pm 0.10}{(0.018 \pm 0.004)}$	$\frac{0.50 \pm 0.10}{(0.020 \pm 0.004)}$	$\frac{0.60 \pm 0.15}{(0.024 \pm 0.006)}$
l ₁	$\frac{0.30 \pm 0.20}{(0.012 \pm 0.008)}$	$\frac{0.40 \pm 0.20}{(0.016 \pm 0.008)}$	$\frac{0.50 \pm 0.25}{(0.020 \pm 0.010)}$
l ₂	$\frac{0.30 \pm 0.20}{(0.012 \pm 0.008)}$	$\frac{0.40 \pm 0.20}{(0.016 \pm 0.008)}$	$\frac{0.50 \pm 0.20}{(0.020 \pm 0.010)}$

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Derating Curve

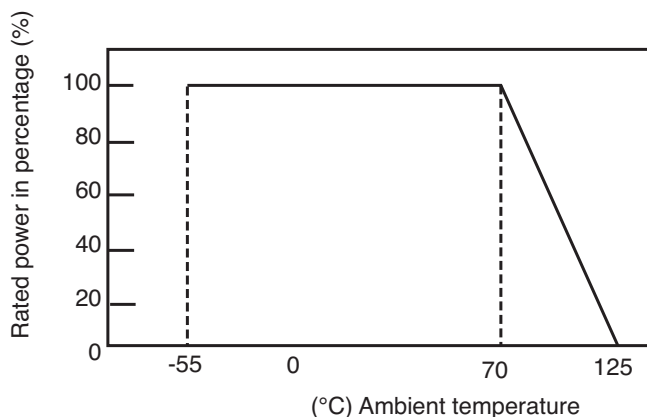

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.


Features (Continued)

- Three layer contacting process with nickel barrier helps prevent leaching and provides excellent solderability
- Paper tape on reel for automatic placement


CRH0603/CRH0805/CRH1206 - Chip Resistors

BOURNS®

Soldering Profile for RoHS Compliant Chip Resistors and Arrays

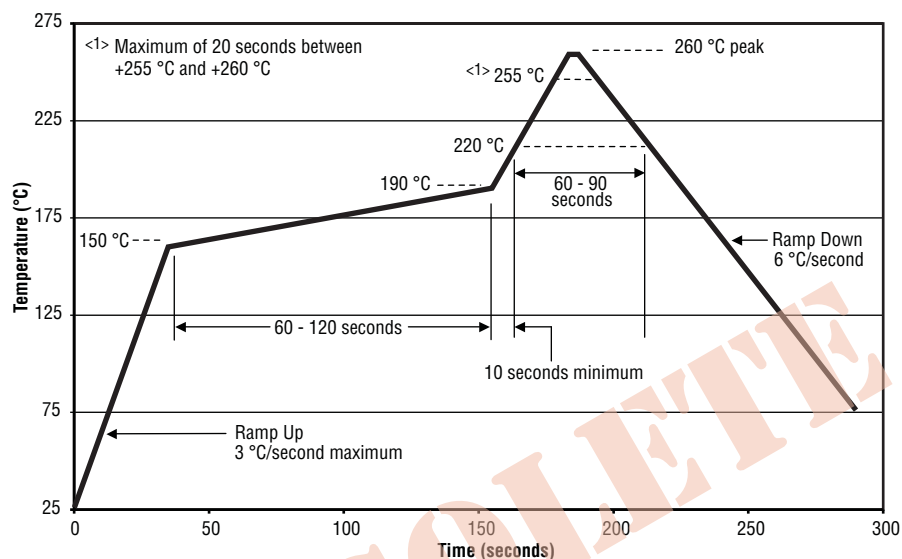

Packaging Dimensions (Conforms to EIA RS-481A)

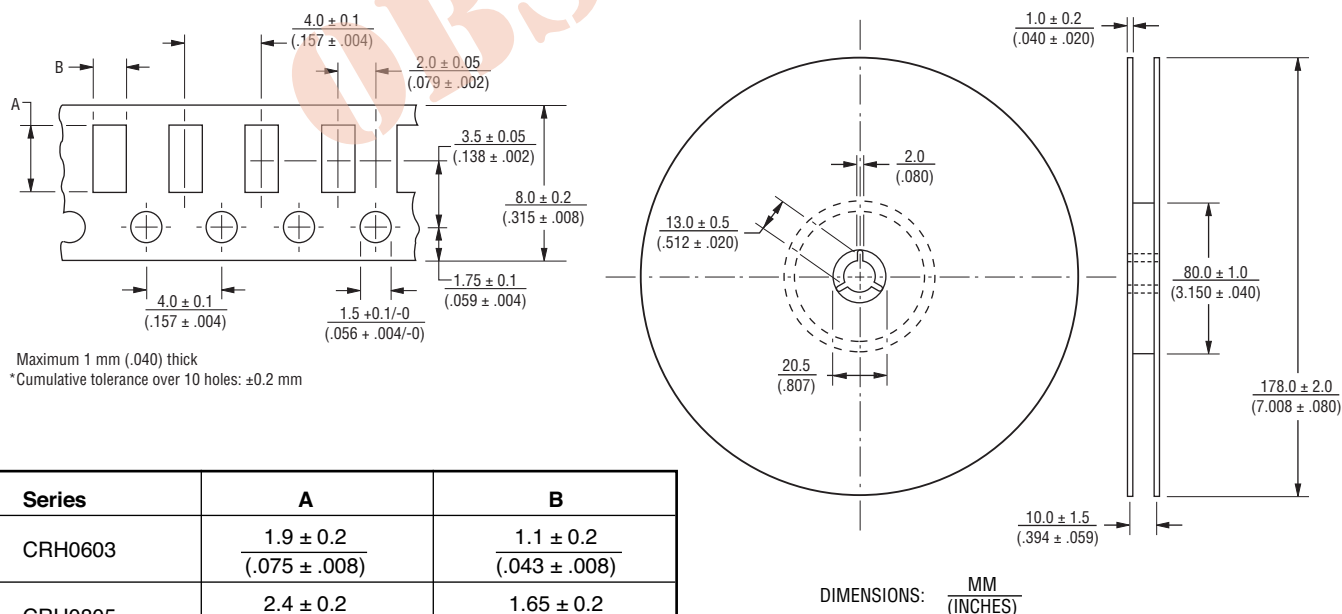

Series	A	B
CRH0603	$\frac{1.9 \pm 0.2}{(.075 \pm .008)}$	$\frac{1.1 \pm 0.2}{(.043 \pm .008)}$
CRH0805	$\frac{2.4 \pm 0.2}{(.094 \pm .008)}$	$\frac{1.65 \pm 0.2}{(.065 \pm .008)}$
CRH1206	$\frac{3.57 \pm 0.2}{(.161 \pm .008)}$	$\frac{2.00 \pm 0.2}{(.079 \pm .008)}$

Marking on reel: Part number, quantity, resistance value and tolerance, date code.

Specifications are subject to change without notice.
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.

CRH0603/CRH0805/CRH1206 - Chip Resistors

BOURNS®

Resistor Markings

CRH0805
CRH1206



E-96 marking
Value = 44.2K ohms

CRH0603
EIA-96 Marking



1 % marking
Value = 12.4K ohms

Marking Explanation

- E-96: 4 digits, first three digits are significant, fourth digit is number of zeros to follow.
Letter R is decimal point.
- 0603 E-96: EIA-96 marking (see table below).

EIA-96 Marking for CRH0603, 1 %

Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value
01	100	13	133	25	178	37	237	49	316	61	422	73	562	85	750
02	102	14	137	26	182	38	243	50	324	62	432	74	576	86	768
03	105	15	140	27	187	39	249	51	332	63	442	75	590	87	787
04	107	16	143	28	191	40	255	52	340	64	453	76	604	88	806
05	110	17	147	29	196	41	261	53	348	65	464	77	619	89	825
06	113	18	150	30	200	42	267	54	357	66	475	78	634	90	845
07	115	19	154	31	205	43	274	55	365	67	487	79	649	91	866
08	118	20	158	32	210	44	280	56	374	68	499	80	665	92	887
09	121	21	162	33	215	45	287	57	383	69	511	81	681	93	909
10	124	22	165	34	221	46	294	58	392	70	523	82	698	94	931
11	127	23	169	35	226	47	301	59	402	71	536	83	715	95	953
12	130	24	174	36	232	48	309	60	412	72	549	84	732	96	976

This table shows the first two digits for the three-digit EIA-96 part marking scheme. The third character is a letter multiplier:
Y=10⁻² X=10⁻¹ A=10⁰ B=10¹ C=10² D=10³ E=10⁴ F=10⁵

How to Order

CRH 1206 - F W - 1024 E LF

Model _____
(CRH = Chip Resistor High Value)

Size _____

- 0603
- 0805
- 1206

Resistance Tolerance _____

F = ±1 %

TCR (ppm/°C) _____

W = ±200

Resistance Value _____

±1 %, 1.02 megohms through 10 megohms First three digits are significant, fourth digit represents number of zeros to follow
(example: 1024 = 1.02 megohms).

Packaging _____

E = Paper Tape (5,000 pcs.) on 7 " Plastic Reel

Termination _____

LF = Tin-plated (RoHS compliant)

REV. 09/15

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.