
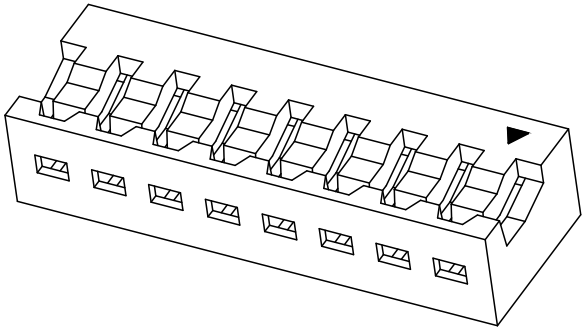





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.12	阿树

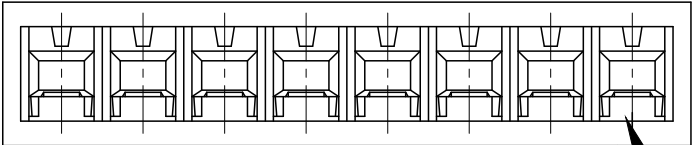

PART NO.:

X1259 H V-XX-N0 XX
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:H-HSG
③Welding Board AngleV-Straight 180°
④Row No-Pin No:XX-02P~15P
⑤Material:N0-PA66 94V-0
⑥Color: Blank-Natural Color

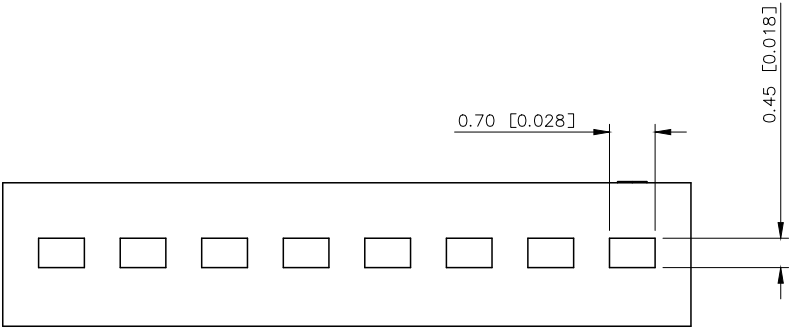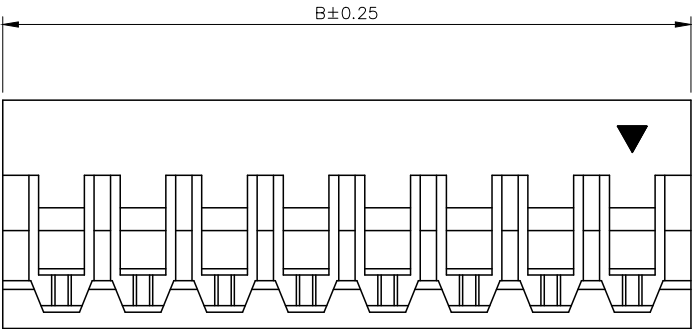

- SPECIFICATIONS
•Voltage rating:500V AC/DC
•Current rating:1A AC/DC
•Withstanding Voltage:250V AC/minute
•Temperature range: -40°C~+125°C
•Insulation resistance: ≥100MΩ
•Contact resistance: ≤10mΩ
•After environment testing: ≤20mΩ

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	1.25	3.05	9	10.00	11.80
3	2.50	4.30	10	11.50	13.05
4	3.75	5.55	11	12.50	14.30
5	5.00	6.80	12	13.75	15.55
6	6.25	8.05	13	15.00	16.80
7	7.50	9.30	14	16.25	18.05
8	8.75	10.55	15	17.50	19.30

X1259HV-XX-N0	Nylon 66 UL 94V-0	1259BT
PART NO	Material	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.25mm Board In Connectors
CHECKED		UNIT:	mm/in	PART NO.: X1259HV-XX-N0
APPROVED		SIZE:	A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1