

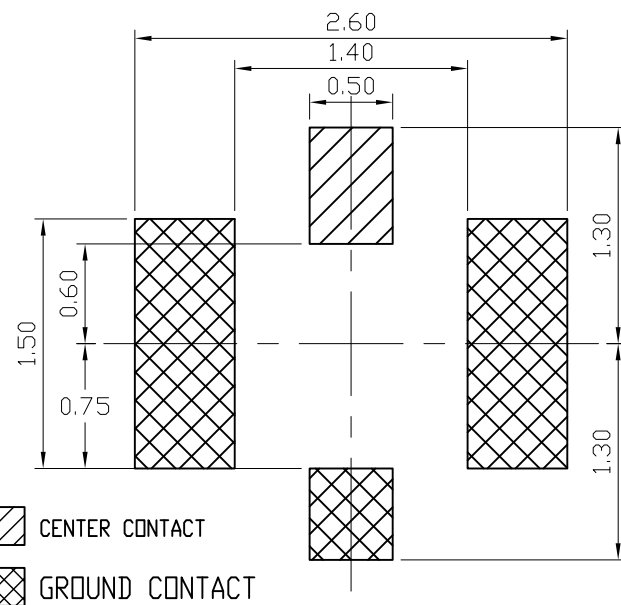
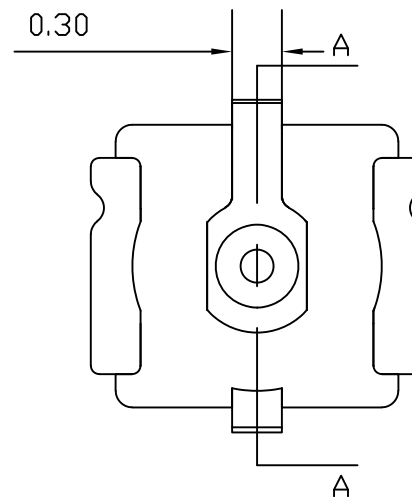
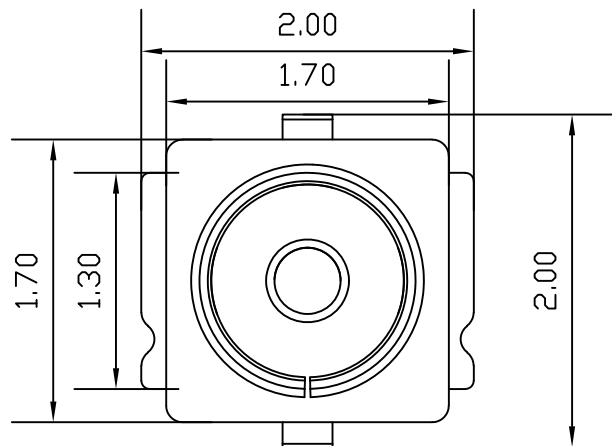


NOTES :

- 1.1. VOLTAGE :60 VAC (R.M.S.)
- 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ω m
- 1.3. APPLICABLE FREQUENCY: DC ~ 6GHz
- 1.4. VSWR: 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)
- 1.5. TEMPERATURE : -40°C TO +85°C

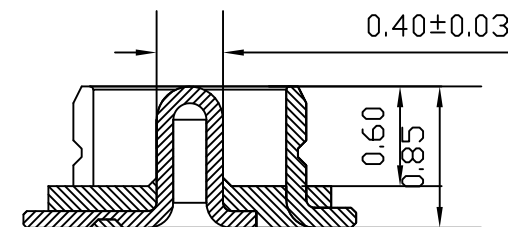

RECOMMENDED PCB LAYOUT
(TOLERANCE: ± 0.05)

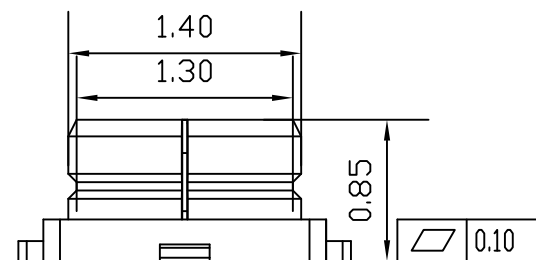

SECTION A-A



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ± 0.30

X.XX ± 0.25

X.XXX ± 0.15

X.* $\pm 2^{\circ}$ X.X* $\pm 0.5^{\circ}$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

RF 三代板端天线座

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYCW03-RF2285-085B

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-RF13201092

SHEET NO.

1 OF 1