
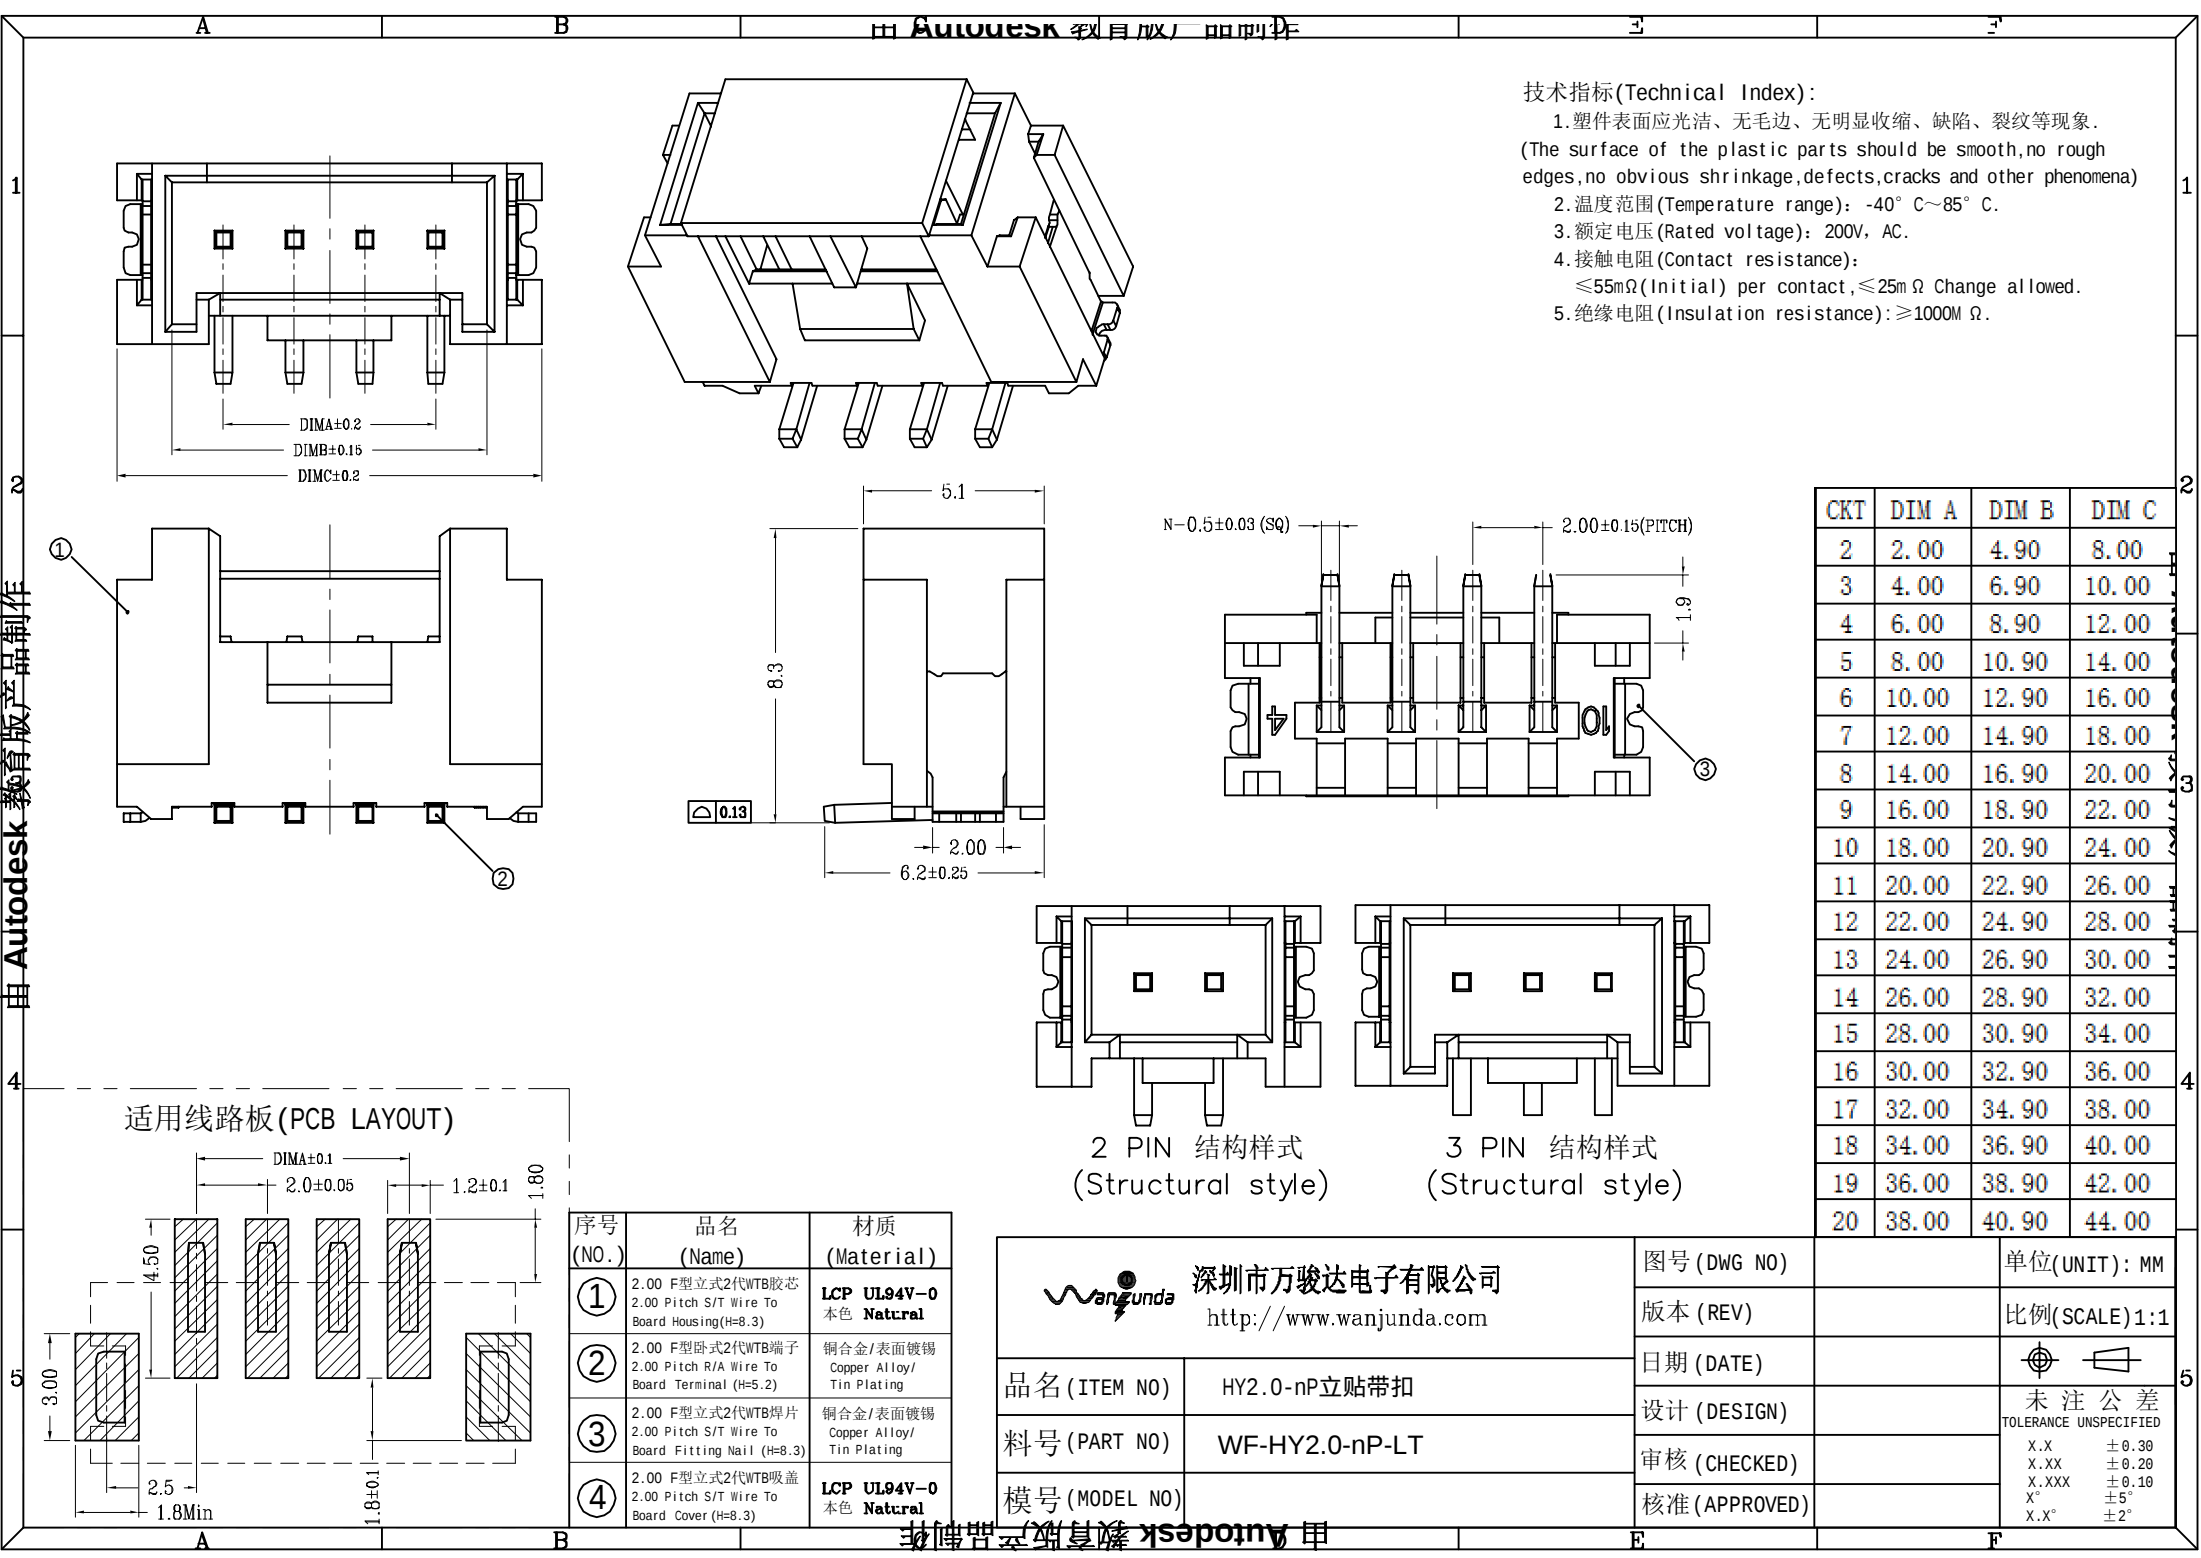




技术指标(Technical Index):

- 1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth,no rough edges,no obvious shrinkage,defects,cracks and other phenomena)
- 2. 温度范围(Temperature range): -40° C~85° C.
- 3. 额定电压(Rated voltage): 200V, AC.
- 4. 接触电阻(Contact resistance):
≤55mΩ(Initial) per contact, ≤25mΩ Change allowed.
- 5. 绝缘电阻(Insulation resistance): ≥1000M Ω.

CKT	DIM A	DIM B	DIM C
2	2.00	4.90	8.00
3	4.00	6.90	10.00
4	6.00	8.90	12.00
5	8.00	10.90	14.00
6	10.00	12.90	16.00
7	12.00	14.90	18.00
8	14.00	16.90	20.00
9	16.00	18.90	22.00
10	18.00	20.90	24.00
11	20.00	22.90	26.00
12	22.00	24.90	28.00
13	24.00	26.90	30.00
14	26.00	28.90	32.00
15	28.00	30.90	34.00
16	30.00	32.90	36.00
17	32.00	34.90	38.00
18	34.00	36.90	40.00
19	36.00	38.90	42.00
20	38.00	40.90	44.00

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位(UNIT): MM
		版本 (REV)		比例(SCALE) 1:1
品 名 (ITEM NO)		HY2.0-nP立贴带扣	日期 (DATE)	 未 注 公 差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°
料号 (PART NO)		WF-HY2.0-nP-LT	设计 (DESIGN)	
模号 (MODEL NO)			审核 (CHECKED)	
			核准 (APPROVED)	