
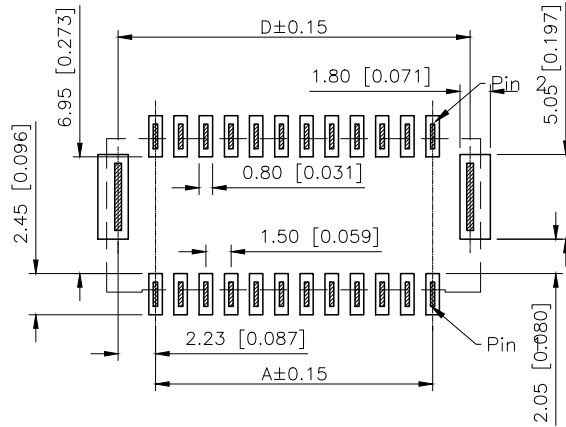


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	
A1	N/A		图面升级整理图面	2024.08.29

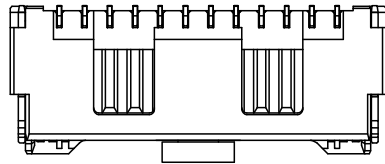

Recommended PCB Layout
Tolerance:±0.05

■SPECIFICATIONS

- Voltage rating:100V AC/DC
- Current rating:1.5A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥500MΩ
- Contact resistance:≤20mΩ

PART NO.:

X1515 W V S-2xXX-LP SW
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:V-Stright 180°
- 4.WELDING Way:S-SMT
- 5.Row No.Pin No:2xXX-2x04~2x14Pin
- 6.Material:LP-LCP UL94V-0
- 7.Plating:SW-Matte Tin Plated

Poles	Dimensions(mm)			
	A	B	C	D
2x04	4.50	10.30	8.50	8.95
2x05	6.00	11.80	10.00	10.45
2x06	7.50	13.30	11.50	11.95
2x07	9.00	14.80	13.00	13.45
2x08	10.50	16.30	14.50	14.95
2x09	12.00	17.80	16.00	16.45
2x10	13.50	19.30	17.50	17.95
2x11	15.00	20.80	19.00	19.45
2x12	16.50	22.30	20.50	20.95
2x13	18.00	23.80	22.00	22.45
2x14	19.50	25.30	23.50	23.95

X1515WVS-2xXX-LPSW	LCP	Phosphor Bronze	X1515H-A
PART NO	Material	Material(Pin)	Suitable XKB Housing

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.5mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X1515WVS-2xXX-LPSW
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1