


M12 3 POLE
FEMALE

Pos A & B

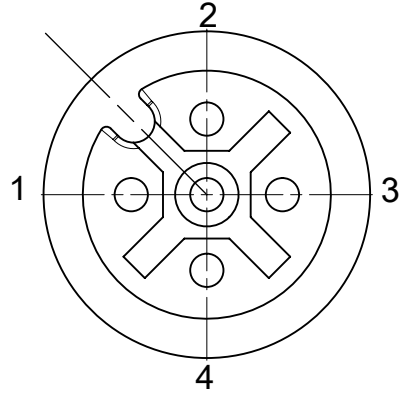

VIEW FROM THE FRONT SIDE

Pin	Wire color
1	BROWN
2	-
3	BLUE
4	BLACK


NOTES:
ELECTRICAL DATA:
VOLTAGE RATING: 250V
AMPERAGE RATING: 4A
INSULATION RESISTANCE: 10⁸ Ω MIN.
MATING CYCLES: MIN. 100

ENVIRONMENTAL:
PROTECTION: IP67
OPERATING TEMPERATURE:
STATIC: -25°C TO +80°C
FLEXING: -5°C TO +80°C

Pos B
Female M12


Pos A
Female M12

WIRING DIAGRAM

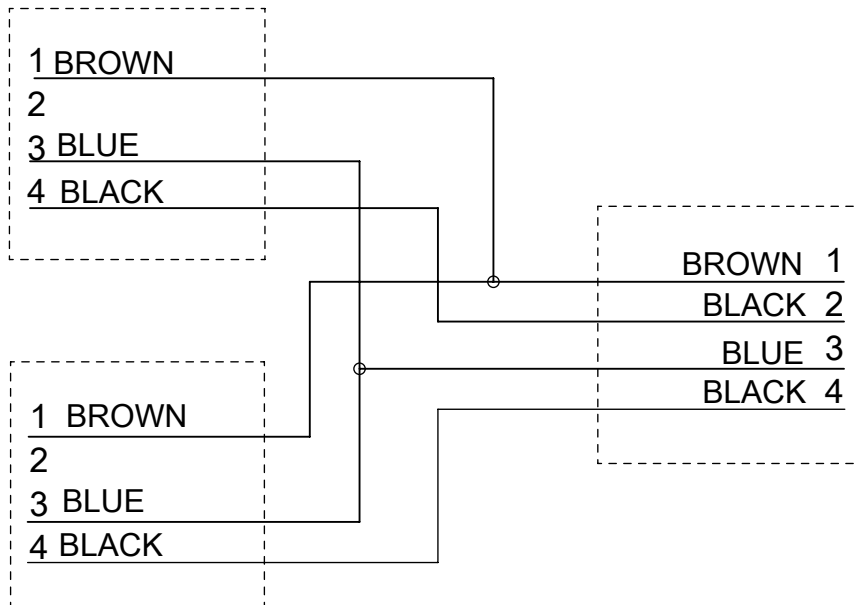


ILS
Male M12

ILS M12 4 POLE
MALE

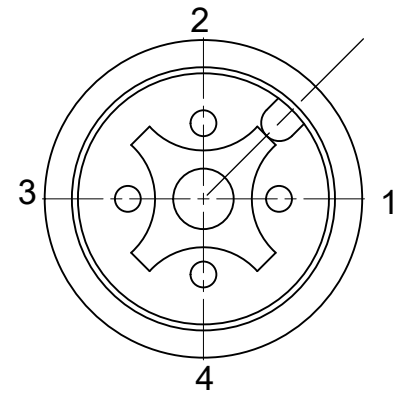

VIEW FROM THE FRONT SIDE

Pin	Wire color
1	BROWN A+B
2	BLACK B
3	BLUE A+B
4	BLACK A

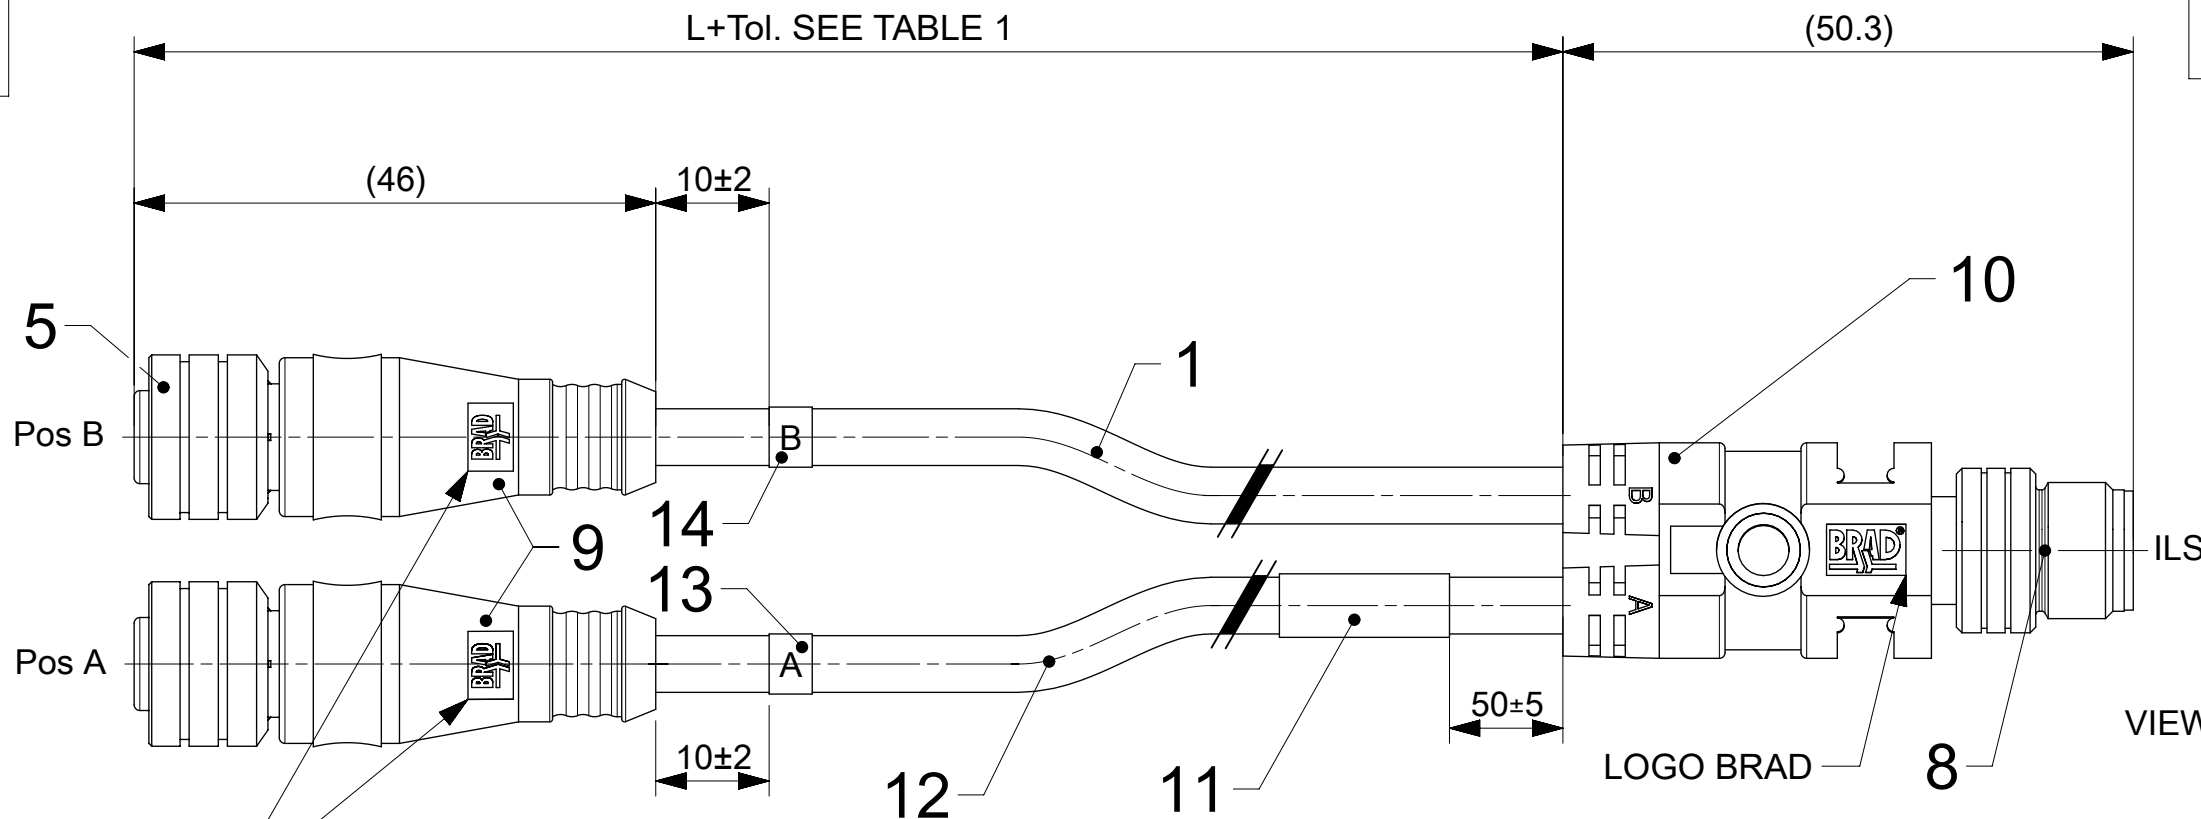

VIEW FROM THE FRONT SIDE

LOGO BRAD

VIEW FROM THE FRONT SIDE

NOTES:
1. DIMENSION WITHOUT TOLERANCE ARE REFERENTIAL
2. FOR CABLES IXX AND IF IN MATRIX IS "H" - ADD ID-CARRIER'S ON THE BOTH SIDES HARNESS
3. BOM - SEE SHEET 2
4. MATRIX - SEE SHEET 2

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CHANGED FROM MOLEX INTERNAL TO GENERAL MARKET		molex			
	mm		3:2							
	GENERAL TOLERANCES (UNLESS SPECIFIED)						ILS 4P MM/ST 2XFE ST/ST XM			
	ANGULAR TOL ± °									
4 PLACES		±								
DIVISIONAL SYMBOLS	3 PLACES		±		DRWN: RSCHIEBER					

DOCUMENT STATUS	P1	RELEASE DATE	2022/05/20	09:56:11
-----------------	----	--------------	------------	----------

